



US006423063B1

(12) **United States Patent**
Bonutti

(10) **Patent No.:** **US 6,423,063 B1**
(45) **Date of Patent:** ***Jul. 23, 2002**

(54) **CHANGING RELATIONSHIP BETWEEN BONES**

(76) Inventor: **Peter M. Bonutti**, 1303 W. Evergreen Plz., Effingham, IL (US) 62401

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **09/569,020**

(22) Filed: **May 11, 2000**

Related U.S. Application Data

(63) Continuation of application No. 09/137,443, filed on Aug. 20, 1998, now Pat. No. 6,099,531.

(51) **Int. Cl.⁷** **A61B 17/68**

(52) **U.S. Cl.** **606/60; 606/99**

(58) **Field of Search** 606/87, 88, 86, 606/75, 76, 77, 60, 61, 62, 90, 105; 623/416-420, 14.12, 16.11, 17.11, 17.16, 18.11, 23.63

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,450,591 A * 5/1984 Rappaport
4,516,276 A 5/1985 Mittelmeier et al.
4,877,020 A * 10/1989 Vich
4,919,667 A * 4/1990 Richmond 623/18
5,015,255 A 5/1991 Kuslich
5,026,373 A 6/1991 Ray et al.
5,116,374 A * 5/1992 Stone 623/16
5,258,031 A 11/1993 Salib et al.
5,360,450 A 11/1994 Giannini

5,601,565 A 2/1997 Huebner
5,609,635 A 3/1997 Michelson
5,620,448 A 4/1997 Puddu
5,669,909 A 9/1997 Zdeblick et al.
5,766,251 A 6/1998 Koshino
5,836,948 A * 11/1998 Zucherman et al. 606/61
5,895,426 A 4/1999 Scarborough et al.
5,906,616 A 5/1999 Pavlov et al.
6,066,175 A * 5/2000 Henderson et al. 623/17.11
6,241,771 B1 * 6/2001 Gresser et al. 623/17.16

* cited by examiner


Primary Examiner—David O. Reip

(74) *Attorney, Agent, or Firm*—Tarolli, Sundheim, Covell, Tummino & Szabo L.L.P.





(57) **ABSTRACT**




To change a spatial relationship between two or more bones in a patient's body, a wedge member is moved into a joint between the bones. As the wedge member enters the joint, pivotal movement occurs between the bones to change the orientation of the bones relative to each other. The wedge member may have a circular cross sectional configuration and be moved into the joint by rotating the wedge member about an axis which extends between a thin leading edge portion and a thick trailing edge portion of the wedge member. Alternatively, the wedge member may have a cam-shaped configuration and be rotated through less than a revolution to apply force against the bones. The wedge member may have a porous construction which enables bone to grow through the wedge member and immobilize the joint. The wedge member may be coated with and/or contain bone growth promoting material. The wedge member may be connected to only one of the bones or may be connected to two adjacent bones. If the wedge member is connected to only one bone, the joint may be capable of being flexed after the wedge member is inserted into the joint.

35 Claims, 9 Drawing Sheets

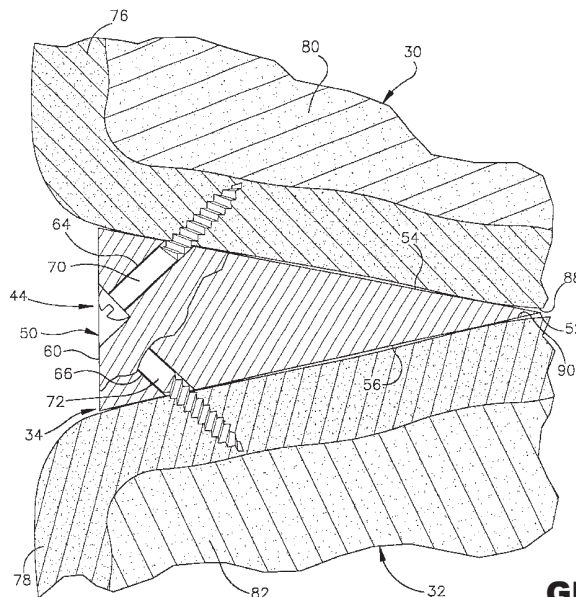

GLOBUS MEDICAL, INC.
EXHIBIT 1001
IPR2015-to be assigned
(Globus v. Bonutti)
Page 1 of 24

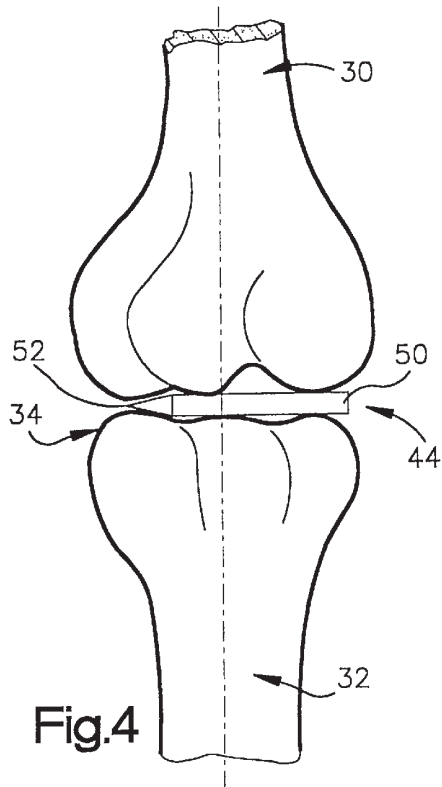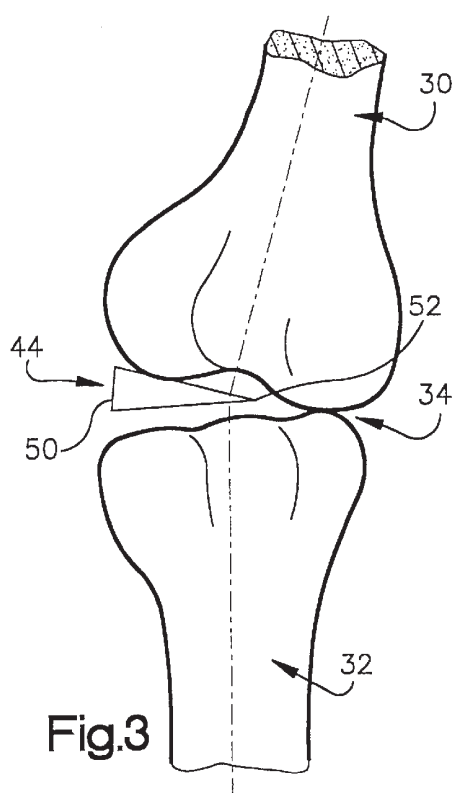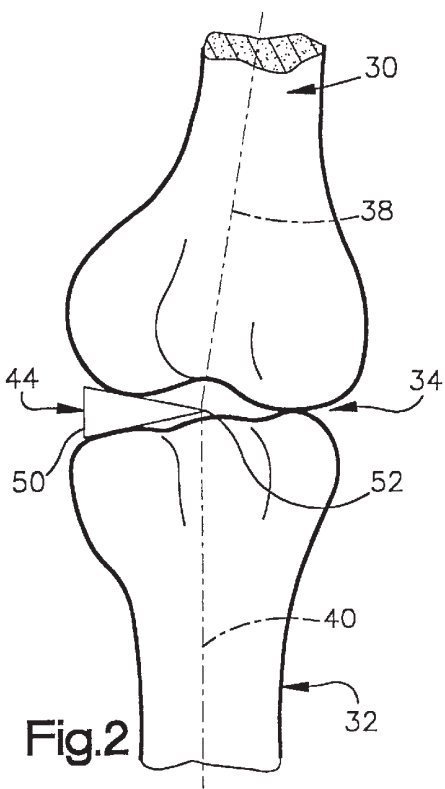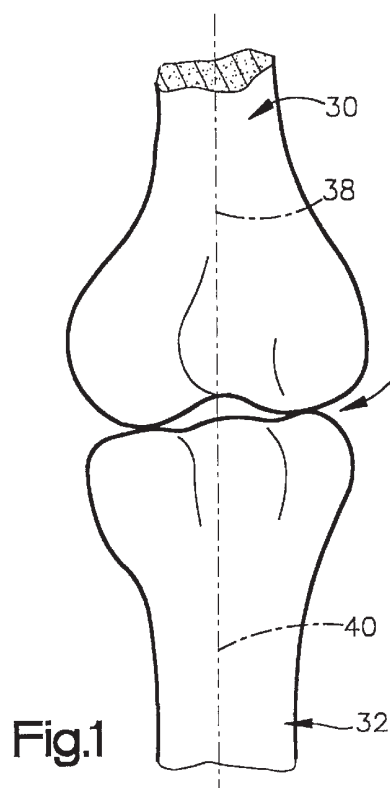

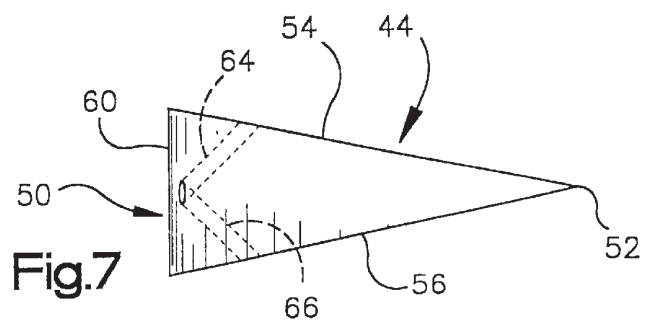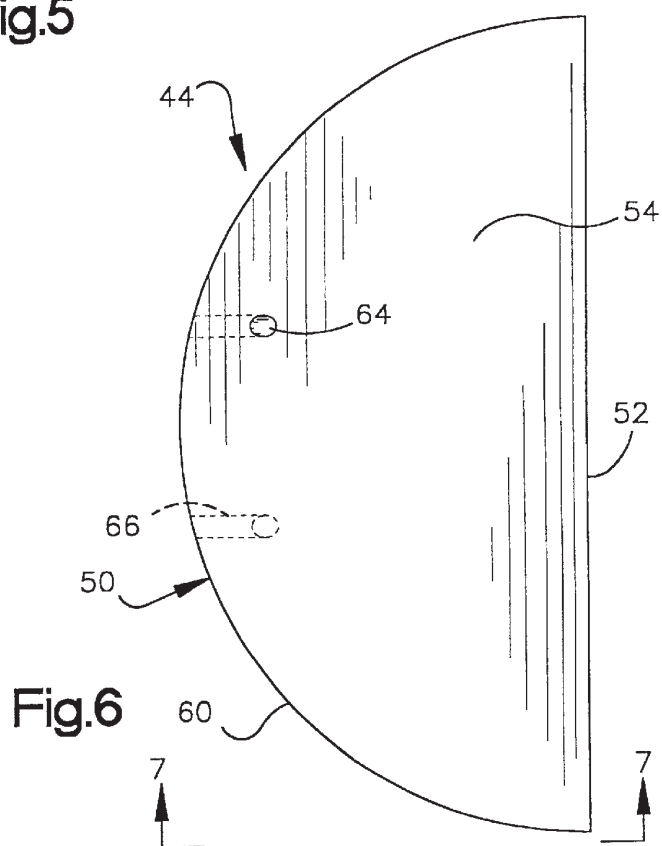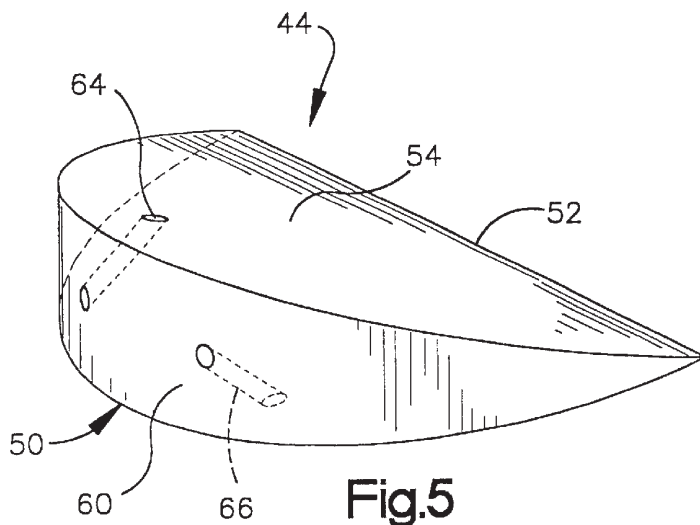

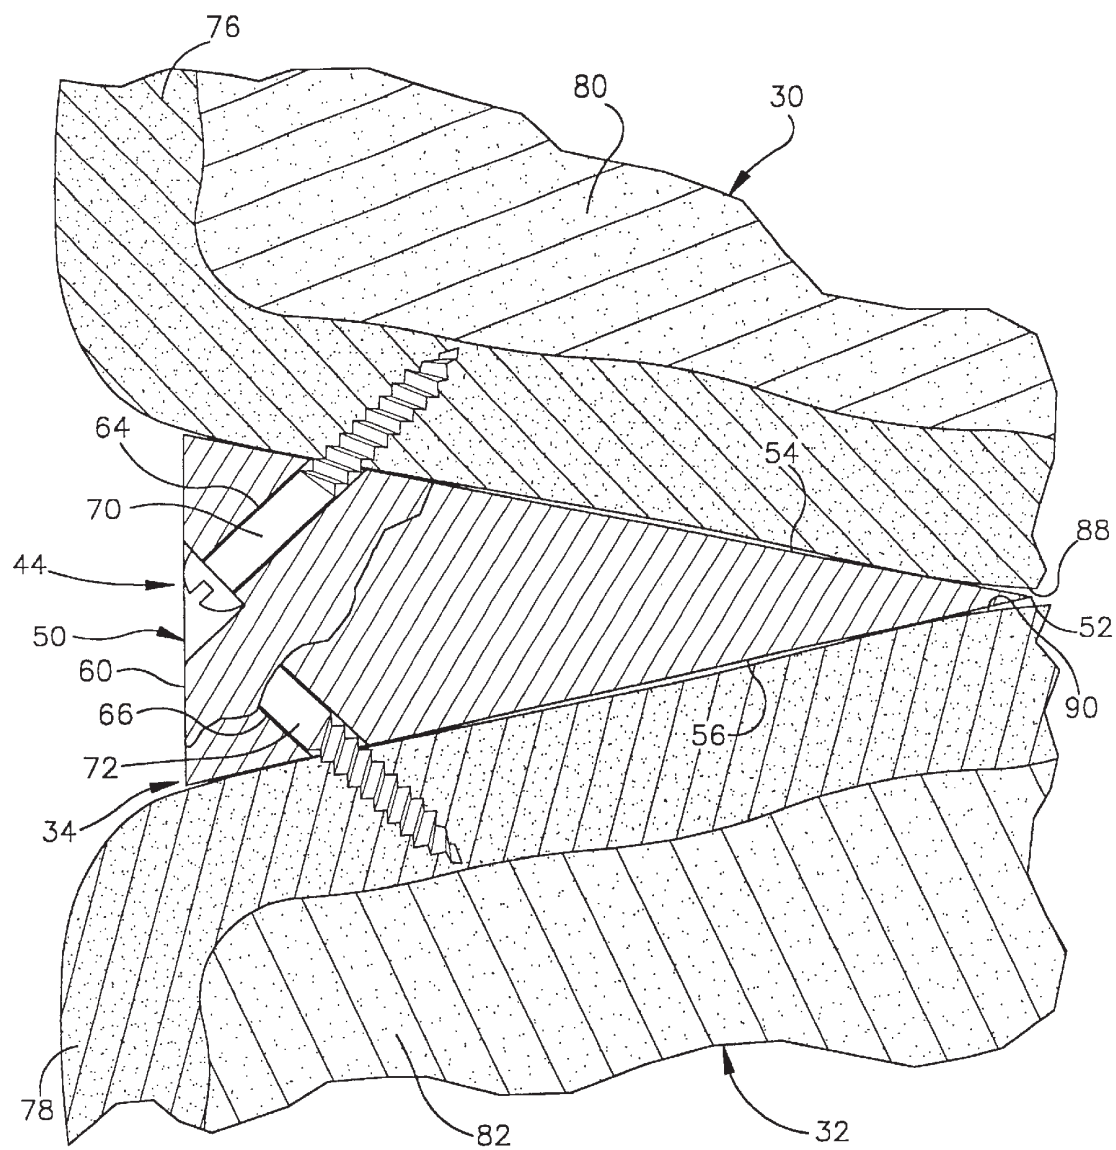
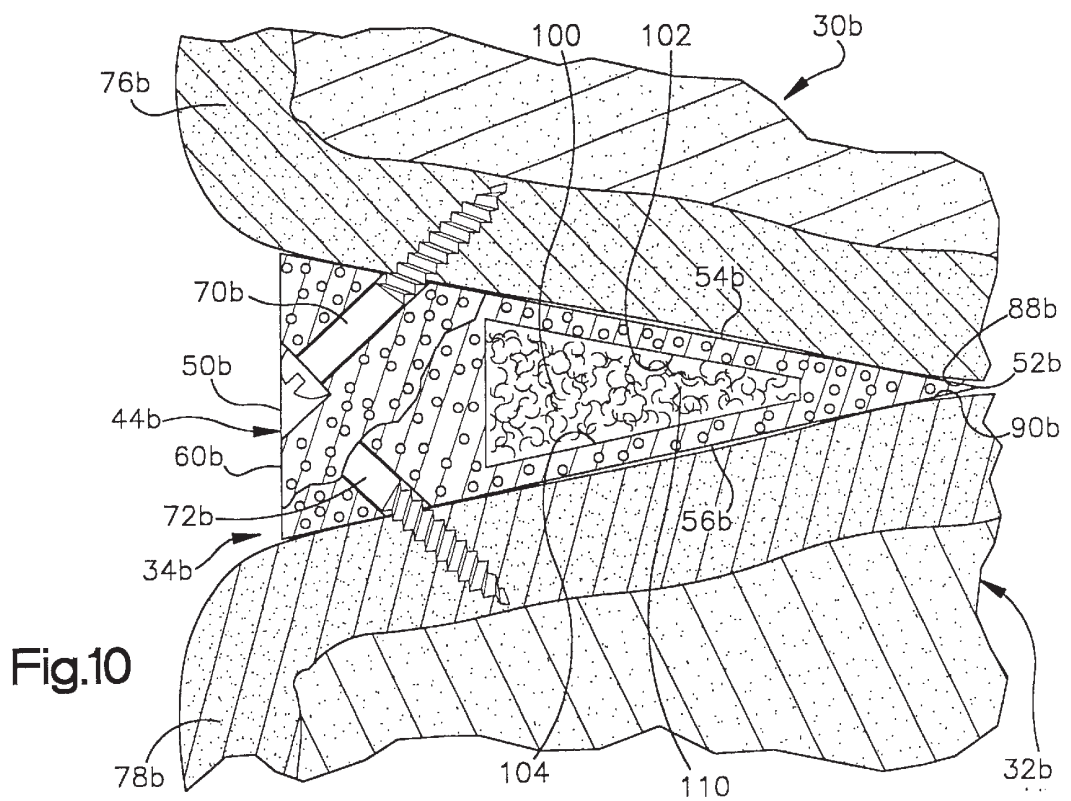
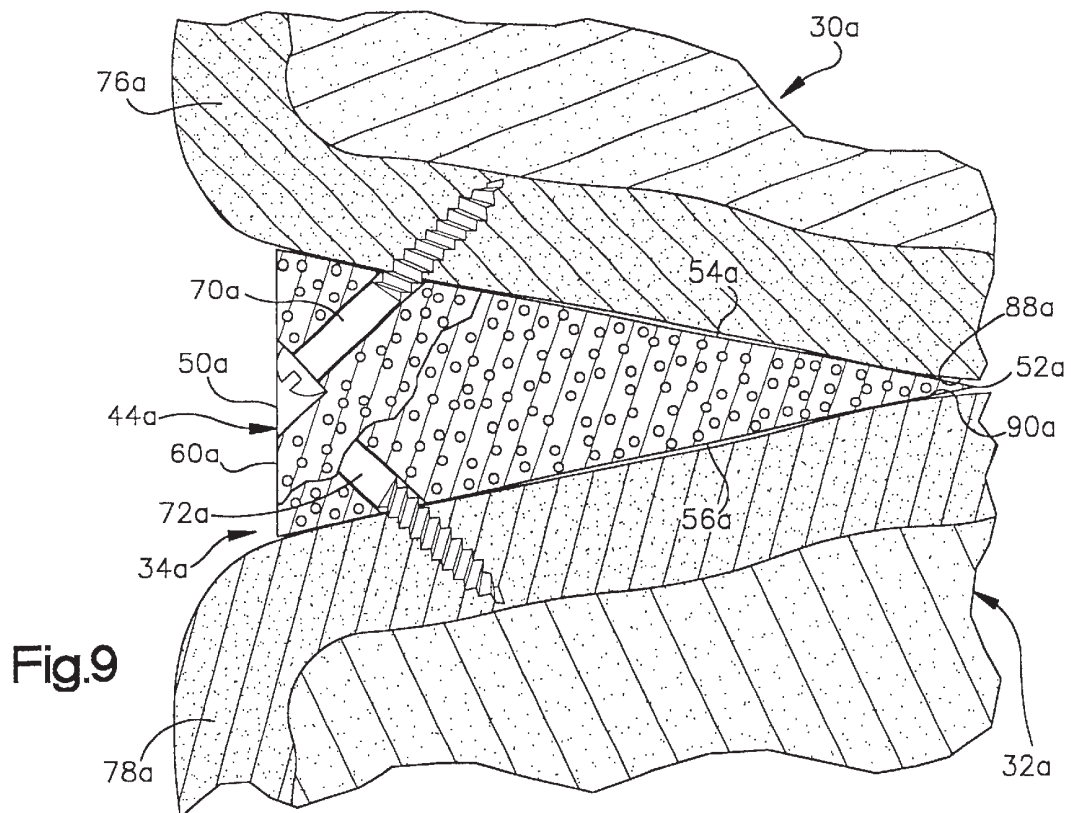
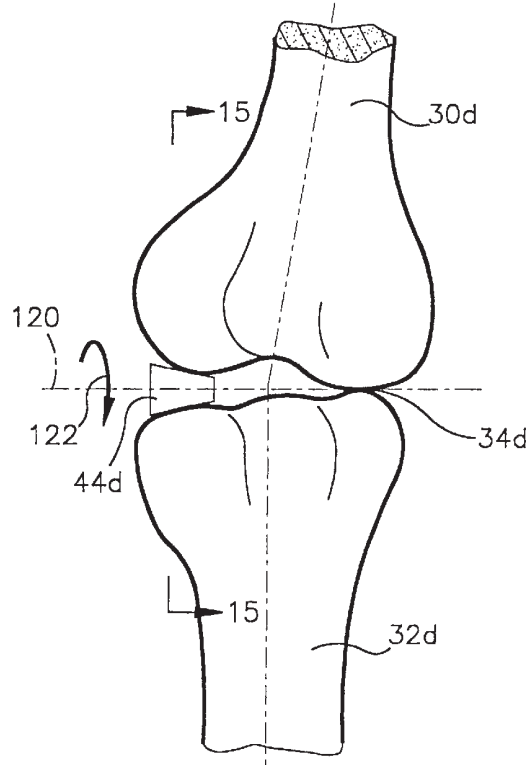
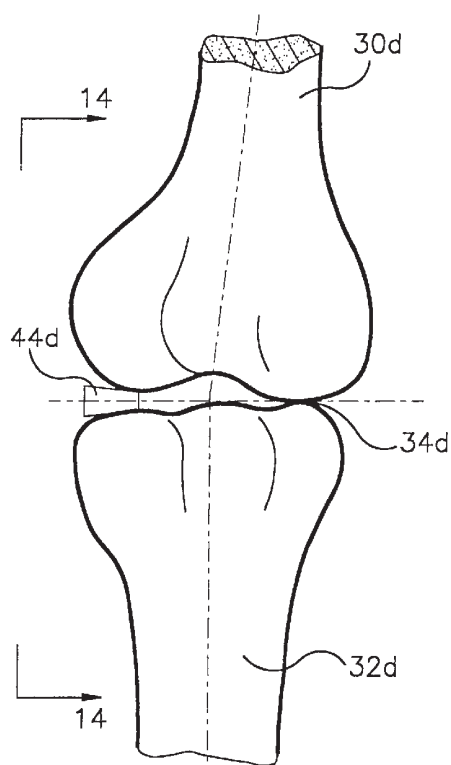
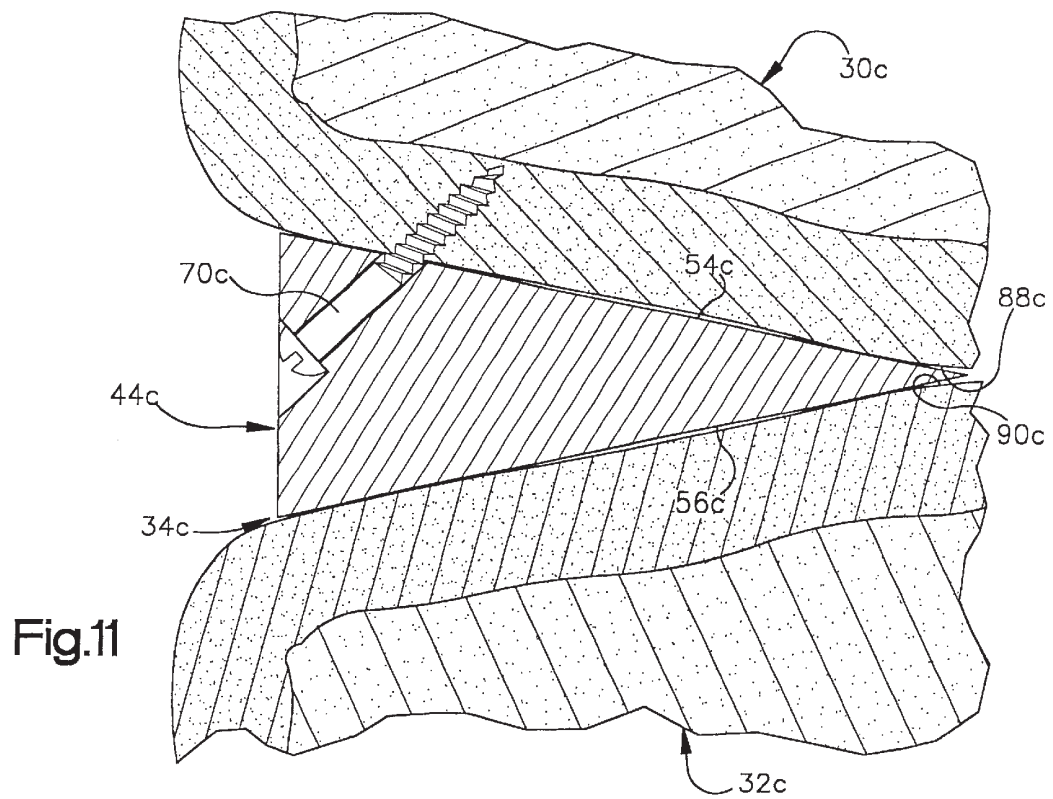
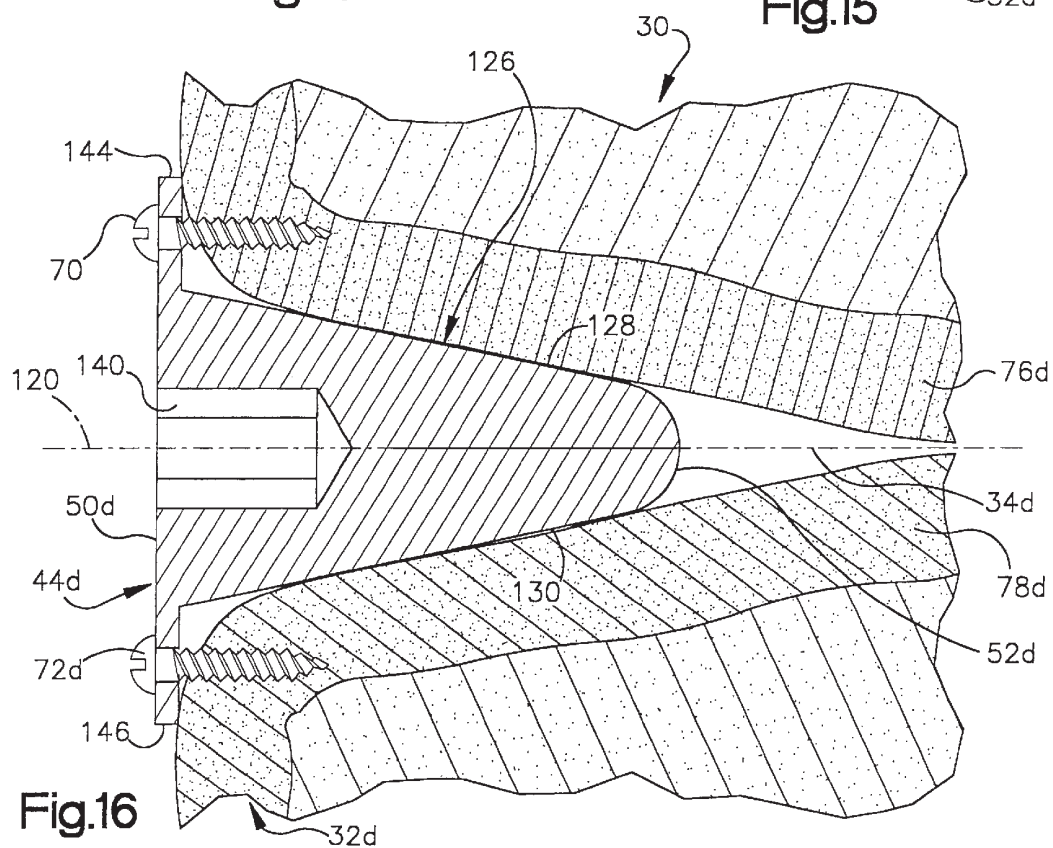
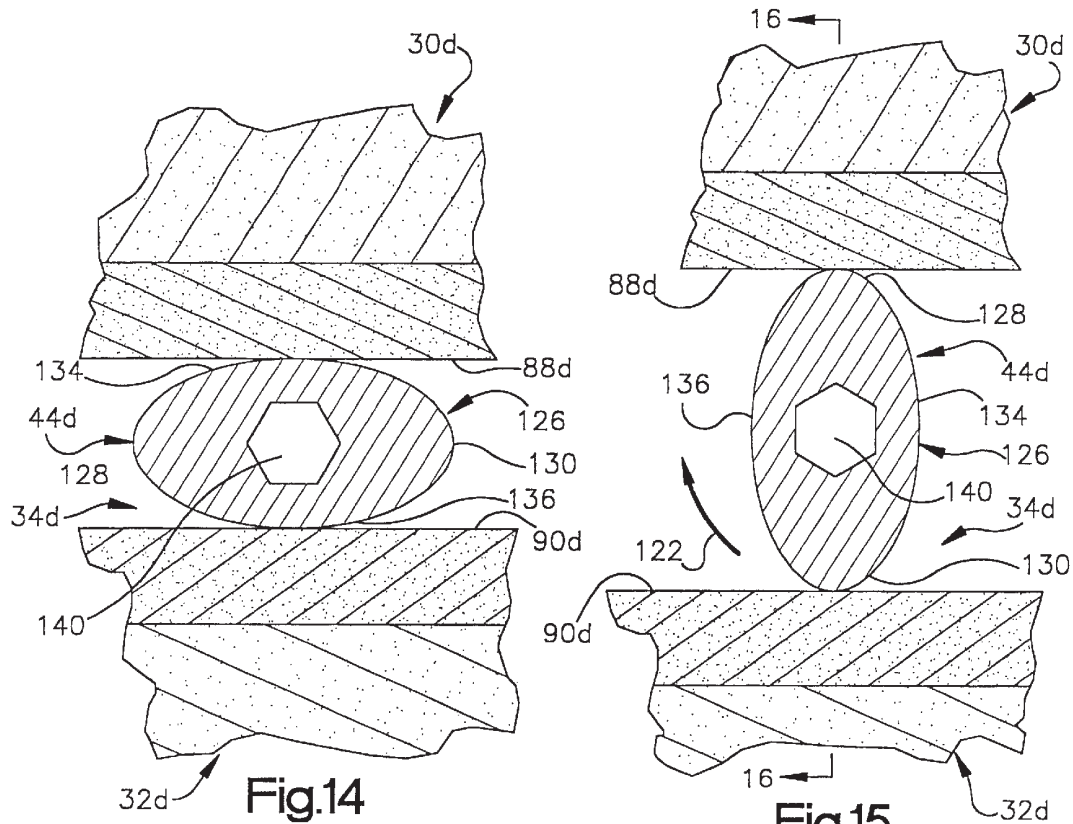
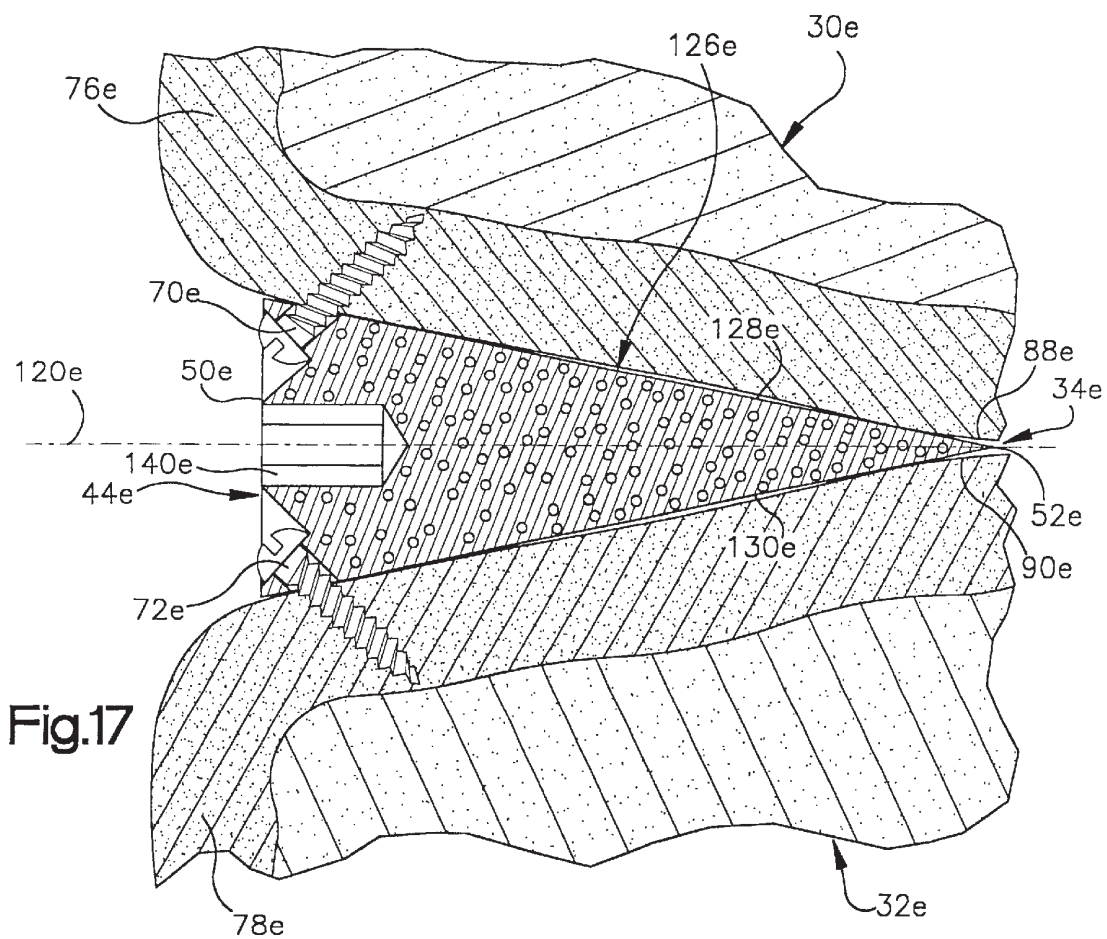


Fig.8









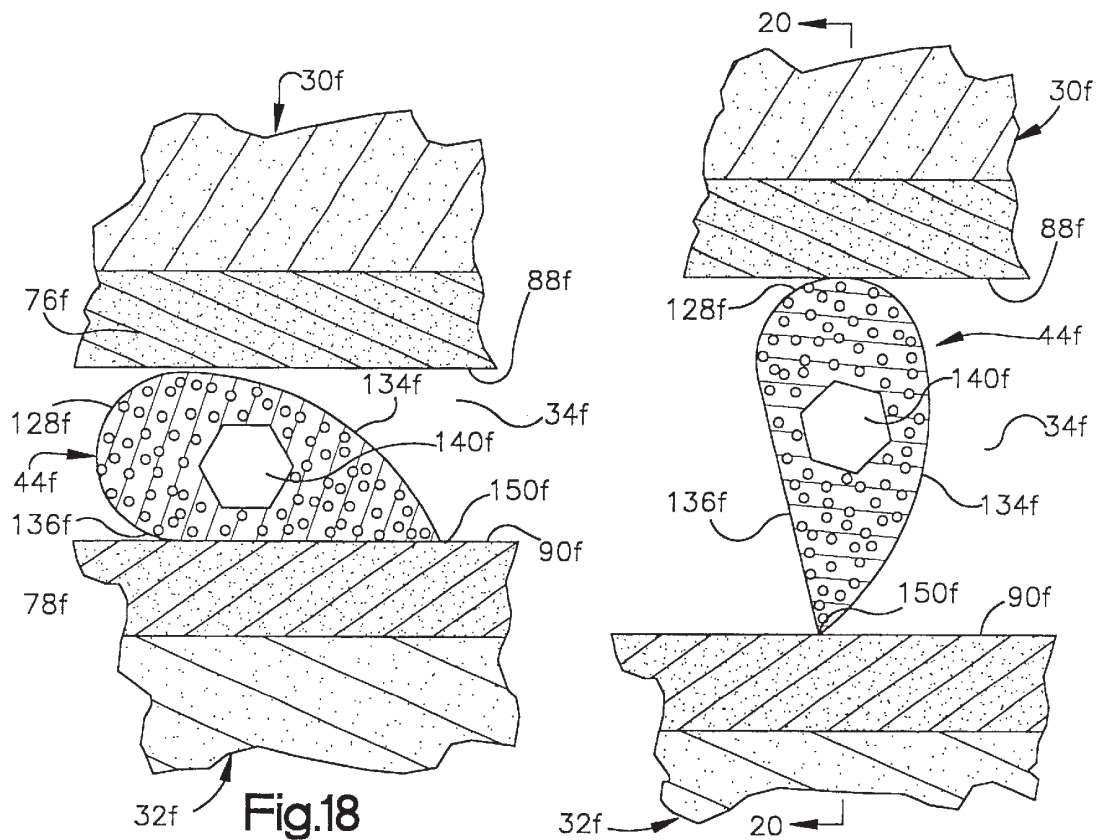


Fig.18

Fig.19

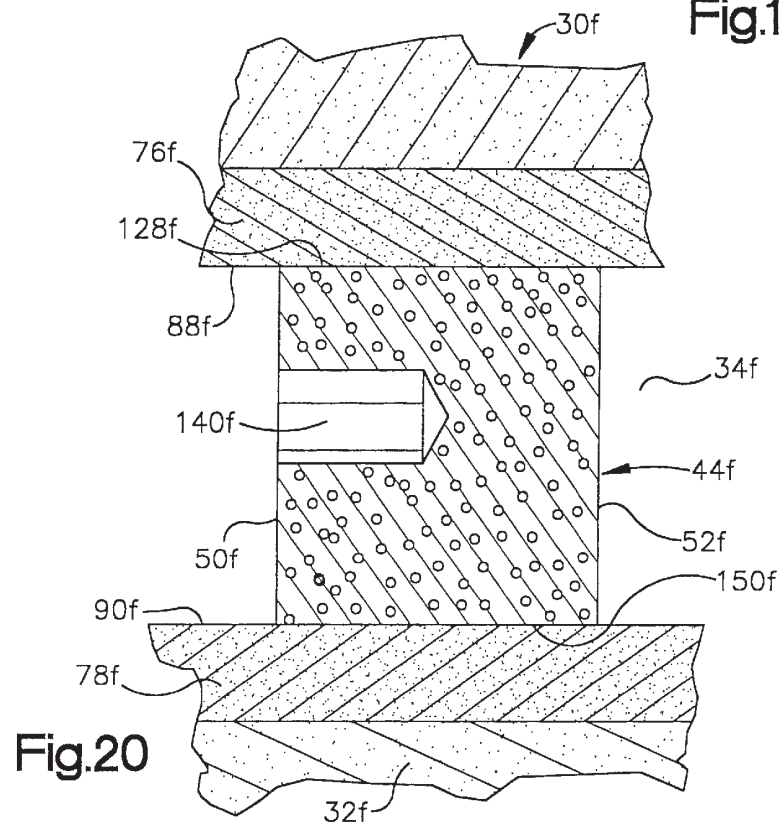


Fig.20

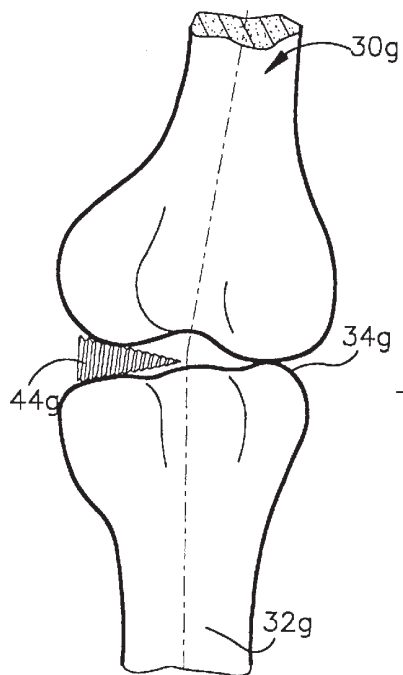


Fig.21

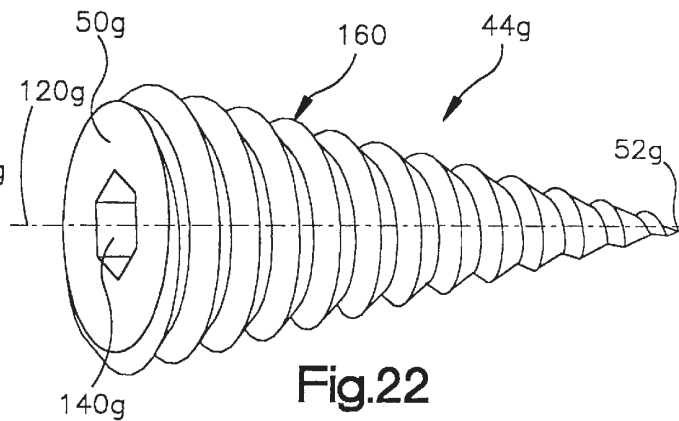


Fig.22

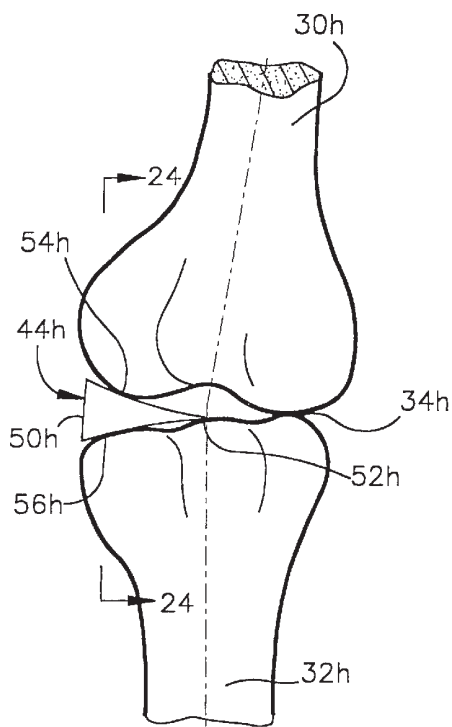


Fig.23

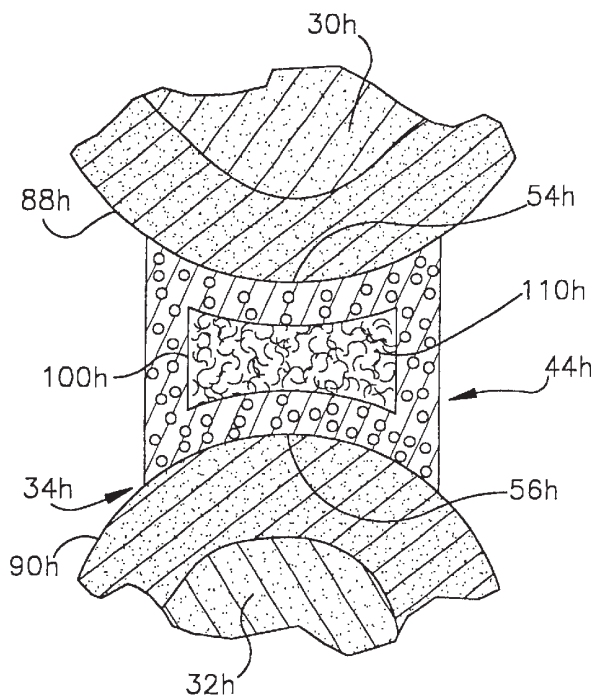


Fig.24

1

CHANGING RELATIONSHIP BETWEEN BONES

This application is a continuation of co-pending U.S. patent application Ser. No. 09/137,443, filed Aug. 20, 1998 now U.S. Pat. 6,099,531.

BACKGROUND OF THE INVENTION

The present invention relates to a new and improved method of changing a spatial relationship between bones which are interconnected at a joint in a patient's body.

It has previously been suggested that joints between bones be fused, that is, surgically immobilized, to promote patient comfort. Thus, U.S. Pat. No. 5,026,373 suggests that a fusion cage be positioned between adjacent vertebrae. Perforations are formed in the cage. The cage is packed with a bone-inducing substance. A method for immobilizing vertebrae is also disclosed in U.S. Pat. No. 5,015,255.

It has previously been suggested that the spatial relationship between portions of a bone in a patient's body be changed to correct deformities. This may be done by removing a wedge-shaped piece of bone in the manner disclosed in U.S. Pat. No. 5,601,565.

Another method of changing the spatial relationship between portions of a bone in a patient's body includes forming a slot in the bone. A forked wedge tool is inserted into the slot. A plate is then placed in a central opening in the forked wedge tool and positioned against the bone. The plate is secured to the bone. The forked wedge tool is then removed from the opening. This method of changing the spatial relationship between portions of a bone in a patient's body is disclosed in U.S. Pat. No. 5,620,448.

A method and apparatus for use in changing a spatial relationship between portions of a bone in a patient's body is also disclosed in co-pending U.S. patent application Ser. No. 09/109,126, filed Jun. 30, 1998 by Peter M. Bonutti and entitled Method And Apparatus For Use In Operating On A Bone. This application discloses the use of a wedge member to expand a slot formed in a bone. The wedge member is porous and may be coated with and/or contain bone growth promoting material. The wedge member may have a configuration which corresponds to a configuration of a portion of the bone which is engaged by the wedge member.

Alternatively, the wedge member disclosed in the aforementioned application Ser. No. 09/109,126 may have a circular cross sectional configuration with an external thread convolution to enable the wedge member to be moved into an opening in a bone by rotating the wedge member.

SUMMARY OF THE INVENTION

A new and improved method and apparatus is provided to change a spatial relationship between bones which are interconnected at a joint in a patient's body. When this is to be done, an opening is formed in a portion the patient's body to expose the joint interconnecting the bones. One of the bones is moved relative to the other by expanding at least a portion of the joint with a wedge member. The wedge member is moved into the joint and applies force against the bones. The opening is closed with the wedge member still disposed in the joint between the bones. Force is then transmitted between the bones through the wedge member to maintain the joint in an expanded condition.

If the joint is to be flexed after being expanded by the wedge member, the wedge member may be connected with only one of the bones. Alternatively, if the joint is to be,

2

immobilized (fused) after inserting the wedge member, the wedge member may be fixedly connected with the bones interconnected at the joint. The wedge member may be porous and may be coated with and/or contain bone growth promoting material.

One embodiment of the wedge member has major side surfaces extending between thick and thin end portions of the wedge member. The wedge member is moved into the joint with the thin end portion leading. As the wedge member is moved into the joint, the thick trailing end portion of the wedge member expands the joint.

In another embodiment of the invention, the wedge member is rotated relative to the joint to expand the joint. The wedge member may have a circular cross sectional configuration and an external thread convolution which extends from a thin leading end of the wedge member to a thick trailing end of the wedge member. The wedge member is pressed into the joint and rotated to cause the wedge member to expand the joint.

In another embodiment of the invention, the wedge member has surface areas which are relatively close together and other surface areas which are relatively far apart. The wedge member is moved into the joint with the surface areas which are close together engaging the adjacent bones. The wedge member is then rotated to apply force against the adjacent bones to expand the joint. The wedge member may be rotated about its central axis to apply forced against the bones and expand the joint.

Alternatively, the wedge member may be rotated about a location where the wedge member engages one of the bones.

Regardless of which embodiment of the wedge member is selected, the wedge member may be used with any one of the many different bones and joints in a patient's body. The wedge member may be utilized at joints in a patient's wrist, ankle, hand, foot, back or other portions of the patient's body. The wedge member may be particularly advantageous when a joint between vertebrae in patient's back is to be immobilized. One or more wedge members may be used to expand a joint and transmit force between bones.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features of the present invention will become more apparent from the following description taken in connection with the accompanying drawings wherein:

FIG. 1 is a schematic illustration depicting the spatial relationship between bones at a joint in a patient's body;

FIG. 2 is a schematic illustration depicting the manner in which a wedge member is inserted into the joint between the bones of FIG. 1 to expand a portion of the joint and change the spatial relationship between the bones;

FIG. 3 is a schematic illustration of another embodiment of the invention in which the joint of FIG. 1 is flexed after the wedge member has been inserted into the joint and connected with only one of the bones;

FIG. 4 is a schematic illustration depicting an alternative manner of inserting the wedge member into the joint between the bones of FIG. 1;

FIG. 5 is a schematic pictorial illustration of the wedge member of FIGS. 2 and 3;

FIG. 6 is a plan view further illustrating the construction of the wedge member of FIG. 5;

FIG. 7 is a side view, taken generally along the line 7—7 of FIG. 6, of the wedge member of FIG. 5;

FIG. 8 is an enlarged fragmentary schematic sectional view depicting the manner in which the wedge member of FIGS. 5—7 is positioned, as shown in FIG. 2, in a joint between ones;

3

FIG. 9 is a fragmentary schematic sectional view, generally similar to FIG. 8, but on a reduced scale, illustrating an embodiment of the invention in which the wedge member is porous;

FIG. 10 is a fragmentary schematic sectional view, generally similar to FIG. 9, illustrating an embodiment of the wedge member which is porous and has a chamber which holds bone growth promoting material;

FIG. 11 is a fragmentary schematic sectional view, generally similar to FIGS. 8–10, illustrating the manner in which the wedge member of FIG. 3 is connected with only one bone to enable the joint between bones to be flexed;

FIG. 12 is a schematic illustration depicting the manner in which a rotatable wedge member is moved into a joint between bones;

FIG. 13 is a schematic illustration depicting the wedge member of FIG. 12 after the wedge member has been rotated to expand a portion of the joint between the bones;

FIG. 14 is an enlarged fragmentary schematic sectional view, taken generally along the line 14–14 of FIG. 12, illustrating the relationship of the rotatable wedge member to the bones prior to rotation of the wedge member;

FIG. 15 is an enlarged fragmentary schematic sectional view, taken generally along the line 15–15 of FIG. 13, illustrating the relationship of the rotatable wedge member of FIG. 14 to the bones after rotation of the wedge member;

FIG. 16 is a fragmentary schematic sectional view, taken generally along the line 16–16 of FIG. 15, illustrating the manner in which the rotatable wedge member is connected with the bones;

FIG. 17 is a fragmentary schematic sectional view, generally similar to FIG. 16, illustrating an embodiment of the rotatable wedge member which is porous;

FIG. 18 is a fragmentary sectional view, generally similar to FIG. 14, illustrating the relationship between the bones at a joint when another embodiment of the rotatable wedge member is in the initial orientation illustrated in FIG. 12 relative to the bones;

FIG. 19 is a fragmentary schematic sectional view, generally similar to FIG. 15, illustrating the relationship of the rotatable wedge member of FIG. 18 to the bones after the wedge member has been rotated;

FIG. 20 is a fragmentary schematic sectional view, taken generally along the line 20–20 of FIG. 19, further illustrating the construction of the rotatable wedge member;

FIG. 21 is a schematic illustration, generally similar to FIG. 2, depicting the manner in which another embodiment of the rotatable wedge member is moved into a joint between bones in a patient's body;

FIG. 22 is an enlarged schematic pictorial illustration of the rotatable wedge member of FIG. 21;

FIG. 23 is a fragmentary schematic illustration, generally similar to FIG. 2, depicting the manner in which another embodiment of the wedge member is moved into a joint between bones in a patient's body; and

FIG. 24 is an enlarged fragmentary schematic sectional view, taken generally along the line 24–24 of FIG. 23, further illustrating the relationship of the wedge member to the bones.

DESCRIPTION OF SPECIFIC PREFERRED EMBODIMENTS OF THE INVENTION

General Description

An upper or first bone 30 in a patient's body is illustrated schematically in FIG. 1. A lower or second bone 32 is

4

connected with the upper bone 30 at a joint 34. The bones 30 and 32 and joint 34 have been illustrated schematically to represent any one of many bones and joints in a patient's body. Thus, the bones 30 and 32 and joint 34 may be disposed in a patient's hand, foot, back, or other portion of the patient's body. It should be understood that the bones 30 and 32 and joint 34 have been illustrated schematically in FIG. 1 as being representative of any one of the many joints in a human patient's body and it is not intended to limit the present invention to any particular joint.

In order to correct deformities, improve patient comfort or other reasons, it may be desired to change the spatial relationship between the upper and lower bones 30 and 32. Thus, it may be desired to change the angular relationship between longitudinal central axes 38 and 40 from the relationship illustrated schematically in FIG. 1 to the relationship illustrated schematically in FIG. 2.

In order to change the spatial relationship between the longitudinal central axes 38 and 40 of the bones 30 and 32, an opening is formed in a portion of the patient's body to expose the joint 34. A wedge member 44 (FIG. 2) is moved into the exposed joint 34 between the bones 30 and 32. The wedge member 44 applies force against the outer side surfaces of the bones 30 and 32 at the joint 34 to expand a portion of the joint.

As the wedge member 44 is moved into the joint 34, in the manner illustrated schematically in FIG. 2, the lower bone 32 is pivoted relative to the upper bone 30 about an axis extending through the joint 34. This changes the angular orientation of the lower bone 32 relative to the upper bone 30. Thus, the spatial relationship between the upper and lower bones 30 and 32 is changed from the spatial relationship illustrated in FIG. 1 to the spatial relationship illustrated in FIG. 2 by the wedge member 44.

In FIG. 2, the wedge member 44 has been illustrated schematically as having an extent which corresponds to approximately one-half of the extent of the joint 34. However, it is contemplated that the wedge member 44 could have an extent which is either smaller than or greater than the extent illustrated in FIG. 2. Thus, the distance between the thick and thin end portions of the tapered wedge member 44 may be less than one-half of the width of the joint 34. Similarly, the distance between the thin leading end portion and thick trailing end portion of the wedge member 44 may be greater than one-half of the width of the joint 34.

The wedge member 44 may be relatively narrow, as measured along the thin end portion of the wedge member. This would enable a plurality of narrow wedge members 44 to be used to expand a single joint 34. If the wedge member 44 is relatively wide, only a single wedge member may be required to expand a joint 34, as shown in FIG. 2.

In the embodiment of the invention illustrated in FIG. 2, the joint 34 is fused after the joint has been expanded by the wedge member 44 to change the spatial relationship between the bones 30 and 32. Thus, after the joint 34 has been expanded by the wedge member 34, the joint is immobilized with the upper and lower bones 30 and 32 in the spatial relationship illustrated in FIG. 2. When the wedge member 44 is utilized in association with joints between vertebrae in a patient's back, it is believed that it may be particularly advantageous to immobilize the joint 34.

Immobilization of the joint 34 may be accomplished by connecting the wedge member 44 with both the upper bone 30 and the lower bone 32. Immobilization of the joint 34 may also be accomplished by the growth of bone and/or other body tissue between the two bones 30 and 32 at the

5

joint 34. Known bone growth promoting materials may be provided at the joint 34 if desired. The bone growth promoting materials may include bone morphogenic proteins and/or other osteoinductive materials.

In the embodiment of the invention illustrated in FIG. 3, the joint 34 is capable of being flexed after the wedge member 44 has been utilized to expand a portion of the joint. Thus, once the wedge member 44 has been inserted into the joint 34, in the manner illustrated in FIG. 2, the patient may flex the joint under the influence of force transmitted to the bones 32 and 30 from muscle tissue in the patient's body.

When the joint 34 is flexed, as illustrated schematically in FIG. 3, the bone 32 moves away from the wedge member 44. The wedge member 44 is fixedly connected to only the bone 30. This allows the bone 32 to move away from the wedge member. It is believed that it will be particularly advantageous to enable the joint 34 to be flexed when the wedge member is utilized to correct deformities occurring in hands, feet, wrists or ankles of a patient. However, it should be understood that the wedge member could be attached to a single bone at any joint in a patient's body which is to be flexed after the wedge member has been used to expand the joint.

In the embodiment of the invention illustrated in FIGS. 1-3, the wedge member 44 has been shown as being moved into the joint 34 in a direction which is perpendicular to an axis about which the joint is flexed. Thus, the wedge member 44 is moved into the joint 34 (FIG. 2) in a direction perpendicular to the axis about which the joint 34 is schematically illustrated in FIG. 3 as being flexed.

In the embodiment of the invention illustrated in FIG. 4, the wedge member 44 is inserted into the joint 34 in a direction parallel to the axis about which the joint is normally flexed. Thus, the wedge member 44 is illustrated in FIG. 4 as being inserted into the joint 34 in a direction perpendicular to the plane of the drawing of the joint 34 in FIGS. 1 and 3. It should be understood that the wedge member 44 could be inserted into a joint, such as the joint 34, in any desired direction in order to obtain a desired expansion of the joint. Thus, the wedge member 44 could be moved into the joint 34 along a path which is neither perpendicular to or parallel to the axis about which the joint is flexed.

After one or more wedge members 44 have been positioned in a joint 34, in the manner previously explained, the opening in the patient's body is closed. When the opening in the patient's body is closed, the wedge member 44 remains in the joint 34 between the bones 30 and 32. The wedge member 44 is formed of a rigid material which is capable of transmitting force between the bones 30 and 32 immediately after being positioned in the joint 34. Therefore, the wedge member 44 is effective to maintain the changed spatial relationship, such as the spatial relationship illustrated in FIG. 2, between the bones 30 and 32 during loading of the joint 34 immediately after positioning of the wedge member in the joint.

Wedge Member

The wedge member 44 (FIGS. 5-7) tapers from a thick end portion 50 to a thin end portion 52. The wedge member 44 has flat upper and lower major side surfaces 54 and 56 (FIG. 7) which slope toward each other from the thick end portion 50 to the thin end portion 52. The major side surfaces 54 and 56 intersect at the thin end portion 52. The pointed thin end portion 52 of the wedge member 44 facilitates moving the wedge member into the joint 34 between the bones 30 and 32 (FIG. 2).

6

In the illustrated embodiment of the wedge member 44 (FIGS. 5-7), the thick end portion 50 has an outer side surface 60 which forms a portion of a cylinder. The thin end portion 52 extends diametrically across the cylinder (FIG. 6).

Therefore, the wedge member 44 has a semi-circular configuration. However, it should be understood that the configuration of the upper and lower major side surfaces 54 and 56 of the wedge member 44 corresponds to the configuration of the joint with which the wedge member is to be associated.

The semi-circular outer side surface 60 will, for many joints at least, have an irregular configuration other than the semi-circular configuration illustrated in FIGS. 5 and 6. This enables the outer side surface 60 to be aligned with the outer side surfaces of the bones 30 and 32 at the joint 34. Since most bones do not have outer side surfaces which form portions of a semi-circular, it is believed that in all probability, the wedge member 44 will have an outer side surface 60 with an irregular configuration rather than the semi-circular configuration illustrated in FIG. 5.

The extent of the thin end portion 52 of the wedge member 44 may be substantially less than shown in FIG. 6. Thus, the extent of the thin end portion 52 of the wedge member 44 may be less than one-half of the extent shown in FIG. 6. This would result in the major side surfaces 54 and 56 of the wedge member 44 having a generally U-shaped configuration. Parallel triangular side surfaces would extend between the outer side surface 50 of the wedge member 44 and opposite ends of the thin end portion 52. These triangular side surfaces would be spaced from opposite sides of the joint 34 when the wedge member 44 is inserted into the joint.

When the wedge member 44 has a relatively narrow, generally U-shaped configuration, a plurality of the wedge members may be inserted into a single joint 34 (FIG. 1).

When a plurality of narrow wedge members 44 are used at one joint 34, the wedge members may have different configurations. Thus, the wedge members 44 may have different lengths and/or different angles between the upper and lower major side surfaces 54 and 56 of the wedge members.

The upper and lower major side surfaces 54 and 56 of the wedge member 44 slope toward each other from the thick end portion 50 to the thin end portion 52 of the wedge member. It is contemplated that a plurality of wedge members 44 having different acute angles between the upper and lower major side surfaces 54 and 56 may be provided. This would enable a surgeon to select the wedge member 44 having a desired thickness at the thick end portion 50. Thus, if a surgeon determines that a joint should be expanded to either a lesser or greater amount than would be accomplished by a wedge member having one angle, the surgeon may select a wedge member having a different angle and thickness to effect the desired expansion of the joint 34. It is also contemplated that a plurality of wedge members 44 having different widths, as measured along the thin end portion 52, may be provided.

The acute angle between the flat upper and lower major side surfaces 54 and 56 is determined by the extent to which the joint 34 is to be expanded, that is, the extent to which the spatial relationship between the bones 30 and 32 is to be changed by insertion of the wedge member 44. Of course, the specific angle provided between the upper and lower major side surfaces 54 and 56 of the wedge member 44 will vary depending upon the size of the joint with which the

wedge member is used and the extent to which the spatial relationship between the bones **30** and **32** is to be changed by use of the wedge member. In addition, the length and width of the wedge member **44** inserted into a particular joint will be determined by the extent to which the joint is to be expanded and the total number of wedge members to be inserted into the joint.

It is believed that it may be desired to have the acute angle between the upper and lower major side surfaces **54** and **56** (FIG. 6) of the wedge member **44** within a range between one and thirty degrees. Although it is difficult to be certain, it is believed that it may be preferred to have the acute angle between the upper and lower major side surfaces **54** and **56** of the wedge member **44** vary within a range of five degrees to twenty degrees. It should be understood that the foregoing specific ranges of sizes for the angle between the upper and lower major side surfaces **54** and **56** of the wedge member **44** have been set forth herein for purposes of clarity of description and it is contemplated that the angle between the upper and lower major side surfaces **54** and **56** may be any one of many angles other than these specific angles.

The size of the wedge member relative to a specific joint **34** may vary depending upon the deformity to be corrected. Thus, a narrow wedge member **44** may have a thin end portion **52** (FIG. 6) with a length which is relatively small compared to the width of a joint. The thin end portion **52** of the narrow wedge member **44** could have a length of less than one fourth the distance across the joint. This would result in opposite ends of the thin end portion **52** being spaced from the periphery of the joint. It is contemplated that a plurality of narrow wedge members **44** could be used to expand a single joint.

The wedge member **44** may be formed of any one of many different known materials which are compatible with a patient's body. For example, the wedge member may be formed of human or animal bone, stainless steel, tantalum, a porous ceramic, or a polymeric material. If desired, the wedge member may be formed of a biodegradable material. However, it is preferred to have the wedge member **44** formed of a rigid material which is capable of enabling force to be transmitted through the joint **34** between the bones **30** and **32** immediately after installation of the wedge member in the joint.

In the embodiment of the invention illustrated in FIG. 2, the joint **34** is immobilized. To facilitate immobilization of the joint **34**, the wedge member **44** is fixedly connected with the bone **30** and with the bone **32**. To facilitate fixedly connecting the wedge member **44** with the bones **30** and **32**, a pair of passages **64** and **66** are formed in the wedge member **44** (FIGS. 6 and 7). When the wedge member **44** is positioned in the joint **34** (FIG. 2), suitable fasteners, that is screws **70** and **72** extend through the passages **64** and **66** into the bones **30** and **32** in the manner indicated schematically in FIG. 8. The screws **70** and **72** engage hard cortical outer layers **76** and **78** of the bones **30** and **32**. If desired, the screws **70** and **72** could extend into the relatively soft cancellous bone **80** and **82**.

Although the wedge member **44** has been illustrated in FIG. 8 as being connected with the bones **30** and **32** by a pair of screws **70** and **72**, it should be understood that the wedge member **44** may be connected with only one of the bones **30** or **32** by only one of the screws **70** or **72** if desired. For example, if the wedge member **44** is connected with the bone **30** by the screw **70**, the joint **34** could be flexed in the manner illustrated schematically in FIG. 3, after the wedge member **44** has been moved into the joint.

Positioning of Wedge Member

When the wedge member **44** is to be inserted in to the joint **34** to change the spatial relationship between the bones **30** and **32** in the manner illustrated schematically in FIG. 2, a location for insertion of the wedge member into the joint **34** is selected by a surgeon. The specific location at which the wedge member **44** is inserted into the joint **34** to expand the joint will be selected by the surgeon as a function of the desired result from a particular operation. In addition, the size of the wedge member **44** will be selected by the surgeon as a function of the joint and the result to be obtained from a particular operation.

The configuration of the wedge member **44** will be selected by the surgeon as a function of the location where the wedge member is to be inserted into the joint **34**. The wedge member **44** may be relatively wide and have a long thin end portion **52**, as shown in FIG. 6, to enable the thin end portion to extend between opposite sides of the joint. Alternatively, the wedge member **44** may be relatively narrow and have a thin end portion **52** which is short. If this is done, the thin end portion **52** would not extend between opposite sides of the joint **34**. A plurality of the narrow wedge members **44** may be inserted into a single joint **34** to expand the joint and transmit force between the bones **30** and **32**.

The surgeon makes an incision in soft body tissue surrounding the joint **34** to expose the joint. Once the joint **34** has been exposed, the thin end portion **52** (FIGS. 5 and 6) of the wedge member **44** is moved into the joint **34**. When the wedge member **44** is to be inserted into a joint in the manner illustrated schematically in FIG. 2, the longitudinal central axis of the thin end portion **52** of the wedge member is aligned with an axis about which the joint pivots. The wedge member is then moved into the joint **34** along a linear path which extends perpendicular to the axis about which the joint pivots. The wedge member **44** is moved into the joint **34** by applying force against the trailing thick end portion **50** of the wedge member.

As the wedge member **44** is moved into the joint **34**, the upper major side surface **54** (FIGS. 5 and 7) of the wedge member slides along an outer side surface **88** (FIG. 8) of the outer layer **76** of hard cortical bone. The lower major side surface **56** of the wedge member **44** slides along an outer side surface **90** of the outer layer **78** of hard cortical bone.

The outer side surfaces **88** and **90** of the bones **30** and **32** are in their naturally occurring conditions. Thus, the outer side surfaces **88** and **90** of the bones **30** and **32** are not cut away to prepare for insertion of the wedge member **44** into the joint **34**. However, it should be understood that under certain circumstances that it may be necessary to abrade or otherwise cut the outer side surfaces **88** and **90** of the outer layers **76** and **78** of hard cortical bone to prepare the joint **34** for insertion of the wedge member **44**.

As the thin leading end portion **52** (FIG. 8) of the wedge member **44** moves into the joint **34**, the upper and lower major side surfaces **54** and **56** apply force against the outer side surfaces **88** and **90** on the bones **30** and **32**. As this occurs, the joint **34** is expanded. As the joint **34** is expanded, the bone **32** is pivoted, relative to the bone **30**, from the initial orientation, shown in FIG. 1, to the improved orientation shown in FIG. 2. As this occurs, the longitudinal central axis **40** of the bone **32** moves relative to the longitudinal central axis **38** of the bone **30**. Therefore, the angular relationship between the bones **30** and **32** is changed by expansion of a portion of the joint **34** by insertion of the wedge member **44** into the joint.

When the wedge member **44** has been pressed the desired distance into the joint **34**, by the application of force against the thick end portion **50** of the wedge member **44**, the outer side surface **60** on the wedge member moves slightly inward of the outer side surfaces on the bones **30** and **32** (FIG. **8**). The outer side surface **60** on the wedge member **44** has a configuration which corresponds to the configurations of the outer side surfaces on the bones **30** and **32** adjacent to the joint **34**. Therefore, the wedge member **44** does not project outward from the joint. This minimizes any tendency of the wedge member to subsequently abrade body tissue adjacent to the joint **34**.

Once the wedge member **44** has been moved into the desired orientation relative to the bones **30** and **32**, as illustrated schematically in FIG. **8**, the wedge member **44** is fixedly connected with the bones **30** and **32** by the screws **70** and **72** to immobilize the joint. The area surrounding and directly adjacent to the wedge member **44** is packed with bone growth promoting material and/or bone chips. The bone growth promoting materials may include bone morphogenic proteins and/or other osteoinductive materials. This promotes fusion of the bones **30** and **32** for remedial immobilization of the joint **34**.

Since the wedge member **44** is rigid, it can immediately transmit loads between the bones **30** and **32**. Therefore, after the incision which exposed the joint **34** has been closed, the patient can begin to load the joint **34**. The wedge member **44** is effective to maintain the joint **34** in an expanded condition during loading of the joint. Therefore, the bones **30** and **32** remain in the improved spatial relationship illustrated in FIG. **2** during loading of the joint **34**.

Wedge Member—Second Embodiment

In the embodiment of the invention illustrated in FIGS. **1–8**, a solid wedge member has been utilized to expand the joint **34**. In the embodiment of the invention illustrated in FIG. **9**, a porous wedge member is utilized to expand a joint. Since the embodiment of the invention illustrated in FIG. **9** is generally similar to the embodiment of the invention illustrated in FIGS. **1–8**, similar numerals will be utilized to designate similar components, the suffix letter “a” being associated with the numerals of FIG. **9** in order to avoid confusion.

A wedge member **44a** is positioned in a joint **34a** between bones **30a** and **32a**. The wedge member **44a** engages outer side surfaces **88a** and **90a** on layers **76a** and **78a** of hard cortical bone. The outer side surfaces **88a** and **90a** are in their naturally occurring conditions.

As the wedge member **44a** is moved into the joint **34a**, flat upper and lower major side surfaces **54a** and **56a** on the wedge member **44a** slide along the outer side surfaces **88a** and **90a** on the bones **30a** and **32a**. The upper and lower major side surfaces **54a** and **56a** of the wedge **44a** apply force against the outer side surfaces **88a** and **90a** of the bones **30a** and **32a** to expand the joint **34a** as the wedge member is moved into the joint. The wedge member **44a** is moved into the joint **34a** under the influence of force applied against an outer side surface **60a** on a trailing thick end portion **50a** of the wedge member **44a**.

Once the joint **34a** has been expanded to change the spatial relationship between the bones **30a** and **32a**, suitable fasteners (screws) **70a** and **72a** are inserted through passages in the wedge member **44a**. The screws **70a** and **72a** engage the hard cortical outer layers **76a** and **78a** of bone to fixedly secure the wedge member **44a** with the bones **30a** and **32a**.

A single wedge member **44a** is used to expand the joint **34a**. However, a plurality of narrow wedge members **44a**

may be inserted into the joint at spaced apart locations about the periphery of the joint if desired.

In accordance with a feature of this embodiment of the invention, the wedge member **44a** is porous so that bone can grow through the wedge member. It is contemplated that the wedge member could be provided with a porous construction by having passages extend through the wedge member between the upper and lower major side surfaces **54a** and **56a** of the wedge member. The open ends of the passages would enable bone to grow through the wedge member **44a**.

In the embodiment of the wedge member **44a** illustrated in FIG. **9**, the wedge member is formed of a rigid open cell material. The open cell material provides cavities in which bone can grow through the wedge member **44a**. Thus, the wedge member **44a** (FIG. **9**) has a cellular construction similar to coral.

It is contemplated that the wedge member **44a** may be coated with a material which promotes the growth of bone. The cells in the wedge member **44a** may be at least partially filled with bone growth promoting material. The bone growth promoting materials may be bone morphogenic proteins and other osteoinductive materials. In addition to bone growth promoting material associated with the wedge member **44a**, the space around and adjacent to the wedge member **44a** in the joint **34a** may be packed with bone growth promoting material and/or bone chips.

The wedge member **44a** is rigid and can be subject to normal loading immediately after being positioned in the joint **34a**. This enables the patient to subject the bones **30a** and **32a** to normal loading without waiting for fusion to occur through and around the wedge member **44a**. Of course, with the passage of time, the growth of bone through the wedge member **44a** and around the wedge member will strengthen the immobilization of the joint **34a**.

In the embodiment of the invention illustrated in FIG. **9**, the passages through the wedge member **44a** are formed by the open cell structure of the wedge member. This results in the passages through the wedge member **44a** having an irregular configuration. If desired, linear passages could be formed in the wedge member **44a**. The linear passages may be drilled, cast, or formed in other ways in the wedge member **44a**.

Hollow Wedge Member

In the embodiment of the invention illustrated in FIGS. **1–8**, the wedge member **44** is formed by a solid piece of material. In the embodiment of the invention illustrated in FIG. **9**, the wedge member **44a** is formed by a continuous piece of porous material. In the embodiment of the invention illustrated in FIG. **10**, the wedge member is formed by a hollow piece of porous material. Since the embodiment of the invention illustrated in FIG. **10** is generally similar to the embodiments of the invention illustrated in FIGS. **1–9**, similar numerals will be utilized to designate similar components, the suffix letter “b” being associated with the numerals of FIG. **10** to avoid confusion.

In the embodiment of the invention illustrated in FIG. **10**, a wedge member **44b** is inserted into a joint **34b** between bones **30b** and **32b** to expand the joint. Expansion of the joint **34b** by the wedge member **44b** changes the spatial relationship between the bones **30b** and **32b**. The wedge member **44b** is held against movement relative to the bones **30b** and **32b** by fasteners (screws) **70b** and **72b**. The fasteners **70b** and **72b** extend through passages in the wedge member **44b** into layers **76b** and **78b** of hard cortical bone on bones **30b**, **32b**. The layers **76b** and **78b** are in their naturally occurring condition.

11

When the wedge member 44b is to be moved into the joint, a thin end portion 52b of the wedge member 44b is pressed into the joint 34b by applying force against an outer side surface 60b at a thick end portion 50b of the wedge member 44b. The force applied against the trailing thick end portion 50b of the wedge member 44b causes flat upper and lower major side surfaces 54b and 56b to slide along outer side surfaces 88b and 90b. As the upper and lower major side surfaces 54b and 56b on the wedge member 44b slide along the outer side surfaces 88b and 90b of the bones 30b and 32b, the wedge member applies force against the bones to expand the joint 34b in the manner previously explained.

In accordance with a feature of this embodiment of the invention, the wedge member 44b (FIG. 10) is hollow. Therefore, a compartment or cavity 100 is formed in the wedge member 44b. The compartment 100 has upper and lower inner side surfaces 102 and 104 which are smaller than the upper and lower major side surfaces 54b and 56b of the wedge member 44b. However, the inner side surfaces 102 and 104 of the compartment 100 have the same general configuration as the upper and lower major side surfaces 54b and 56b of the wedge member 44b.

The compartment 100 is filled with bone growth inducing material 110. The bone growth inducing material 110 is positioned in the compartment 100 through a suitable opening (not shown) formed in either the upper major side surface 54b or the lower major side surface 56b of the wedge member 44b. Once the compartment 100 has been filled with bone growth inducing material 110, the opening to the compartment is closed. However, the wedge member 44b is formed of a porous material which enables bone to grow through the wedge member.

The growth of bone through the wedge member 44b is promoted by the bone growth inducing material 110 in the compartment 100. The bone growth inducing material 110 in the compartment 100 may be any of many known bone morphogenic proteins and osteoinductive materials. For example, apatite compositions with collagen may be utilized. Demineralized bone powder may also be utilized. Regardless of which of the known bone growth inducing materials are selected, the presence of the bone growth promoting material 110 in the compartment 100 will promote a growth of bone through openings in the porous wedge member 44b.

The wedge member 44b may, itself, be formed of a suitable rigid material, such as tantalum, stainless steel, or ceramic materials. In addition to the bone growth inducing material 110, the surfaces of the wedge member 44b and openings in the porous material of the wedge member may be coated with suitable bone growth promoting materials.

The wedge member 44b is porous so that bone can grow through the wedge member. In the embodiment of the invention illustrated in FIG. 10, the wedge member is formed of an open cell material having a construction similar to coral. The open cell material provides irregular passages which extend through the wedge member 44b and enable the bone to grow through the wedge member. However, it should be understood that the wedge member 44b could be formed of a solid material with passages drilled or cast in the wedge member. Regardless of which of the materials the wedge member is formed, it is believed that it will be advantageous to have the material be sufficiently rigid to enable the joint 44b to be load bearing immediately after an operation installing the wedge member in the joint.

Single Connection For Wedge Member

In the embodiments of the invention illustrated in FIGS. 8-10, the wedge members 44, 44a, and 44b are connected

12

with bones on opposite sides of a joint by suitable fasteners (screws). In the embodiment of the invention illustrated in FIG. 11, the wedge member is connected with only one of the bones. Since the embodiment of the invention illustrated in FIG. 11 is generally similar to the embodiments of the invention illustrated in FIGS. 1-10, similar numerals will be utilized to designate similar components, the suffix letter "c" being associated with the numerals of FIG. 11 to avoid confusion.

A wedge member 44c is inserted into a joint 34c between upper and lower bones 30c and 32c. The wedge member 44c has the same general configuration and construction as the wedge member 44 of FIGS. 5-8. However, the wedge member 44c is connected with only one of the bones 30c and 32c. Thus, rather than utilizing a pair of fasteners to secure the wedge member 44c to the upper and lower bones 30c and 32c, only a single fastener 70c is utilized to connect the wedge member 44c with the upper bone 30c. Therefore, installation of the wedge member 44c in the joint 34c does not result in immobilization of the joint.

Since the wedge member 44c is connected with the bone 30c by the fastener 70c, the bone 32c may be moved away from the wedge member during flexing of the joint 34c. This may result in the upper major side surface 54c on the wedge member 54c remaining in engagement with the outer side surface 88c on the bone 30c while the outer side surface 90c on the bone 32c moves away from the lower major side surface 56c on the wedge member 44c. Of course, a single fastener 70c may be utilized to hold the wedge member in the joint 34c where the outer side surfaces 88c and 90c on the upper and lower bones 30c and 32c remain in engagement with the upper and lower major side surfaces 54c and 56c of the wedge member 44c.

In the embodiment of the wedge member 44c illustrated in FIG. 11, the wedge member is formed of a solid material through which bone does not grow. However, it is contemplated that a single fastener, corresponding to the fastener 70c of FIG. 11, may be used to connect a porous wedge member with a bone. Of course, bone may grow through the porous wedge member. The porous wedge member may have the same construction as shown in FIGS. 9 and 10, with the exception of being held in place by only a single fastener 70c.

Rotatable Wedge Member

In the embodiment of the invention illustrated in FIGS. 1-11, the wedge member 44 is moved into the joint 34 between the upper and lower bones 30 and 32 along a linear path. The wedge member 44 is moved into the joint 34 with the thin end portion 52 of the wedge member leading and the thick end portion 50 of the wedge member trailing. The tapered configuration of the wedge member results in the application of force against the upper and lower bones 30 and 32 to expand the joint 34 in the manner previously explained.

In the embodiment of the invention illustrated in FIGS. 12-16, the wedge member is moved into the joint between the upper and lower bones and then rotated. During initial movement of the wedge member into the joint between the bones, there may be some expansion of the joint. During rotation of the wedge member in the joint, there is further expansion of the joint. Since the embodiment of the invention illustrated in FIGS. 12-15 is generally similar to the embodiments of the invention illustrated in FIGS. 1-11, similar numerals will be utilized to designate similar components, the suffix letter "d" being associated with the numerals of FIGS. 12-15 to avoid confusion.

13

Upper and lower bones **30d** and **32d** are interconnected at a joint **34d** (FIG. 12). Prior to insertion of a wedge member **44d**, the upper and lower bones **30d** and **32d** are in the same spatial orientation relative to each other as is illustrated in FIG. 1. Upon insertion of the wedge member **44d** into the joint **34d**, in the manner illustrated in FIG. 12, there may be a slight expansion of the joint **34d** and a slight change in the orientation of the upper bone **30d** relative to the lower bone **32d**. There is a relatively small change in the spatial relationship between the upper bone **30d** and the lower bone **32d** because the wedge member **44d** is inserted into the joint **34d** in an orientation in which the wedge member **44d** is relatively thin as viewed in FIG. 12, that is, in a direction transverse to the joint **34d**.

After the wedge member **44d** has been inserted into the joint **34d** in the manner indicated schematically in FIG. 12, the wedge member **44d** is rotated, through less than one revolution, about an axis **120** in the manner indicated schematically by an arrow **122** in FIG. 13. As the wedge member **44d** is rotated through approximately ninety degrees about the axis **120**, the wedge member applies force against the upper and lower bones **30d** and **32d** to expand the joint **34d**. As the joint **34d** is expanded by rotation of the wedge member **44d**, the spatial relationship between the upper and lower bones **30d** and **32d** changes from the spatial relationship illustrated schematically in FIG. 12 to the spatial relationship illustrated schematically in FIG. 13. Thus, by the combined effect of insertion of the wedge member **44d** into the joint **34d** and rotation of the wedge member in the joint, the spatial relationship of the upper and lower bones **30d** and **32d** was changed from the spatial relationship illustrated in FIG. 1 for the bones **30** and **32** to the spatial relationship illustrated in FIG. 13 for the upper and lower bones **30d** and **32d**.

The bones **30d** and **32d** illustrated schematically in FIGS. 12 and 13 should be considered as being representative of bones at many different locations in a patient's body. Thus, the bones **30d** and **32d** may be any of the many bones in a patient's wrist, ankle, hand, foot, back, or other portion of a patient's body. The bones **30d** and **32d** may be vertebrae in a patient's back. It should be understood that the wedge member **44d** may be used with any one of the many different types of joints in a patient's body.

The wedge member **44d** has a generally oval, cross-sectional configuration (FIGS. 14 and 15), as viewed in a plane perpendicular to a longitudinal central axis of the wedge member. Thus, the wedge member **44d** has an outer side surface **126** (FIG. 14) with a pair of arcuate nose portions **128** and **130**. The arcuate nose portions **128** and **130** of the outer side surface **126** are interconnected by a pair of arcuate side portions **134** and **136**.

The arcuate outer side surface **126** tapers from a thick end portion **50d** (FIG. 16) to a thin end portion **52d**. In the illustrated embodiment of the wedge member **44d**, the thin end portion **52d** is blunt or truncated. Thus, the thin end portion **52d** of the wedge member **44d** does not come to a sharp point as does the thin end portions of the wedge members **44**, **44a**, **44b** and **44c**.

It should be understood that the wedge members **44a**, **44b** and **44c** (FIGS. 5-11) could be constructed with a blunt thin end portion corresponding to the blunt thin end portion **52d** (FIG. 16) on the wedge member **44d** if desired. However, it is believed that by having the thin end portion of the wedge members of FIGS. 5-11 taper to a sharp point, insertion of the wedge members into a joint is facilitated. Similarly, if desired, the wedge member **44d** could be provided with a

14

thin end portion **52d** (FIG. 16) which comes to a sharp point in the same manner as the wedge members **44**, **44a**, **44b** and **44c**.

When the wedge member **44d** is inserted into the joint **34d** (FIG. 14), the arcuate side portion **134** engages the outer side surface **88d** of the upper bone **30d** and the arcuate side portion **136** engages the outer side surface **90d** of the lower bone **32d**. The arcuate side portions **134** and **136** are relatively close together so that minimal expansion of the joint **34d** occurs when the wedge member **44d** is inserted into the joint. As the wedge member **44d** is inserted into the joint **34d**, the arcuate side portions **134** and **136** slide along and are effective to apply force against the outer side surfaces **88d** and **90d** of the upper and lower bones **30d** and **32d** to effect some expansion of the joint **34d**. The outer side surfaces **88d** and **90d** of the bones **30d** and **32d** are in their naturally occurring conditions.

After the wedge member **44d** has been inserted into the joint **34d**, in the manner shown in FIGS. 12 and 14, a suitable tool is inserted into a hexagonal socket **140** (FIG. 14) in the wedge member **44d**. Torque is transmitted from the tool to the wedge member **44d** to rotate the wedge member through less than one revolution in the direction indicated by the arrow **122** in FIGS. 13 and 15. This results in the wedge member **44d** being rotated through approximately ninety degrees in a clockwise direction from the position shown in FIG. 14 to the position shown in FIG. 15. As the wedge member **44d** is rotated, the wedge member applies force against the upper and lower bones **30d** and **32d** and expands the joint **34d**.

Upon initiation of rotation of the wedge member **44d** from the position shown in FIG. 14 toward the position shown in FIG. 15, the arcuate side portions **134** and **136** slide along the outer side surfaces **88d** and **90d** on the bones. As the rotation of the wedge member **44d** continues, the arcuate nose portions **128** and **130** of the wedge member **44d** approach the outer side surfaces **88d** and **90d** of the upper and lower bones **30d** and **32d**. As this is occurring, the joint **34d** is expanded by the force applied against the upper and lower bones **30d** and **32d** by the wedge member **44d**. When the wedge member **44d** reaches the position shown in FIG. 15, the arcuate nose portions **128** and **130** engage the outer side surfaces **88d** and **90d** on the upper and lower bones **30d** and **32d** to hold the joint **34d** in the expanded condition illustrated in FIGS. 15 and 16.

A pair of mounting tabs **144** and **146** (FIG. 16) are integrally formed with the wedge member **44d**. The mounting tabs **144** and **146** project outwardly from the end portion **50d** of the wedge member **44d**. The mounting tabs **144** and **146** are aligned with the arcuate nose portions **128** and **130** of the outer side surface **126** on the wedge member **44d**. Therefore, the mounting tabs **144** and **146** are disposed adjacent to the bones **30d** and **32d** in the manner illustrated schematically in FIG. 16.

A pair of retaining screws **70d** and **72d** extend through the mounting tabs **144** and **146** into the outer layers **76d** and **78d** of hard cancellous bone on the upper and lower bones **30d** and **32d**. The mounting screws or fasteners **70d** and **72d** are effective to hold the wedge member **44d** against rotation relative to the upper and lower bones **30d** and **32d**. Bone growth promoting material and/or bone chips may be packed in the joint **34d** around the wedge member **44d**. The wedge member **44d** is rigid and can transmit force between the bones **30d** and **32d** as soon as it is rotated to the position shown in FIGS. 15 and 16.

As is perhaps best seen in FIG. 15, the wedge member **44d** is narrower than the distance across the joint **34d**. Therefore,

15

a plurality of wedge members **44d** may be utilized to hold the joint **34d** in the expanded condition of FIGS. **15** and **16**. The plurality of wedge members **44d** could be positioned in the joint **34d** with their rotational axes **120** (FIG. **16**) in a parallel relationship or with their rotational axes **120** skewed relative to each other. If a plurality of wedge members **44d** are utilized, they could be of different sizes or have different angles of taper along the axis **120**.

It should be understood that the wedge members **44**, **44a**, **44b** and **44c** of FIGS. **5–11** could also be relatively narrow. A plurality of wedge members of FIGS. **5–11** could be positioned in a joint with their longitudinal axes either parallel or skewed relative to each other.

Porous Rotatable Wedge Member

In the embodiment of the invention illustrated in FIGS. **12–16**, the wedge member **44d** is formed as a solid body of rigid material, such as stainless steel. The wedge member in the embodiment of the invention illustrated in FIG. **17** is formed of a rigid porous material. Since the embodiment of the invention illustrated in FIG. **17** is generally similar to the embodiments of the invention illustrated in FIGS. **1–16**, similar numerals will be utilized to designate similar components, the suffix letter “e” being associated with the numerals of FIG. **17** to avoid confusion.

The wedge member **44e** is disposed in a joint **34e** between upper and lower bones **30e** and **32e**. The wedge member **44e** applies force against the outer side surfaces **88e** and **90e** of the upper and lower bones **30e** and **32e** to expand the joint **34e** and change the orientation of the upper and lower bones relative to each other. In the embodiment of the invention illustrated in FIG. **17**, the wedge member **44e** tapers from a thick end portion **50e** to a thin end portion **52e**. In the illustrated embodiment of the invention, the thin end portion **52e** of the wedge member **44e** has a pointed configuration rather than the blunt configuration of the wedge member **44d** of FIG. **16**. However, the wedge member **44e** could have the same configuration as the wedge member **44d** if desired.

The wedge member **44e** (FIG. **17**) has an oval cross sectional configuration, as viewed on a plane extending perpendicular to a central axis **120e** of the wedge member **44e**. Thus, the wedge member **44e** has an outer side surface **126e** with arcuate nose portions **128e** and **130e**. The arcuate nose portions **128e** and **130e** are interconnected by arcuate side portions corresponding to the arcuate side portions **134** and **136** of the wedge member **44d** (FIGS. **14** and **15**). A socket **140e** (FIG. **17**) is provided in the wedge member **44e** to facilitate the application of torque to the wedge member.

In accordance with a feature of the embodiment of the invention illustrated in FIG. **17**, the wedge member **44e** is formed of a rigid porous material having an open cell construction. The porous open cell construction of the wedge member **44e** enables bone to grow through the wedge member. The wedge member **44e** may have an open cell construction similar to the construction of coral.

The wedge member **44e** may be coated with bone growth promoting materials to promote the growth of bone through the wedge member. The open cells in the porous wedge member **44e** could be at least partially filled with the bone growth promoting material. In addition, bone growth materials and/or bone chips may be packed in the joint **34e** around the wedge member **44e**. The bone growth promoting materials may include bone morphogenic proteins and/or other osteoinductive materials.

A pair of fasteners **70e** and **72e** are provided to connect the wedge member **44e** with the upper and lower bones **30e**

16

and **32e**. Thus, the fasteners **70e** extends into the outer layer **76e** of hard cortical bone on the upper bone **30e**. Similarly, the fastener **72e** extends into the outer layer **78e** of hard cortical bone on the lower bone **32e**. In the illustrated embodiment of the invention, the fasteners **70e** and **72e** extend through passages in the wedge member **44e** into the upper and lower bones **30e** and **32e**. However, if desired, the wedge member **44e** could be provided with mounting tabs, similar to the mounting tabs **144** and **146** of FIG. **16**.

When the wedge member **44e** is to be used to change the spatial relationship between the upper and lower bones **30e** and **32e**, the wedge member is inserted into the joint **34e** with the arcuate nose portions **128e** and **130e** of the wedge member spaced from the outer side surfaces **88e** and **90e** on the upper and lower bones **30e** and **32e**. At this time, the wedge member **44e** is in the same orientation as is illustrated in FIG. **14** for the wedge member **44d**. Arcuate side portions of the arcuate outer side surface **126e** on the wedge member **44e** engage the outer side surfaces **88e** and **90e** on the upper and lower bones **30e** and **32e** in the same manner as is illustrated for the wedge member **44d** in FIG. **14**.

Although inserting the wedge member **44e** into the joint **32e** may effect an initial, relatively small expansion of the joint, the majority of the expansion of the joint **34e** is obtained by rotating the wedge member **44e** about its central axis **120e**. To rotate the wedge member **44e** about its central axis **120e**, a suitable tool is inserted into the socket **140e**. Force is transmitted from the tool to the wedge member **44e** to rotate the wedge member. As the wedge member is rotated relative to the upper and lower bones **30e** and **32e**, the wedge member further expands the joint **34e** and effects further change in the spatial relationship between the upper and lower bones **30e** and **32e**.

Once the wedge member **44e** has been moved to the position illustrated in FIG. **17**, that is, to a position corresponding to the position of the wedge member **44d** in FIG. **15**, the wedge member is connected to the upper and lower bones **30e** and **32e**. To connect the wedge member with the upper and lower bones **30e** and **32e**, the screws **70e** and **72e** are inserted through passages in the wedge member into the bone. Bone growth promoting material and/or bone chips may be packed in the joint **34e** around the wedge member **44e**.

Although a single wedge member **44e** is utilized to expand the joint **34e**, a plurality of wedge members could be utilized if desired. When a plurality of wedge members **34e** are held to expand the joint **34e**, the wedge members may all be of the same size and configuration or may have different sizes and configurations.

Rotatable Wedge Member Alternative— Embodiment

The wedge members **44d** and **44e** are rotated about their central axes **102d** and **120e** (FIGS. **16** and **17**) to effect expansion of the joints **34d** and **34e**. In the embodiment of the invention illustrated in FIGS. **18** through **20**, the wedge member is rotated about a location where the wedge member engages one of the bones. Since the embodiment of the invention illustrated in FIGS. **18–20** is generally similar to the embodiments of the invention illustrated in FIGS. **1–17**, similar numerals will be utilized to designate similar components, the suffix letter “f” being associated with the numerals of FIGS. **18–20** to avoid confusion.

Upper and lower bones **30f** and **32f** are interconnected at a joint **34f**. A wedge member **44f** is illustrated inserted into the joint **34f** between the upper and lower bones **30f** and **32f**.

17

The wedge member 44f is positioned in the joint 34f (FIG. 18) with a relatively narrow width of the wedge member between outer side surfaces 88f and 90f on hard cortical outer layers 76f and 78f of the upper and lower bones 30f and 32f. Although the outer side surfaces 88f and 90f of the upper and lower bones 30f and 32f are in their naturally occurring conditions, it is contemplated that a surgeon may want to prepare the surfaces of the bone for the wedge member 44f by cutting away extraneous material to promote seating of the wedge member 44f on the upper and lower bones 30f and 32f.

The wedge member 44f has an arcuate nose portion 128f and a pivot end portion 150f. The nose portion 128f and pivot end portion 150f are interconnected by side portions 134f and 136f. The side portion 134f has a continuously curving arcuate configuration. The side portion 136f may have a linear configuration.

The side portion 136f has a relatively flat area which engages the outer side surface 90f on the lower bone 32f when the wedge member 44f is oriented as illustrated in FIG. 18. If desired, the side portion 136f could have an arcuate configuration corresponding to the arcuate configuration of the side portion 134f. If the side portion 136f had the same configuration as the side portion 134f, the wedge member 44f would have a symmetrical configuration about an axis extending through the relatively sharply defined pivot end portion 150f.

The wedge member 44f has the same size and configuration throughout its length. Thus, the end portion 50f of the wedge member is the same size as the end portion 52f (FIG. 20). However, if desired, the wedge member 44f could taper from a relatively thick end portion 50f to a relatively thin or small end portion 52f in the manner illustrated in FIGS. 16 and 17 for the wedge members 44d and 44e. It should be understood that any one of the wedge members illustrated in FIGS. 1 through 17 could be formed with the same configuration as the wedge member 44f if desired. However, it is believed that in most instances it will probably be preferred to provide the wedge members of FIGS. 1–17 with an axially tapered configuration to facilitate insertion of the wedge members into the joint between the upper and lower bones.

The wedge member 44f (FIGS. 18, 19 and 20) is formed of a rigid porous open cell material. The rigid porous open cell material of the wedge member 44f has a construction generally similar to coral. However, the wedge member 44f could be formed of a nonporous material if desired.

It is contemplated that the wedge member 44f, like the wedge members illustrated in FIGS. 1–17, may be formed of human or animal bone, metal, ceramic, or a polymeric material. While it may be preferred to form the wedge member 44f of a porous material to enable bone to grow through the wedge member, the wedge member 44f may be formed of a solid material through which bone can not grow.

The wedge member 44f may be coated with or packed with bone growth promoting materials. The bone growth promoting materials may be bone morphogenic proteins and/or other osteoinductive materials. Bone chips may be included with the bone morphogenic proteins and/or other osteoinductive materials packed around the wedge member 44f.

Of course, the wedge member 44f may be provided with a tapered configuration to facilitate insertion into the joint 34f. When the wedge member 44f is to be utilized to change the spatial relationship between the upper and lower bones 30f and 32f, the wedge member is inserted into the joint 34f.

18

The illustrated embodiment of the wedge member 44f has the same size and configuration throughout its length. Therefore, the wedge member 44f does not taper to a thin end portion to facilitate insertion of the wedge member into the joint 34f. Therefore, the joint 34f may be initially expanded with a suitable tool to enable the wedge member 44f to be inserted into the joint, in the orientation illustrated in FIG. 18.

When the wedge member 44f is inserted into the joint 34f, there will be a slight initial expansion of the joint. As was previously mentioned, the wedge member 44f may have an axially tapered configuration, similar to the configuration of the wedge members 44d and 44e (FIGS. 16 and 17), to facilitate insertion of the wedge member 44f into the joint 34f.

As the wedge member 44f is initially inserted into the joint 34f, the side portions 134f and 136f on the wedge member 44f slide along the outer side surfaces 88f and 90f on the upper and lower bones 30f and 32f. At this time, the arcuate nose portion 128f of the wedge member 44f is spaced from the outer side surface surfaces 88f and 90f of the upper and lower bones 30f and 32f.

To further change the spatial relationship between the upper and lower bones 30f and 32f, the wedge member 44f is rotated about an axis extending through a location where the pivot end portion 150f of the wedge member 44f engages the outer side surface 90f of the lower bone 32f. To effect rotation of the wedge member 44f, a suitable tool is inserted into a socket 140f. Force is transmitted through the tool to the wedge member 44f urging the wedge member 44f to rotate in a clockwise direction from the position shown in FIG. 18 to the position shown in FIG. 19.

Upon initial application of the force to the wedge member 44f urging the wedge member to rotate in a clockwise direction (as viewed in FIG. 18), the pivot end portion 150f of the wedge member 44f is pressed against the outer side surface 90f of the lower bone 32f. At the same time, the side portion 134f of the wedge member 44f begins to slide along the outer side surface 88f on the upper bone 30f.

Continued application of force (torque) to the wedge member 44f results in the wedge member pivoting about an axis which extends through a location where the end portion 150f of the wedge member 44f engages the outer side surface 90f on the lower bone 32f. As the wedge member 44f pivots about the end portion 150f, the arcuate nose portion 128f moves into engagement with and slides along the outer side surface 88f on the upper bone 30f. As the wedge member 44f approaches the orientation shown in FIG. 19, the joint 34f is expanded and the spatial relationship between the upper and lower bones 30f and 32f is changed with a resulting change in the angular orientation of the upper and lower bones relative to each other.

When the wedge member 44f reaches the orientation shown in FIG. 19, the joint 34f has been expanded to the maximum extent possible by the wedge member. The wedge member 44f is then connected with the upper and lower bones 30f and 32f by suitable fasteners. The fasteners may extend through mounting tabs, similar to the mounting tabs 144 and 146 illustrated in FIG. 16 or the fasteners may extend through the wedge member in the manner illustrated schematically in FIG. 17. Of course, the wedge member 44f could be held in the upright (as viewed in FIG. 19) orientation in any one of many different manners by a suitable fastener arrangement.

Although only a single wedge member 44f has been shown in FIGS. 18–20, a plurality of the wedge members 44f

could be used to expand the joint 34f and to transmit force between the bones 30f and 32f. Whether a single wedge member 44f or a plurality of wedge members 44f are used to expand the joint, the joint may be packed with bone growth promoting material.

Screw Type Wedge Member

In the embodiment of the invention illustrated in FIGS. 12–16, the wedge member 44d has a relatively smooth outer side surface 126. In the embodiment of the invention illustrated in FIGS. 21 and 22, the wedge member has a configuration similar to the configuration of a screw and has an irregular outer side surface. Since the embodiment of the invention illustrated in FIGS. 21 and 22 is generally similar to the embodiments of the invention illustrated in FIGS. 12–20, similar numerals will be utilized to designate similar components, the suffix letter “g” being associated with the numerals of FIGS. 21 and 22 to avoid confusion.

An upper bone 30g is connected with a lower bone 32g in a patient's body at a joint 34g. It should be understood that the joint 34g has been illustrated schematically in FIG. 21 and may be any joint in a patient's body. A rigid wedge member 44g is utilized to change the spatial relationship between the upper and lower bones 30g and 32g. The wedge member 44g is effective to expand at least a portion of the joint 34g when the wedge member 44g is inserted into the joint 34g.

The wedge member 44g has a thick end portion 50g and a thin end portion 52g. The wedge member 44g has an overall conical configuration. An external thread convolution 160 is formed on the wedge member 44g. The external thread convolution 160 has a spiral configuration and extends from the thick end portion 50g to the thin end portion 52g of the wedge member 44g.

Although the external thread convolution 160 could have many different configurations, the illustrated thread convolution has generally V-shaped crests and roots. The general configuration of the external thread convolution 160 is an American National Form Screw Thread and has a pitch cone with an angle of between five degrees and twenty degrees. Although one specific external thread convolution has been illustrated and described herein, it should be understood that the external thread convolution 160 could have a configuration of any one of many different known thread convolutions. It is believed that it may be desired to use known bone screw thread configurations for the configuration of the external thread convolution 160.

The rigid wedge member 44g may be formed of metal, ceramic, human or animal bone, or suitable polymeric materials. It is believed that it will be desirable to form the wedge member 44g of a material which is sufficiently rigid to withstand the forces transmitted between the upper and lower bones 30g and 32g. If desired, the wedge member 44g may be formed of a porous material having openings through which bone may grow. It is believed that it may be desired to coat the wedge member 44g with a bone growth promoting material.

When the wedge member 44g is to be utilized to change the spatial relationship between the upper and lower bones 30g and 32g, the thin end portion 52g of the wedge member 44g is pressed into the joint 34g between the upper and lower bones 30g and 32g. The wedge member 44g is then rotated about its longitudinal central axis 120g. A hexagonal recess 140g is provided in the wedge member 44g to facilitate the transmission of force from a suitable tool to the wedge member 44g.

As the wedge member 44g is rotated through a plurality of revolutions about its longitudinal central axis 120g, the external thread convolution 160g engages the upper and lower bones 30g and 32g. As the wedge member 44g is rotated about its longitudinal central 120g, the external thread convolution 160g engages the upper and lower bones 30g and 32g and pulls the wedge member into the joint 34g. As this occurs, the joint 34g is expanded and the spatial relationship between the upper and lower bones 30g and 32g is changed.

Once the wedge member 44g has moved into the joint 34g and the spatial relationship between the upper and lower bones 30g and 32g has been changed, the joint 34g may be packed with bone growth promoting materials and/or bone chips. It is contemplated that various known bone morphogenic proteins may be used with other osteoinductive materials to induce bone growth in the joint 34g. Although only a single wedge member 44g is illustrated in FIG. 21, a plurality of wedge members may be used if desired.

Bone Fitting Wedge Member

In the embodiments of the invention illustrated in FIGS. 1–11, the wedge members have flat upper and lower major side surfaces 54 and 56 (FIG. 6). In the embodiment of the invention illustrated in FIGS. 23 and 24, the wedge member has nonlinear side surfaces which have been shaped to correspond to the configuration of end portions of the bone at a joint between the bones. Since the embodiment of the invention illustrated in FIGS. 23 and 24 is generally similar to the embodiments of the invention illustrated in FIGS. 1–11, similar numerals will be utilized to designate similar components, the suffix letter “h” being associated with the numerals of FIG. 9 to avoid confusion.

Upper and lower bones 34h and 32h are interconnected at a joint 34h. The joint 34h is a schematic representation of any one of many joints in a patient's body. The joint 34h may be in a patient's wrist, ankle, hand, foot, back, or other portion of the patient's body.

When the spatial relationship between the upper and lower bones 34h and 32h is to be changed, a wedge member 44h is moved into the joint 34h. The wedge member 44h is moved into the joint with a thick end portion 50h of the wedge member trailing and a thin end portion 52h of the wedge member leading. As the wedge member 44h is pressed into the joint 34h, upper and lower major side surfaces 54h and 56h are pressed against outer side surfaces 88h and 90h on the upper and lower bones 34h and 32h. This results in expansion of the joint 34h in the manner previously described in conjunction with the embodiments of the invention illustrated in FIGS. 1–11.

In accordance with a feature of this embodiment of the invention, the upper and lower major side surfaces 54h and 56h on the wedge member 44h are configured to match the configuration of the outer side surfaces 88h and 90h on the upper and lower bones 34h and 32h, in the manner illustrated schematically in FIG. 24. By having the upper and lower major side surfaces 54h and 56h configured to match the configuration of the outer side surfaces 88h and 90h on the upper and lower bones 34h and 32h, the wedge member 44h is firmly seated against the bone and held against sidewise (as viewed in FIG. 24) movement relative to the bones. The arcuate configuration of the upper and lower major side surfaces 54h and 56h on the wedge member 44h extends from the thick end 50h of the wedge member 44h to the thin end 52h of the wedge member.

In the embodiment of the invention illustrated in FIG. 24, the wedge member 44h is formed of a rigid porous material

having an open cell construction. A compartment or cavity **100h** in the wedge member **44h** holds bone growth inducing materials **110h**. The bone growth inducing materials **110h** may include bone morphogenic proteins and other osteoinductive materials. The joint **34h** may be packed with bone growth promoting materials and/or bone chips.

The wedge member **44h** is fixedly connected to the upper and lower bones **34h** and **32h** by suitable fasteners (not shown). The wedge member **44h** may be connected with the upper and lower bones **34h** and **32h** by screws corresponding to the screws **70** and **72** of FIG. 8. Alternatively, the wedge member **44h** may be connected with the upper and lower bone **34h** and **32h** by screws which extends through mounting tabs, corresponding to the mounting tabs **144** and **146** of FIG. 16. If desired, the wedge member **44h** may be connected with only the upper bone **34h** or only the lower bone **32h**.

It is believed that by having the side surfaces **54h** and **56h** configured to correspond to the configuration of the surfaces **88h** and **090h** on the bones **34h** and **32h**, the joint **34h** will be particularly stable when the joint has been immobilized by connecting the wedge member **44h** to the bones. Although only a single wedge member **34h** has been illustrated in FIGS. 22 and 24, a plurality of wedge members could be used to expand the joint. It is believed that the wedge member **44h** may be particularly advantageous when vertebrae in a patient's back are to be interconnected.

Conclusion

In view of the foregoing description it is apparent that a new and improved method and apparatus is provided to change a spatial relationship between bones **30** and **32** which are interconnected at a joint **34** in a patient's body. When this is to be done, an opening is formed in a portion of the patient's body to expose the joint **34** interconnecting the bones **30** and **32**. One of the bones **30** and **32** is moved relative to the other by expanding at least a portion of the joint **34** with a wedge member **44**. The wedge member **44** is moved into the joint and applies force against the bones **30** and **32**. The opening is closed with the wedge member **44** still disposed in the joint between the bones. Force is then transmitted between the bones **30** and **32** through the wedge member **44** to maintain the joint **34** in an expanded condition.

If the joint **34** is to be flexed after being expanded by the wedge member **44**, the wedge member may be connected with only one of the bones **30** and **32**. Alternatively, if the joint **34** is to be immobilized (fused) after inserting the wedge member **44**, the wedge member may be fixedly connected with the bones **30** and **32** interconnected at the joint. The wedge member **44** may be porous and may be coated with and/or contain bone growth promoting material.

One embodiment of the wedge member **44** has major side surfaces **54** and **56** extending between thick and thin end portions **50** and **52** of the wedge member. The wedge member **44** is moved into the joint **34** with the thin edge portion **52** leading. As the wedge member **44** is moved into the joint **34**, the thick trailing end portion **50** of the wedge member expands the joint.

In another embodiment of the invention, the wedge member **44d**, **44e**, **44f**, or **44g** may be rotated relative to the joint. In one embodiment of the invention, the wedge member **44g** has a circular cross sectional configuration and has an external thread convolution **160** which extends from a thin leading end **52g** of the wedge member to a thick trailing end **50g** of the wedge member. The wedge member **44g** is

pressed into the joint **34g** and rotated to cause the wedge member to expand the joint.

In another embodiment of the invention, the wedge member **44d**, **44e** or **44f** has surface areas **134** and **136** which are relatively close together and other surface areas **128** and **130** which are relatively far apart. The wedge member **44d**, **44e**, or **44f** is moved into the joint **34** with the surface areas **134** and **136** which are close together engaging the adjacent bones **30** and **32**. The wedge member **44d**, **44e** or **44f** is then rotated to apply force against the adjacent bones to expand the joint. The wedge member **44d** or **44e** may be rotated about its central axis **120** to apply force against the bones **30** and **32** and expand the joint. Alternatively, the wedge member **44f** may be rotated about a location where the wedge member engages one of the bones.

Regardless of which embodiment of the wedge members **44**, **44a**, **44b**, **44c**, **44d**, **44e**, **44f**, **44g** or **44h** is selected, the wedge member may be used with any one of the many different bones and joints in a patient's body. The wedge member may be utilized at joints in a patient's wrist, ankle, hand, foot, back, or other portions of the patient's body. The use of the wedge member may be particularly advantageous when a joint between vertebrae in a patient's back is to be immobilized. One or more wedge members may be used to expand a joint to transmit force between bones.

Having described the invention, the following is claimed:

1. A method comprising the steps of changing a spatial relationship between first and second bones which are ginter connected at a joint in a patient's body, said step of changing a spatial relationship between the first and second bones includes moving a wedge member which is at least partially formed of biodegradable material into the joint between the first and second bones, said step of moving the wedge member into the joint between the first and second bones includes moving the second bone from a first orientation relative to the first bone to a second orientation relative to the first bone Under the influence of force applied against the second bone by the wedge member as the wedge member moves into the joint between the first and second bones, thereafter, transmitting force between the first and second bones through the wedge member while the second bone is in the second orientation relative to the first bone, and, thereafter, degrading biodegradable material of the wedge member.

2. A method as set forth in claim 1 further including the step of moving the second bone relative to the first bone under the influence of force applied against the second bone by the patient to change the orientation of the second bone relative to the first bone from the second orientation to a third orientation.

3. A method as set forth in claim 2 further including the steps of maintaining the wedge member stationary relative to one of said first and second bones during movement of said second bone.

4. A method as set forth in claim 1 wherein a first surface area on said first bone is adjacent to a first surface area on said second bone when the first and second bones are in the first orientation prior to performance of said step of moving the wedge member into the joint, said step of moving the wedge member into the joint includes sliding a first surface area on the wedge member along the first surface area on the first bone and sliding a second surface area on the wedge member along the first surface area on the second bone to move the first surface area on the second bone away from the first surface area on the first bone under the influence of force applied against the first surface area on the second bone by the wedge member.

5. A method as set forth in claim 1 wherein said step of moving a wedge member into a joint between the first and second bones includes rotating the wedge member about an axis which extends through the wedge member.

6. A method as set forth in claim 1 wherein said step of moving the wedge member into the joint between the first and second bones includes moving the wedge member along a path which extends between an end portion of the first bone and an end portion of the second bone without rotating the wedge member.

7. A method as set forth in claim 6 wherein said step of moving the wedge member along a path which extends between the end portions of the first and second bones includes increasing a distance between a surface area on the end portion of the first bone and a surface area on the second bone under the influence of force transmitted from the wedge member to the end portions of the first and second bones.

8. A method as set forth in claim 1 wherein said step of moving a wedge member into the joint between the first and second bones is performed with a thin end portion of the wedge member leading and a thick end portion of the wedge member trailing.

9. A method as set forth in claim 1 further including the steps of providing a plurality of wedge members at a location where an operation is to be performed on the patient, said step of providing a plurality of wedge members includes providing a plurality of wedge members having different acute angles between opposite side surfaces of the wedge members, and selecting one wedge member of the plurality of wedge members while the plurality of wedge members is at the location where an operation is to be performed on the patient, said step of transmitting force between the first and second bones through the wedge member includes transmitting force between the first and second bones through the selected one wedge member of the plurality of wedge members.

10. A method as set forth in claim 1 further including the steps of providing a plurality of wedge members at a location where an operation is to be performed on the patient, said step of providing a plurality of wedge members includes providing a plurality of wedge members of different sizes, and selecting one wedge member of the plurality of wedge members while the plurality of wedge members is at the location where an operation is to be performed on the patient, said step of transmitting force between the first and second bones through the wedge member includes transmitting force between the first and second bones through the selected one wedge member of the plurality of wedge members.

11. A method comprising the steps of changing a spatial relationship between first and second bones which are interconnected at a joint in a patient's body, said step of changing a spatial relationship between the first and second bones includes providing a plurality of wedge members at a location where an operation is to be performed on the patient, said step of providing a plurality of wedge members includes providing a plurality of wedge members of different sizes, selecting one wedge member from the plurality of wedge members while the plurality of wedge members is at the location where an operation is to be performed on the patient, moving the selected one of the plurality of wedge members into the joint between the first and second bones to move the second bone from a first orientation relative to the first bone to a second orientation relative to the first bone under the influence of force applied against the second bone by the selected one of the plurality of wedge members as the

selected one of the plurality of wedge members moves into the joint between the first and second bones, and transmitting force between the first and second bones through the selected one of the plurality of wedge members while the second bone is in the second orientation relative to the first bone.

12. A method as set forth in claim 11 wherein the selected one of the plurality of wedge members is at least partially formed of biodegradable material, said method further includes the step of degrading biodegradable material of the selected one of the plurality of wedge members.

13. A method as set forth in claim 11 further including the steps of abrading a surface on the first bone and abrading a surface on the second bone prior to performing said step of moving the selected one of the plurality of wedge members into the joint between the first and second bones, said step of moving the selected one of the plurality of wedge members into the joint between the first and second bones includes engaging the abraded surface on the first bone with a first surface on the selected one of the plurality of wedge members and engaging the abraded surface on the second bone with a second surface on the selected one of the plurality of wedge members.

14. A method as set forth in claim 11 wherein said step of providing a plurality of wedge members of different sizes includes providing a plurality of wedge members with each wedge member having small openings extending through the wedge member to enable body tissue to grow through the selected wedge member of the plurality of wedge members while the selected wedge member is disposed in the joint between the first and second bones.

15. A method as set forth in claim 11 wherein said step of providing a plurality of wedge members of different sizes includes providing a plurality of wedge members formed of human bone.

16. A method as set forth in claim 11 wherein said step of providing a plurality of wedge members of different sizes includes providing a plurality of wedge members formed of animal bone.

17. A method as set forth in claim 11 wherein said step of providing a plurality of wedge members of different sizes includes providing a plurality of wedge members formed of metal.

18. A method as set forth in claim 11 wherein said step of providing a plurality of wedge members of different sizes includes providing a plurality of wedge members formed of porous material.

19. A method as set forth in claim 11 wherein said step of providing a plurality of wedge members of different sizes includes providing a plurality of wedge members formed of biodegradable material.

20. A method as set forth in claim 11 wherein said step of providing a plurality of wedge members of different sizes includes providing a plurality of wedge members formed of polymeric material.

21. A method as set forth in claim 11 further including the steps of fixedly securing the selected one of the plurality of wedge members to the first bone and fixedly securing the selected one of the plurality of wedge members to the second bone to prevent movement between the selected one of the plurality of wedge members and the first and second bones.

22. A method as set forth in claim 11 wherein each of the wedge members of the plurality of wedge members tapers from a thick end portion to a thin end portion, said step of moving the selected one of the plurality of wedge members into the joint between the first and second bones includes moving the selected one of the wedge members into the joint

25

between the first and second bones with the thin end portion of the selected one of the plurality of wedge members leading and the thick end portion of the selected one of the plurality of wedge members trailing.

23. A method as set forth in claim 22 further including the steps of connecting the selected one of the plurality of wedge members with the first bone with a first fastener which extends from the thick end portion of the selected one of the wedge members into the first bone at a location disposed between the first and second bones, and connecting the selected one of the plurality of wedge members with the second bone with a second fastener which extends from the thick end portion of the selected one of the wedge members into the second bone at a location disposed between the first and second bones.

24. A method as set forth in claim 11 wherein said step of moving the selected one of the plurality of wedge members into the joint between the first and second bones includes sliding a first side of the wedge member along a surface on the first bone and sliding a second side of the wedge member along a surface on the second bone, said method further includes moving a first fastener through the first side of wedge member and through the surface on the first bone to connect the wedge member with the first bone and moving a second fastener through the second side of the wedge member and through the surface on the second bone to connect the wedge member with the second bone.

25. A method comprising the steps of providing a plurality of wedge members formed of bone at a location where an operation is to be performed on the patient, selecting one wedge member formed of bone from the plurality of wedge members formed of bone while the plurality of wedge members formed of bone is at the location where an operation is to be performed on the patient, moving the selected one of the plurality of wedge members formed of bone into the joint between the first and second bones, and transmitting force between the first and second bones through the selected one of the plurality of wedge members formed of bone.

26. A method as set forth in claim 25 further including the step of moving the second bone relative to the first bone under the influence of force applied against the second bone by the patient to change the orientation of the second bone relative to the first bone from the second orientation to a third orientation.

27. A method as set forth in claim 26 further including the steps of maintaining the selected one of the plurality of wedge members formed of bone stationary relative to one of said first and second bones during movement of said second bone.

28. A method as set forth in claim 25 wherein a first surface area on said first bone is adjacent to a first surface area on said second bone when the first and second bones are in a first orientation prior to performance of said step of moving the selected one of the plurality of wedge members formed of bone into the joint, said step of moving the selected one of the plurality of wedge members formed of bone into the joint includes sliding a first surface area on the selected one of the plurality of wedge members formed of bone along the first surface area on the first bone and sliding a second surface area on the selected one of the plurality of selected one of the plurality of wedge members formed of bone formed of bone along the first surface area on the second bone to move the first surface area on the second bone away from the first surface area on the first bone under the influence of force applied against the first surface area on the second bone by the selected one of the plurality of wedge members formed of bone.

26

29. A method as set forth in claim 25 wherein said step of moving the selected one of the plurality of wedge members formed of bone into a joint between the first and second bones includes rotating the selected one of the plurality of wedge members formed of bone about an axis which extends through the selected one of the plurality of wedge members formed of bone.

30. A method as set forth in claim 25 wherein said step of moving the selected one of the plurality of wedge members formed of bone into the joint between the first and second bones includes moving the selected one of the plurality of wedge members formed of bone along a path which extends between an end portion of the first bone and an end portion of the second bone without rotating the selected one of the plurality of wedge members formed of bone.

31. A method as set forth in claim 30 wherein said step of moving the selected one of the plurality of wedge members formed of bone along a path which extends between the end portions of the first and second bones includes increasing a distance between a surface area on the end portion of the first bone and a surface area on the second bone under the influence of force transmitted from the selected one of the plurality of wedge members formed of bone to the end portions of the first and second bones.

32. A method as set forth in claim 25 wherein said step of moving the selected one of the plurality of wedge members formed of bone into the joint between the first and second bones is performed with a thin end portion of the selected one of the plurality of wedge members formed of bone leading and a thick end portion of the selected one of the plurality of wedge members formed of bone trailing.

33. A method as set forth in claim 25 wherein said step of providing a plurality of wedge members formed of bone includes providing a plurality of wedge members formed of bone having different acute angles between opposite side surfaces of the wedge members.

34. A method comprising the steps of changing a spatial relationship between first and second bones which are interconnected at a joint in a patient's body, said step of changing the spatial relationship between the first and second bones includes abrading a portion of the first bone at the joint between the first and second bones, abrading a portion of the second bone at the joint between the first and second bones, providing a wedge member which is at least partially formed of biodegradable material, and moving the wedge member which is at least partially formed of biodegradable material into the joint between the first and second bones, said step of moving the wedge member which is at least partially formed of biodegradable material into the joint between the first and second bones includes engaging the abraded portion of the first bone with the wedge member and engaging the abraded portion of the second bone with the wedge member.

35. A method as set forth in claim 34 further including the steps of providing a plurality of porous wedge members at a location where an operation is to be performed on the patient, said step of providing a plurality of porous wedge members includes providing a plurality of wedge members of different sizes, and selecting one wedge member from the plurality of wedge members for movement into the joint between the first and second bones while the plurality of wedge members is at the location where the operation is to be performed on the patient.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,423,063 B1
DATED : July 23, 2002
INVENTOR(S) : Peter M. Bonutti

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 23,

Line 45, change "[Oax4]o" to -- to --

Signed and Sealed this

First Day of April, 2003

A handwritten signature in black ink, appearing to read "James E. Rogan", with a long horizontal flourish extending from the bottom of the signature.

JAMES E. ROGAN
Director of the United States Patent and Trademark Office