UNITED STATES PATENT AND TRADEMARK OFFICE

BEFORE THE PATENT TRIAL AND APPEAL BOARD

GLOBUS MEDICAL, INC., Petitioner

v.

MOSKOWITZ FAMILY LLC, Patent Owner

Case No.: IPR2020-01306 U.S. Patent No. 10,478,319 Issued: November 19, 2019 Application No: 16/280,684 Filed: February 20, 2019

PETITION FOR *INTER PARTES* REVIEW OF U.S. PATENT NO. 10,478,319 PURSUANT TO 35 U.S.C. §§ 311–319 AND 37 C.F.R. § 42

TABLE OF CONTENTS

I.	INTRODUCTION			
II.	MANDATORY NOTICES - 37 C.F.R § 42.8			
	A.	A. Real Party in Interest (37 C.F.R. § 42.8(b)(1))1		
	B.	Related Matters (37 C.F.R. § 42.8(b)(2))		
	C.	Designation of Lead and Backup Counsel (37 C.F.R.§ 42.8(b)(3))3		
	D.	Notice of Service (37 C.F.R. § 42.8(b)(4))		
III.	PA	YMENT OF FEES – 37 C.F.R. § 42.103		
IV.	REC	QUIREMENTS FOR IPR UNDER 37 C.F.R. § 42.104		
	A.	Grounds for Standing (37 C.F.R. § 42.104(a))		
	B.	Challenge Under 37 C.F.R. § 42.104(b) and Relief Requested		
V.	SUI	MMARY OF THE '319 PATENT (EX1001)		
	A.	The '319 Patent Specification and Claims		
	B.	The '319 Patent Prosecution History (EX1002)		
VI.	CLA	AIM CONSTRUCTION11		
VII.	THI	E LEVEL OF SKILL IN THE ART 12		
VIII.	THI	E PRIOR ART RELIED UPON IN THIS PETITION		
	A.	Allen (EX1031)		
	B.	Chung (EX1033)14		
	C.	McLuen (EX1030)16		
	D.	Sutcliffe (EX1032)17		
IX.		OUND 1: ALLEN IN VIEW OF CHUNG AND MCLUEN RENDER AIMS 1-4, 7-9, 11-12, 14-15, AND 18-21 OBVIOUS		

	A. Independent Claim 1	19
X.	GROUND 2: ALLEN IN VIEW OF CHUNG, IN VIEW OF McLUEN, AND IN FURTHER VIEW OF SUTCLIFFE RENDER CLAIM 5 OBVIOUS	
XI.	THIS PETITION SHOULD NOT BE DISCRETIONARILY DENIED	
XII.	CONCLUSION	67

TABLE OF AUTHORITIES

Cases

Advanced Bionics, LLC v. MED-EL Elektromedizinische Geräte GmbH, IPR2019- 01469, Paper 6 (Feb. 13, 2020)
Becton, Dickinson & Co. v. B. Braun Melsungen AG, IPR2017-01586, Paper 8 (Dec. 15, 2017)
General Plastic Co., Ltd. v. Canon Kabushiki Kaisha, Case IPR2016-01357 (PTAB Sept. 6, 2017) (Paper 19)
<i>NHK Spring Co. v. Intri-Plex Techs., Inc.,</i> IPR2018-00752, Paper 8 (PTAB Sept. 12, 2018)
Phillips v. AWH Corp., 415 F.3d 1303 (Fed. Cir. 2005)11
Statutes
35 U.S.C. § 102(a)16
35 U.S.C. § 102(b) 13, 14, 17
35 U.S.C. § 1031, 5
35 U.S.C. § 103(a)4, 5
35 U.S.C. § 282(b)11
35 U.S.C. § 315(b)67
35 U.S.C. § 325(d)
37 C.F.R. § 42.100(b)11
Other Authorities
157 Cong. Rec. S5429 (daily ed. Sept. 8, 2011)67
Regulations
35 U.S.C. § 314(a)

	37 C.F.R § 42
4	37 C.F.R. § 42
	37 C.F.R. § 42
4	37 C.F.R. § 42
	37 C.F.R. § 42
	37 C.F.R. § 42
)(i)	37 C.F.R. § 42
	37 C.F.R. § 42
1	37 C.F.R. § 42
	37 C.F.R. § 42
	37 C.F.R. § 42
4	37 C.F.R. § 42

EXHIBITS

Exhibit #	Description			
1001	U.S. Patent No. 10,478,319			
1002	Prosecution history of U.S. Patent No. 10,478,319			
1003	Declaration of Jorge A. Ochoa, Ph.D., P.E.			
1004	Curriculum Vitae of Jorge A. Ochoa, Ph.D., P.E.			
1005	U.S. Patent Publication No. 2005/0177236 to Mathieu et al.			
1006	Auguste, KI, M.D., Chin, C, M.D., Acosta, FL, M.D., Ames, CP,			
	M.D. Expandable cylindrical cages in the cervical spine: a review of 22 cases. J. Neurosurg Spine 4:285-291, 2006			
1007	Boakye, M, Mummaneni, P, Rodts, GW, Haid, RW. The Poly-ether-			
1007	ether-ketone (PEEK) Spacer. Thieme Medical Publishers, Inc., 2005			
1008	Cheung KMC, Leong, JCY. "Spinal Instrumentation Overview in			
	Lumbar Degenerative Disorders: Cages", Chapter 26 in The Lumbar			
	Spine, 3rd Edition, Herkowitz et al. editors, 2004, Lippincott			
	Williams & Wilkins, Philadelphia.			
1009	Centinel Spine. The Gold Standard in Integrated Interbody			
	Technologies, Centinelspine.com. © 2020 Centinel Spine, LLC			
1010Dickman, CA, M.D. Internal Fixation and Fusion of the Lu Spine Using Threaded Interbody Cages. Div. of Neurologic				
			Surgery, Barrow Neurological Institute, Mercy Healthcare Arizona, 1997	
1011	Dryer, RF. Affinity Anterior Cervical Cage System. Thieme, Spinal			
1012	Instrumentation, Surgical Techniques. 2005			
1012	Folman, Y, Lee, S-H, Silvera, JR, Gepstein, R. Posterior Lumbar Interbody Fusion for Degenerative Disc Disease Using a Minimally			
	Invasive B-Twin Expandable Spinal Spacer. A Multicenter Study. J.			
	of Spinal Disorders & Techniques, Vo. 16, No. 5, pp. 455-460. 2003			
1013	Guyer, RD, Ohnmeiss, DD. Degenerative Disc Disease: Fusion			
1010	Cages and Dowels. The Lumbar Spine, Third Edition, Chapter 35,			
	Degenerative Disc Disease. 2004			
1014	Holte, DC, O'Brien, JP, Renton, P. Anterior lumbar fusion using a			
	hybrid interbody graft. A preliminary radiographic report. Eur Spin J			
	(1994) 3:32-28			
1015	Lane, JD, Jr. M.D., F.A.C.S., Moore, ES, M.D Transperitoneal			
	Approach to the Intervertebral Disc in the Lumbar Area. Annals of			
	Surgery, Vol. 127, Number 3, March 1948			

Exhibit #	Description		
1016	Michelson, GK, Griffith, SL. BAK/C Interbody Fusion System: A		
	Threaded Cylindrical Cage for Cervical Fusion. Thieme, Spinal		
	Instrumentation, Surgical Techniques. 2005.		
1017	Prpa, B, Whitfield, MD, Lieberman, IH. Lumbar Interbody Cages.		
	Spine Surgery, Vol. 1, Second Ed., Techniques, Complication		
	Avoidance, and Management. 2005.		
1018	Ryu, SI, Kim, DH. Cervical Carbon Fiber Interbody Fusion Cage:		
	Bengal System. Thieme, Spinal Instrumentation Surgical Techniques, Chapter 34, 2005		
	Techniques, Chapter 34. 2005		
1019	Schimmel, JJP, MSC, Poeschmann, MS, M.D., Horsting, PP, M.D.,		
	Schönfeld, DHW, M.D., van Limbeek, J, M.D., Ph.D., Pavlov, PW,		
	M.D., Ph.D. PEEK Cages in Lumbar Fusion. Mid-term Clinical		
	Outcome and Radiologic Fusion. Clin, Spine Surg. Vol. 29, Number		
	5, June 2016		
1020	Technique Guide: SynFix-LR. Implant and instrumentation for		
	standalone anterior lumbar interbody fusion (ALIF). © 2006		
	Synthes		
1021	SYNFIX® EVOLUTION System		
	https://www.jnjmedicaldevices.com/en-US/product/synfixr- evolution-system, accessed June 5, 2020.		
	evolution-system, accessed June 5, 2020.		
1022	K053508, 510 (k) Summary: SynFix-LR, Synthes Spine. 2/13/2006		
1023	Wagner, PC, M.S., D.V.M., Bagby, GW, M.S., Grant, BD, D.V.M.,		
	M.S., Gallina, A, D.V.M., Ph.D., Ratzlaff, M., D.V.M., Ph.D.,		
	Sande, Ron, D.V.M., Ph.D. Surgical Stabilization of the Equine Cervical Spine. Am. Col. Of Veterinary Surgery. 1979.		
1004			
1024	Weiner, BK., M.D., Fraser, RD., M.D., F.R.A.C.S. SPINE Vol. 23,		
1025	Number 5, pp. 634-640. 1998		
1025	Wilke, HJ, Kettler, A., Claes, L. Primary stabilizing effect of		
	interbody fusion devices for the cervical spine: an in vitro		
	comparison between three different cage types and bone cement.		
1026	Eur. Spine J. (2000) 9:410-416		
1020	Wiseman, DB, Shaffrey, CI, Lanzino, G. Posterior Lumbar Interbody Eusion Spine Surgery Vol One Second Ed Techniques		
	Interbody Fusion. Spine Surgery, Vol. One, Second Ed. Techniques,		
	Complication Avoidance, and Management, Chapter 39. 2005		
1027	Invalidity Claim Chart regarding U.S. Patent No. 10,478,319		
1028	Intentionally Left Blank		
1029	Intentionally Left Blank		
104/			

Exhibit #	Description	
1030	U.S. Patent Application Publication No. 2006/0253201 to McLuen	
1031	U.S. Patent No. 5,658,335 to Allen	
1032	U.S. Patent Application Publication No. 2002/0143399 to Sutcliffe	
1033	Korean Patent No. 20-0290058 to Chung et al. and Certified English	
	Translation	
1034	Moskowitz Family LLC Disclosure of Infringement Contentions	
1035	Order Granting Defendant Globus Medical's Motion to Transfer	
	Venue Under 28 U.S.C. § 1404(a)	
1036	Lex Machina Report	

I. INTRODUCTION

Petitioner Globus Medical, Inc. ("Globus" or "Petitioner") hereby petitions for *inter partes* review ("IPR") of claims 1-5, 7-9, 11, 12, 14, 15, and 18-21 (the "Challenged Claims") of U.S. Patent No. 10,478,319, titled "System With Tool Assembly And Expandable Spinal Implant" ("the '319 patent"), issued to Ahmnon D. Moskowitz, et al. and assigned to Moskowitz Family LLC ("Moskowitz"). The '913 patent is attached as EX1001.

The Challenged Claims are directed to a well-known expandable intervertebral implant and a surgical tool for positioning and expanding the implant into the intervertebral space. A specific listing of Petitioner's asserted grounds for unpatentability and a comparison of the prior art to the Challenged Claims is referenced below. Evidentiary support is provided in the Declaration of Jorge A. Ochoa, Ph.D., P.E. EX1003.

For the reasons set forth herein, Petitioner seeks a final written decision that the Challenged Claims of the '319 patent are unpatentable as obvious pursuant to 35 U.S.C. § 103.

II. MANDATORY NOTICES - 37 C.F.R § 42.8

A. <u>Real Party in Interest (37 C.F.R. § 42.8(b)(1))</u>

Globus Medical, Inc. ("Globus") is the real party-in-interest. No other party had access to the Petition, and no other party had any control over, or contributed to any funding of, the preparation or filing of the Petition.

B. <u>Related Matters (37 C.F.R. § 42.8(b)(2))</u>

Petitioner is unaware of any disclaimers or reexamination certificates of the '319 patent.

The '319 patent was the subject of the civil action known as *Moskowitz Family LLC v. Globus Medical Inc.*, U.S. District Court for the Western District of Texas, civil action no. 6:19-cv-672, filed November 20, 2019 ("the Original Litigation"). On July 2, 2020, Judge Alan Albright granted Petitioner's motion for transfer to the Eastern District of Pennsylvania ("EDPA"). EX1035. The Original Litigation formally transferred to the EDPA on July 6, 2020 and is docketed as *Moskowitz Family LLC v. Globus Medical Inc.*, U.S. District Court for the EDPA, civil action no. 2:20-cv-03271 ("Pending Litigation").

Petitioner is concurrently filing IPR Petitions for the following patents: U.S. Patent No. 8,353,913 ("the '913 patent"); U.S. Patent No. 10,307,268 ("the '268 patent"); U.S. Patent No. 9,889,022 ("the '022 patent"). The '913, '268 and '022 patents are related to the '319 patent through continuation practice. Petitioner understands that the '319 patent, the '913 patent, the '268 patent and the '022 patent are all commonly owned by Moskowitz.

Petitioner is also concurrently filing IPR Petitions for U.S. Patent Nos. 10,251,643 ("the '643 patent") and 10,028,740 ("the '740 patent"). The '643 and

'740 patents, although not directly related to the '913 patent, disclose similar subject matter and claim priority in a common provisional patent application No. 60/670,231. Petitioner understands that the '643 and '740 patents are likewise commonly owned by Moskowitz.

Petitioner is also concurrently filing a first IPR petition for the '268 patent to address the Challenged Claims. As explained in the first petition (ranked first by the Petitioner for review by the Board), to the extent the Board declines to exercise its discretion under 35 U.S.C. § 325(d) and institutes the first petition (IPR2020-01305), Petitioner does not seek institution of this second petition (IPR2020-01306). However, if the Board exercises its discretion to deny institution of the first petition under 35 U.S.C. § 325(d) or on the merits, then Petitioner seeks institution of this second petition.¹

Backup Counsel
David P. Utykanski (Reg. No. 39,052)
HARNESS, DICKEY & PIERCE, P.L.C.
5445 Corporate Dr., Suite 200
Troy, MI 48098
248-641-1600 (telephone)
248-641-0270 (facsimile)
dutykanski@hdp.com

C. Designation of Lead and Backup Counsel (37 C.F.R.§ 42.8(b)(3))

¹ The Board should not exercise its discretion under 35 U.S.C. § 314(a) based on at least the same basis and otherwise under the factors set forth in *General Plastic Co., Ltd. v. Canon Kabushiki Kaisha*, Case IPR2016-01357 (PTAB Sept. 6, 2017) (Paper 19). Petitioner addresses § 314(a) in section XI.

A Power of Attorney (37 C.F.R. § 42.10(b)) is filed concurrently with this Petition.

D. <u>Notice of Service (37 C.F.R. § 42.8(b)(4))</u>

Please direct all correspondence to lead counsel at the above address. Petitioner consents to email service at the above-referenced email addresses.

III. PAYMENT OF FEES – 37 C.F.R. § 42.103

Petitioner authorizes the Office to charge Deposit Account No. 08-0750 for the petition fee set in 37 C.F.R. § 42.15(a). The Office is authorized to charge any fee deficiency, or credit any overpayment, to Deposit Acct. No. 08-0750.

IV. REQUIREMENTS FOR IPR UNDER 37 C.F.R. § 42.104

A. Grounds for Standing (37 C.F.R. § 42.104(a))

Petitioner certifies that the '319 patent is available for IPR and that Petitioner is not barred or estopped from requesting an IPR. Petitioner notes that service of the Summons and Complaint in the Original Litigation occurred on November 21, 2019.

B. Challenge Under 37 C.F.R. § 42.104(b) and Relief Requested

Petitioner requests an IPR of the Challenged Claims on the following grounds:

Ground	Challenged Claims	Asserted Prior Art	Statutory Grounds
1	1-4, 7-9, 11-12, 14- 15, 18-21	U.S. Patent No. 5,658,335 to Allen ("Allen")	35 U.S.C. § 103(a)
	10, 10 -1	(EX1031) in view of KR 20-0290058 to Chung et	
		al. ("Chung") (EX1033)	

Ground	Challenged Claims	Asserted Prior Art	Statutory Grounds
		in view of U.S. Patent Application Publication No. 2006/0253201 to McLuen ("McLuen") (EX1030)	
2	5	U.S. Patent No. 5,658,335 to Allen ("Allen") (EX1031) in view of KR 20-0290058 to Chung et al. ("Chung") (EX1033) in view of U.S. Patent Application Publication No. 2006/0253201 to McLuen ("McLuen") (EX1030) in further view of U.S. Patent Application Publication No. 2002/0143399 to Sutcliffe ("Sutcliffe") (EX1032)	35 U.S.C. § 103(a)

Based on the foregoing grounds, and as supported by the declaration of Dr. Jorge Ochoa (EX1003) (as detailed in Sections IX. and X.), Petitioner seeks a final written decision that the Challenged Claims are unpatentable as obvious under 35 U.S.C. § 103.

V. SUMMARY OF THE '319 PATENT (EX1001)


The '319 patent issued on November 19, 2019, on an application filed on February 20, 2019. The '319 patent is a continuation of U.S. Application Serial No. 15/894,471 filed February 12, 2018, which is a continuation of 13/210,157, filed August 15, 2011, now U.S. Patent No. 9,889,022 which is a continuation of U.S.

Application Serial No. 13/108,982, filed on May 16, 2011, now U.S. Patent No. 9,005,293, and a continuation of U.S. Application Serial No. 13/084,543 filed on April 11, 2011, now U.S. Patent No. 8,353,913, which is a continuation of U.S. Application Serial No. 11/842,855, filed August 21, 2007, now U.S. Patent No. 7,942,903, said application No. 13/108,982 is a continuation of U.S. Application Serial No. 11/842,855 filed on August 21, 2007, now U.S. Patent No. 7,942,903, which is a continuation-in-part of U.S. Application Serial No. 11/536,815 filed September 29, 2006 issued as U.S. Patent No. 7,846,188, which is a continuation-in-part of U.S. Application Serial No. 11/208,644 filed August 23, 2005, issued as U.S. Patent No. 7,704,279. The application claims priority to provisional application No. 60/670,231 filed April 12, 2005,² EX1001.

A. <u>The '319 Patent Specification and Claims</u>

The '319 patent is generally directed to intervertebral expandable implants and is most easily characterized for purposes of this petition by referencing FIGs. 1B and 1D.

² Patentee in the Pending Litigation de-designated the Disclosure of Infringement Contentions. In the disclosure the patentee confirms "[t]he earliest date of invention for each asserted claim of the '319 patent is July 31, 2007." EX1034 at p. 10, II. H. Petitioner relies on this admission.

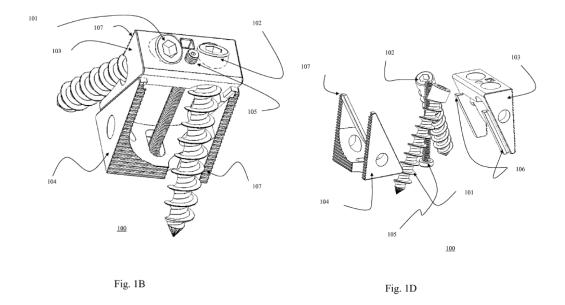


EX1001, FIGs. 1B and 1C.

In view of FIG 1B and 1D, the '319 patent states:

The expandable box 100 consists of top and bottom triangular sliding bases 103, 104 (FIGS. 1-D). The superior and inferior segments of the height/depth adjusting screw 105 are integrated and connected to the two separate top and bottom triangular bases 103, 104, respectively. By turning this adjusting screw 105 back and forth i.e. clock-wise, and counter clockwise, the sliding rails 106 of the top triangular base 103 (FIG. 1D) slide up and down the rail inserts 107 on the bottom triangular base 104 (FIG. 1D). This action will simultaneously alter the intervertebral height and depth of the screw box 100 allowing individualized custom fitting of the screw box 100 conforming to the dimensions of the disc space.

EX1001 at 7:49-61.

The '319 patent also discloses a tool for positioning and expanding an intervertebral expandable implant and is most easily characterized for purposes of this petition by referencing FIGs. 5A and C:

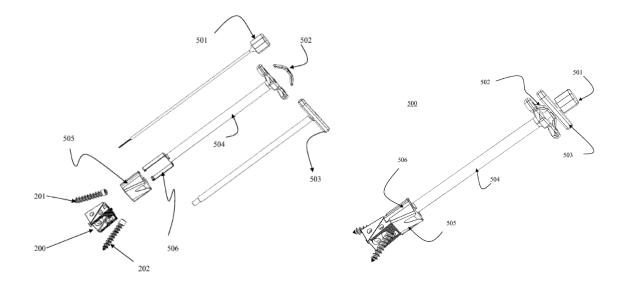



```
Fig. 5A
```

EX1001, FIGs. 5A and 5C.

In view of Fig 5A and C, the '319 patent states:

The key components of this device include an Allen key 501, a spring 502, a handle 503, a griper 504 and a screw guide 505. The Allen key 501 when inserted in the insertion 514 and turned, turns the screw adjuster (FIG. 5C) which in turn regulates top and bottom triangular screw box base sliding, and hence box 200 width and depth. The griper 504 has griper prongs 506 which insert into grooves of the screw guide 505 and the screw box 200 (FIGS. 5A-D) thus perfectly aligning them.

EX1001 at 8:62-9:3.

B. <u>The '319 Patent Prosecution History (EX1002)</u>

The prosecution history for the '319 patent is relevant here to the extent that the Baynham reference was of record, but not used by the Examiner during prosecution. The Examiner did note, however, that the reference was "considered pertinent to applicant's disclosure." EX1002 at 117.

Petitioner acknowledges the precedential opinion of *Advanced Bionics*, *LLC v. MED-EL Elektromedizinische Geräte GmbH*, IPR2019-01469, Paper 6 (Feb. 13, 2020) (precedential), and the factors cited in *Becton, Dickinson & Co. v. B. Braun Melsungen AG*, IPR2017-01586, Paper 8 (Dec. 15, 2017). Petitioner notes, however, that the Baynham reference, including what it discloses how it was used by the examiner in prosecution, does not support the Board exercising its discretion to deny institution under 35 U.S.C. § 325(d). The facts and details are addressed in view of the prosecution history that follows. On February 20, 2019, the applicant filed U.S. Application No. 16/280,684, that eventually issued as the '319 Patent. EX1002 at 250-279.

On March 19, 2019, the Examiner issued a Restriction Requirement noting that the claims were directed to three distinct species, one of which was identified as "...species III, claims a tool assembly." EX1002 at 206. This was further identified by the Examiner as "Figs. 5A-5C relating to claims 13-14." *Id*.

On May 6, 2019, the Applicant filed a response to the Restriction Requirement, cancelling claims 1-12, amending claims 13 and 14, and adding claims 15-32. Of note, the claims as amended were all directed to a tool for positioning and expanding an intervertebral implant, the applicant noting that "the third identified species corresponding to Figs. 5A-5C (as well as 5D-5I) and claims 13-14 (as well

9

as new claims 15-32)" were elected for examination." EX1002 at 193-202.

On May 7, 2019, the applicant filed a Supplemental Amendment in which claims 18, 20 and 31 were amended to "correct clarity and antecedent bases" and claims 33-34 directed to a tool for positioning and expanding an intervertebral expandable implant were added. EX1002 at 175-185.

On July 16, 2019, the Examiner issued a non-statutory double-patenting rejection as to all pending claims as unpatentable over claims over 1-26 of U.S. Patent No. 10,307,268. The Examiner further noted that "the prior art made of record and not relied upon is considered to pertinent to applicant's disclosure." This prior art included the Baynham reference. EX1002 at 115-117.

On July 16, 2019 (the same day on which the Non-Final Office Action issued), the applicant filed its response, wherein it submitted a Terminal Disclaimer, an amendment to claim 31 to amend for clarity and the addition of claim 35. EX1002 at 140-155.

On August 30, 2019, the examiner issued a Notice of Allowance (EX1002 at 84) and on the same day the applicant filed an Amendment After Allowance cancelling claims 33-34. EX1002 at 96-106.

On September 19, 2019, the applicant filed a Corrected Application with substitute drawings correcting Fig. 1A and Substitute Specification adding missing numerals. EX1002 at 10-65.

10

On September 25, 2019, the examiner entered the Amendment filed by the applicant on September 19, 2019. EX1002 at 5.

During prosecution, the Baynham reference was never used by the examiner to reject the intervertebral expandable implant claims. In fact, no prior art reference, including Baynham, was ever characterized or used by the examiner to reject any claim.

As noted below in sections X. and XI., Chung is used to address the subject matter of an intervertebral expandable implant and Allen is used to address the subject matter of a tool for positioning and expanding the implant. Chung, Allen and the remaining prior art references used herein were not of record. The prior art combination of Allen directed to a tool and Chung directed to an intervertebral expandable implant as used herein was never of record.

VI. CLAIM CONSTRUCTION

In an IPR proceeding, a claim of a patent "shall be construed using the same claim construction standard that would be used to construe the claim in a civil action under 35 U.S.C. 282(b), including construing the claim in accordance with the ordinary and customary meaning of such claim as understood by one of ordinary skill in the art and the prosecution history pertaining to the patent."³

³ 37 C.F.R. § 42.100(b); *see Phillips v. AWH Corp.*, 415 F.3d 1303, 1312-13 (Fed. Cir. 2005) (en banc).

Petitioner submits that the claim terms require no express construction and that they should be given their ordinary and customary meaning. This is true for all limitations, except Petitioner submits that the following claim terms should be construed in accordance with the intrinsic evidence and Petitioner offered the same constructions in the Pending Litigation:⁴

Claim Term	Globus's Construction
"first expandable spinal implant	"a [first/second] implant structure
structure" / "second expandable spinal	comprising the [first/second] vertebral
implant structure"	body engagement surface"

Petitioner, however, expressly reserves its right to argue a different claim construction in a different forum for any term in the '319 patent, as appropriate in that proceeding.

VII. THE LEVEL OF SKILL IN THE ART

As established in the Declaration of Dr. Ochoa (EX1003 at 28-30; EX1004), a person having ordinary skill in the art (PHOSITA) of the '319 patent would have a Bachelor's or equivalent degree in Mechanical Engineering or a related discipline (e.g. biomechanics or biomedical engineering), and at least five years of experience.

⁴ Moskowitz asserted in the Pending Litigation that all claim terms take their plain and ordinary meaning. Under the proposed constructions or the plain and ordinary meaning, application of the cited art herein leads to the same conclusion that the Challenged Claims are unpatentable.


The experience would consist of a) designing, developing, evaluating and/or using prosthetic devices, b) anatomy, physiology and biology of soft and calcified tissues including bone healing and fusion, and c) biomechanical and functional loading of orthopedic implants. Alternatively, a PHOSITA could have an advanced degree, in the technical disciplines provided above, or a Doctor of Medicine, and at least two years of experience in the subject areas provided above.

VIII. THE PRIOR ART RELIED UPON IN THIS PETITION

A. <u>Allen (EX1031)</u>

Allen, entitled "Spinal Fixator," issued on August 19, 1997. Allen is prior art to the '319 patent under 35 U.S.C. § 102(b) (Pre-AIA). Allen was not considered by the Examiner during the prosecution of the application leading to the '319 patent.

Allen discloses a tool for positioning and expanding an intervertebral expandable implant, as best characterized for purposes of this petition by FIG 12:

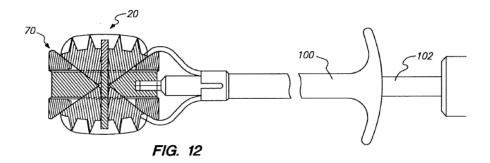

EX1031; FIG. 12.

Allen discloses that:


A conventional, hollow insertion tool 100 is used to gasp a nut assembly 70 to insert the retracted spinal fixator 20 between the two vertebrae bodies 4. Following placement as in FIG. 1, a tool 102 having a terminus defining a hex configuration is inserted through the insertion tool 100 to engage in aperture 60 in the core member 50. The tool 102 is used to rotate core member 50 to extend the crowns 90 outwardly thereby forcing the teeth 98 into the vertebral body 4. As shown in FIG. 13, rotation of the core member 50 by the tool 102 causes the nut assemblies 70 to retract inside the housing. Retraction of the nut assemblies 70 forces the teeth 98 upward as the flanges 92 slide within the channels 76. As the four separate crown members 90 extend outwardly, the teeth 98 penetrate the vertebral bodies 4.

EX1031) at 5:19-31.

B. <u>Chung (EX1033)</u>

Chung, entitled "A Lumbar Holder," issued September 10, 2002. Chung is prior art to the '319 patent under 35 U.S.C. § 102(b) (Pre-AIA). Chung was not considered by the Examiner during the prosecution.

Chung discloses an intervertebral expandable implant, as best characterized for purposes of this petition by FIGs. 1-4:

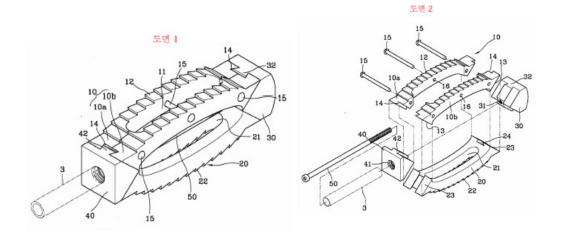

도면 4

EX1033 at FIGs. 1-4.

30-31-32

Chung discloses that:

As illustrated in Figure 1 and Figure 2, "the lumbar holder in accordance with the present design is composed of the holder body (10) that comes into contact with the neighboring back bones (1) into which the aforementioned lumbar holder is to be inserted and the main body of the opposing holder (20), the lead wedge (30) and the opposing wedge (40) in the shape of wedges which are slid between both ends of the aforementioned main holder bodies (10) (20) to narrow or widen the space between the aforementioned main holder bodies (10) (20), and the groove fastening screw (50) that is fastened between the aforementioned lead wedge (30) and the opposing wedge (40) to be tightened or loosened in order to adjust the space between these.

EX1033 at p. 5 (¶ 2)

Chung also discloses that:

...main holder bodies (10) (20) form an arch shape by being positioned facing each other symmetrically, and long penetrating holes (11) (21) through which back bone implant materials can pass through are formed at the center, and sloped guiding surfaces (13) (23) are formed in the diagonal direction on both ends, and dovetail grooves (14) (24) are formed along the aforementioned guiding surfaces (13) (23).

EX1033 at p. 5 (¶ 3)

Chung also discloses that:

...on the outer surface each of the aforementioned main holder bodies (10) (20) that neighbor the back bones (1), one-direction saw tooth (12) (22) sloped toward the aforementioned opposing wedge (40) which is at the rear side, in order to prevent the aforementioned main holder bodies (10)(20) from derailing in the direction opposite to the entrance direction of the aforementioned main holder bodies (10) (20).

EX1033 at p. 5 (¶ 4)

Chung also discloses that:


It is possible to separate the aforementioned wrapper (3) from the aforementioned penetrating hole (41) by rotating in reverse after surgery, and as illustrated in Figure 3 the component enables the operating person to grasp from the outside of the patient's body, and a wrench (2) is inserted through the center hole in order to be able to tighten the groove fastening screw (50).

EX1033 at p. 6 (¶ 3)

C. McLuen (EX1030)

McLuen, entitled "Bone Fusion Device," was published on November 9, 2006 and has an effective filing date of November 3, 2004. McLuen is prior art to the '319 patent under 35 U.S.C. § 102(a) (Pre-AIA). McLuen was not considered by the Examiner during the prosecution.

McLuen discloses an intervertebral expandable implant, as best characterized for purposes of this petition by FIG 16:

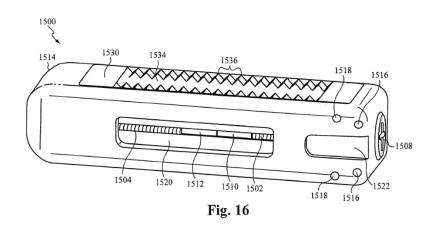

EX1030

McLuen discloses that:

To secure the bone fusion device 1500 in place, a user generally utilizes an implement such as a screw driver to turn the positioning means 1508. Screw drivers unfortunately have the ability to slip out of place. When performing surgery near someone's spine, it is preferable to prevent or at least minimize the slipping ability. To do so, channels 1522 are implemented to receive a tool (not shown). The tool (not shown) has attachments that fit within the channels 1522 to secure the tool (not shown) in place.

EX1030 at [0076].

D. <u>Sutcliffe (EX1032)</u>


Sutcliffe, entitled "Anchorable Vertebral Implant" was published on October

3, 2002 and has an effective filing date of April 2, 2001. Sutcliffe is prior art to the

'319 patent under 35 U.S.C. § 102(b) (Pre-AIA). Sutcliffe was not considered by

the Examiner during the prosecution of the application leading to the '319 patent.

Sutcliffe discloses an intervertebral expandable implant as best characterized for purposes of this petition by FIGs. 3 and 6:

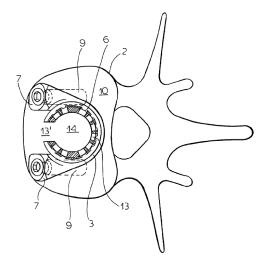



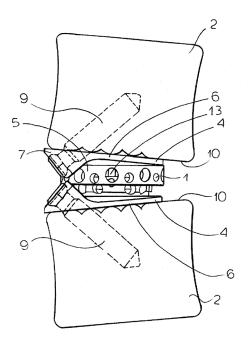


FIG.6

EX1032, FIGs. 3 and 6.

Sutcliffe discloses that:

...lower part 3 is unitarily formed with a pair of eyes 6 having collars 7 defining holes or passages 8 with cylindrical inner surfaces 12 extending at an acute angle of between 25° and 65° to the lower vertebral surface 10, here 45°. Cortical screws 9 extend through these eyes 6 and into the lower vertebra 2 to solidly anchor the lower part 3 to the lower vertebra 2. FIG. 6 shows how a similar pair of eyes 6 can be formed on the upper end part 4 in an arrangement allowing the implant 1 to be installed through a very small surgical opening.

EX1032 at [0024].

IX. GROUND 1: ALLEN IN VIEW OF CHUNG AND MCLUEN RENDER CLAIMS 1-4, 7-9, 11-12, 14-15, AND 18-21 OBVIOUS

As further discussed below, the combination of prior art references meets each

and every element and limitation of the Challenged Claims.


A. <u>Independent Claim 1</u>

[1.1] A system comprising:

a tool assembly which comprises:


a first tool having a first proximal end and a first distal end with a first handle and a gripper,

Allen discloses a tool assembly with a first tool (100) having a first proximal end and a first distal end with a first handle and a gripper (first and second engagement prongs). *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 136.

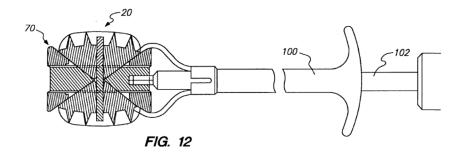


[1.2] the gripper being positioned at the first distal end, cooperating with the first handle, and having first and second engagement prongs positioned at the first distal end,

Allen discloses the gripper being positioned at the first distal end, cooperating with the first handle, and having first and second engagement prongs positioned at the first distal end. *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 137.

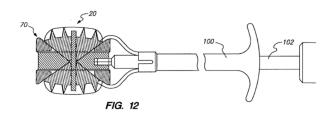


[1.3] wherein the first tool defines an adjusting tool passage through the *first tool; and*

Allen discloses the hollow first tool (100) defines an adjusting tool passage through the first tool. *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 138.

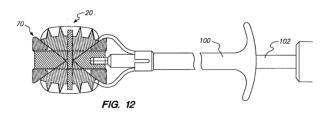

[1.4] a second adjusting tool having a second proximal end and a second distal end with a second handle positioned at the second proximal end,

Allen discloses a second adjusting tool (102) having a second proximal end and a second distal end with a second handle positioned at the second proximal end. *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 139.

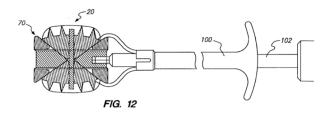


Allen discloses the tool (102) is used to rotate, via a second handle positioned at the second proximal end, an adjusting the screw to extend the implant outwardly. EX1031 at 5:19-47; EX1003 at ¶ 139.

[1.5] a screw engagement portion positioned at the second distal end, and a shaft extending from the second handle to the screw engagement portion,


Allen discloses a screw engagement portion (terminus defining a hex configuration) positioned at the second distal end, and a shaft extending from the second handle to the screw engagement portion. *See e.g.*, EX1031 at 5:19-28; FIG.

12; EX1003 at ¶ 140.

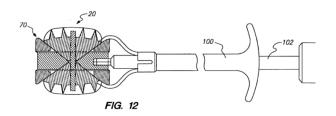

[1.6] wherein the shaft of the second adjusting tool is sized with a smaller diameter than that of the adjusting tool passage such that the second adjusting tool can extend through the adjusting tool passage of the first tool; and

Allen discloses the shaft of the second adjusting tool (102) is sized with a smaller diameter than that of the adjusting tool passage of the first tool (100) such that the second adjusting tool (102) can extend through the adjusting tool passage of the first tool (100). *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 141.

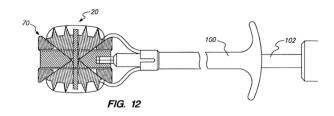


[1.7] an expandable spinal implant sized and configured to be implanted in a human spine, the expandable spinal implant comprising a first expandable spinal implant structure, a second expandable spinal implant structure, and an adjusting screw having a screw head and a threaded portion,

Allen discloses an expandable implant. See e.g., EX1031 at 5:5-47; FIG. 12.

A PHOSITA would have understood that the tool assembly disclosed in Allen is configured to interface with any number of expandable spinal implants. A PHOSITA would have further understood that the tool assembly in Allen is of a typical design for engaging spinal implants and that the tool assembly in Allen could be combined/used with the expandable spinal implant in Allen or in Chung. EX1003 at ¶ 142.

Chung discloses an expandable spinal implant sized and configured to be implanted in a human spine, the expandable spinal implant comprising a first expandable spinal implant structure (10 and 30), a second expandable spinal implant structure (20 and 40), and an adjusting screw (50) having a screw head and a threaded portion. *See, e.g.*, EX1033 at 5 (\P 2-4); FIGs. 1 and 3; EX1003 at \P 143.

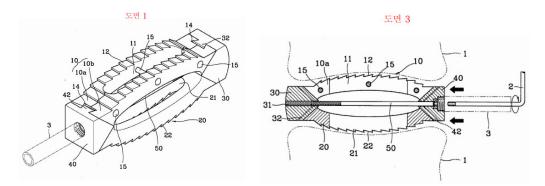


Chung discloses a lumbar holder (expandable spinal implant) composed of the holder body (10) that comes into contact with the vertebrae (1) into which the lumbar holder is inserted and the body of the opposing holder (20), the lead wedge (30) and the opposing wedge (40) which are between both ends of the main holder bodies

(10) (20), to narrow or widen the space between the main holder bodies (10) (20).EX1033 at 5 (¶ 2); FIGs.1-3; EX1003 at ¶ 144.

[1.8] wherein the expandable spinal implant is configured to expand the first expandable spinal implant structure with respect to the second expandable spinal implant structure in response to turning of the adjusting screw,


Chung discloses an expandable spinal implant that is configured to expand the first expandable spinal implant structure (10 and 30) with respect to the second expandable spinal implant structure (20 and 40) in response to turning of the adjusting screw (50). *See, e.g.,* EX1033 at 6 (\P 7); FIGs. 3 and 4; EX1003 at \P 145.

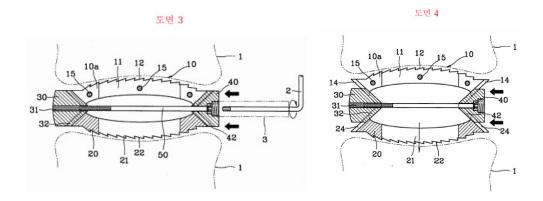


Chung discloses that when fastening screw (50) is turned, both wedges (30) (40) combined with the groove fastening screw (50) slide along the guiding surfaces (13) (23) of main holder bodies (10) (20) and approach each other to push the main holder bodies (10) (20) outward (i.e. expand). EX1033 at 6 (\P 7); FIGs. 3 and 4.

[1.9] wherein the expandable spinal implant defines first and second tool engagement indentations sized and configured for receiving the first and second engagement prongs of the first tool,

Chung discloses the expandable spinal implant defines a tool engagement indentation for engagement of tool (3). *See, e.g.*, EX1033 at 6 ($\P\P$ 2-4); FIGs. 1 and 3. EX1003 at \P 146.

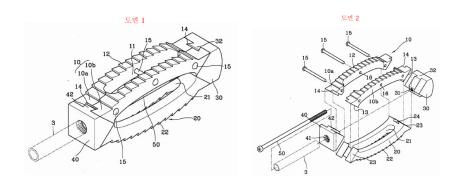



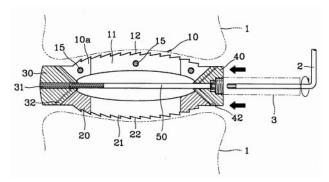


A PHOSITA would have understood that Chung discloses that the opposing wedge (40) has a penetrating hole (41) with a counter bore ("double raised spot structure") that expands to the external side, and on the inner circumference of the large diameter side of the penetrating hole (41), a screw thread ("line") is formed so that a circular pipe tool ("wrapper") (3) can be used by the surgeon to hold and

position the implant. EX1033 at 6 (\P 2-3).

A PHOSITA would have understood that the inserter disclosed by Allen could be used to insert and expand the implant disclosed by Chung. To the extent that the tool disclosed by Allen functions by interfacing with the outside surfaces of the implant, a PHOSITA would have understood that the Chung implant could be modified as a matter of simple substitution to move the doubled raised spot structure from the center of the proximal face to the opposing side surfaces of the implant so that the first and second tool engagement indentations would be positioned at the proximal end of the implant. Stated another way, placement and positioning of indentations for insertion tool engagement at the proximal or trailing end of the implant is a predictable substitution that does not affect its function. EX1003 at ¶ 147.

McLuen discloses an expandable intervertebral implant (e.g. 1500). EX1030 at [0077]; FIG. 16; EX1003 at ¶ 148.

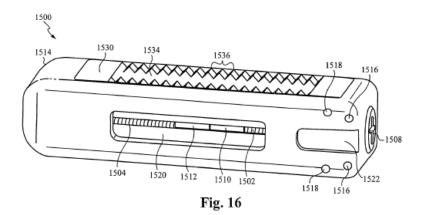


A positioning screw (1508) is located proximate to a proximate end of implant (1500). EX1030 at [0076]; [0077]; FIG. 16. McLuen discloses to secure the implant (1500), a user would generally use a tool such as a screwdriver to turn screw (1508). McLuen also discloses that screwdrivers may slip out of place when performing surgery. Because of the proximity to the patient's spine, it is preferable to prevent or at least minimize slipping. EX1030 at [0076]. To achieve this, McLuen discloses channels or indentations (1522) on opposing sides of the implant to receive a tool. EX1030 at [0076]; FIG. 16; EX1003 at [147.

It would therefore have been obvious to a PHOSITA to combine the teachings of Chung with McLuen to substitute the "double raised spot structure" disclosed in Chung for the indentations in McLuen, moving the tool engagement to opposing sides at the proximal end of the implant to provide the disclosed advantage of prevention or minimization of screw driver slippage. Further, a PHOSITA would have understood that this substitution would increase the ability of the interface to resist torsional moments about the tool axis. This substitution would represent a design choice which would yield predictable results with a reasonable expectation of success. EX1003 at ¶ 149.


> [1.10] wherein the adjusting screw is positioned within the expandable spinal implant in a screw location such that the second adjusting tool can extend through the adjusting tool passage of the first tool to engage the screw head of the adjusting screw while the first and second engagement prongs of the first tool are engaged with the first and

second tool engagement indentations of the expandable spinal implant.

Chung discloses an adjusting screw (50) positioned in the adjusting screw hole (41) of an expandable spinal implant. *See, e.g.*, EX1033 at 6 (\P 4); FIG. 3; EX1003 at \P 150.

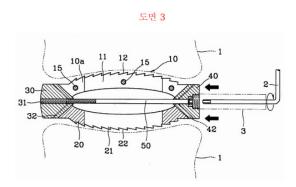


Allen discloses a hollow first tool (100) having a first proximal end and a first distal end with first and second engagement prongs positioned at the first distal end and an adjusting tool passage extending through the first tool from the first proximal end to the first distal end. A tool (102) can be inserted through the insertion tool (100). EX1031 at 5:5-28; FIG 12; EX1003 at ¶ 151.

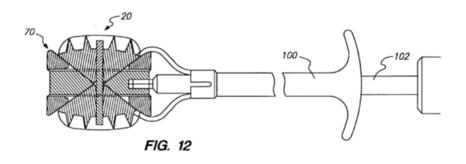

A PHOSITA would have understood that the first and second engagement prongs of the insertion tool (100) are sized and positioned to extend into the first and second tool engagement indentations of a structure (such as the second implant structure (40 and 20) of Chung) to allow the first tool to engage the expandable spinal implant. EX1003 at ¶ 151.

Allen discloses the second adjusting tool (102) can extend through the adjusting tool passage of the first tool (100) to engage the screw head of the adjusting screw (67) while the first and second engagement prongs of the first tool (100) are engaged with the first and second tool engagement indentations of the expandable spinal implant (20). EX1031 at 5:19-28. Allen discloses that following placement of the implant, the tool (102) having a terminus defining a hex configuration is inserted through the hollow insertion tool (100) to engage an adjusting screw. *Id.* at 5:19-28; EX1003 at \P 152.

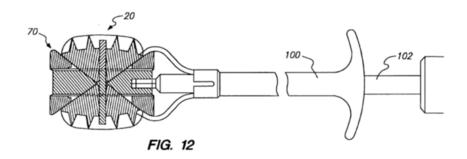

A PHOSITA would have known and understood that orthopedic surgical instruments with cannulated handle bodies, through which instruments and devices could be delivered from the proximal (at the surgeon's hands) to the distal (implantation location) intrasurgical sites, were in common use at the time. Similar devices were also used in arthroscopic and endoscopic surgery. EX1003 at ¶ 153.

It would have been obvious to a PHOSITA to combine/use the first tool of Allen to position the first and second engagement prongs of Allen into the first and second tool engagement indentations of the expandable spinal implant of Chung in combination with McLuen to insert the expandable spinal implant into the disc space between adjacent vertebrae. Then, using the second adjusting tool of Allen to pass through a cannula in a first tool to turn the adjusting screw to expand the implant of Chung. EX1003 at ¶ 154.


2. The system of claim 1,

wherein the screw engagement portion of the second adjusting tool comprises a key for engaging the head of the adjusting screw to turn the adjusting screw and controlling height of the expandable spinal implant.

As discussed above with respect to claim 1, it would have been obvious to a PHOSITA to combine/use the first tool of Allen to position the first and second engagement prongs of Allen into first and second tool engagement indentations of the expandable spinal implant of Chung in combination with McLuen to insert the expandable spinal implant into the disc space between adjacent vertebrae. Then, using the second adjusting tool of Allen to pass through a cannula in a first tool to turn the adjusting screw to expand the implant of Chung. EX1003 at ¶ 155.

Allen discloses the screw engagement portion of the second adjusting tool (102) comprises a key (i.e. terminus with hex configuration) for engaging the head of an adjusting screw to turn the adjusting screw and control the height of the expandable spinal implant (10). EX1031 at 5:5-47; FIG. 12; EX1003 at ¶ 156.

Chung discloses an adjusting screw (50) positioned in the adjusting screw hole (41) of an expandable spinal implant. *See, e.g.,* EX1033 at 6 (¶ 4); FIG. 3. When the fastening screw (50) is turned, both wedges (30) (40) combined with the groove fastening screw (50) slide along the guiding surfaces (13) (23) of main holder bodies (10) (20) and approach each other to push the main holder bodies (10) (20) outward (i.e. control the height of the expandable spinal implant). EX1033 at 6 (¶7); FIGs. 3 and 4; EX1003 at ¶¶ 155 and 157.

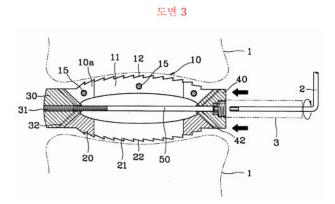


3. The system of claim 1,

wherein the expandable spinal implant defines a longitudinal axis,

wherein the first and second expandable spinal implant structures have first and second angled wedge surfaces that engage one another, wherein the adjusting screw is connected to the second expandable spinal implant structure so as to move the second expandable spinal implant structure along the longitudinal axis and slide the first angled wedge surface with respect to the second angled wedge surface to push the first expandable spinal implant structure in a direction that is substantially away from the longitudinal axis of the expandable spinal implant.

As discussed above with respect to claim 1, it would have been obvious to a PHOSITA to combine/use the first tool of Allen to position the first and second engagement prongs of Allen into the first and second tool engagement indentations of the expandable spinal implant of Chung in combination with McLuen to insert the expandable spinal implant into the disc space between adjacent vertebrae. Then, using the second adjusting tool of Allen to pass through a cannula in a first tool to turn the adjusting screw to expand the implant of Chung. EX1003 at ¶ 158.

Chung discloses the expandable spinal implant defines a longitudinal axis and an adjusting screw (50) connected to the second expandable spinal implant structure (40 and 20) wherein rotation of the adjusting screw (50) with respect to the second expandable spinal implant structure (40 and 20) moves at least a portion of the second implant structure along a longitudinal axis to slide the first angled wedge portion (13) with respect to the second angled wedge portion and expand the intervertebral expandable implant to push the first expandable spinal implant structure (10) in a direction that is substantially away from the longitudinal axis of the expandable spinal implant. See, e.g., EX1033 at 6 ($\P7$); FIGs. 1-4; EX1003 at \P 159.

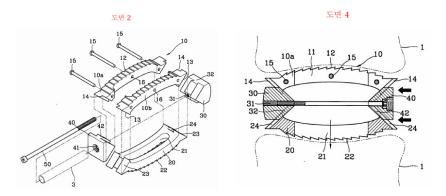

Chung discloses that as fastening screw (50) is turned both wedges (30) (40) combined with the groove fastening screw (50) slide along the guiding surfaces (13) (23) of main holder bodies (10) (20) and approach each other to push the aforementioned main holder bodies (10) (20) outward. EX1033 at 6 (\P 7); FIGs., 2 and 4; EX1003 at \P 160.

A PHOSITA would have therefore understood that the adjusting screw is connected to the second expandable spinal implant structure so as to move the second expandable spinal implant structure along the longitudinal axis and slide the first angled wedge surface with respect to the second angled wedge surface to push the first expandable spinal implant structure in a direction that is substantially away from the longitudinal axis of the expandable spinal implant. A PHOSITA would have therefore understood that Chung in combination with Allen. EX1003 at ¶ 161.

4. The system of claim 1,


wherein the first expandable spinal implant structure defines a first angled wedge portion that comprises a first inwardly-facing rail and a second inwardly-facing rail, wherein a first inwardly-facing slot is defined at a location adjacent the first inwardly-facing rail, wherein a second inwardly-facing slot is defined at a location adjacent the second inwardly-facing rail,

wherein the second expandable spinal implant structure defines a second angled wedge portion that comprises a first outwardly-facing rail and a second outwardly-facing rail that faces outwardly in a direction opposite that of the first outwardly-facing rail, wherein a first outwardly-facing slot is defined at a location adjacent the first outwardly-facing rail, wherein a second outwardly-facing slot is defined at a location adjacent the second outwardly-facing rail,


wherein the first expandable spinal implant structure is slidablyengaged with the second expandable spinal implant structure such that the first angled wedge portion engages the second angled wedge portion with the first inwardly-facing rail of the first expandable spinal implant structure positioned in the first outwardly-facing slot of the second expandable spinal implant structure, the second inwardlyfacing rail of the first expandable spinal implant structure positioned in the second outwardly facing slot of the second expandable spinal implant structure, the first outwardly-facing rail of the second expandable spinal implant structure positioned in the first inwardlyfacing slot of the first expandable spinal implant structure, and the second outwardly-facing rail of the second expandable spinal implant structure positioned in the first inwardlyfacing slot of the first expandable spinal implant structure, and the second outwardly-facing rail of the second expandable spinal implant structure positioned in the second inwardly-facing slot of the first expandable spinal implant structure.

As discussed above with respect to claim 1, Chung discloses a first expandable spinal implant structure (10 and 30) defining a first angled wedge portion (13) having first and second inwardly-facing rails and corresponding adjacent first and second inwardly-facing slots (14). *See, e.g.*, EX1033 at 5 (¶¶ 2-4, 7-8); FIGs. 1 and


2; EX1003 at ¶ 163.

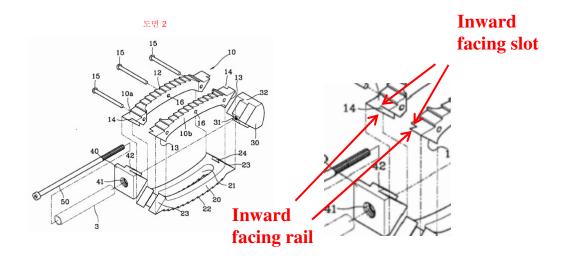


Chung discloses a second expandable spinal implant structure (40 and 20) defining a second angled wedge portion that comprises a first and second outwardly-facing rail that face in a direction opposite to each other and a first and second outwardly facing slot that are adjacent to the first and second outwardly-facing rails, respectively (see below). *See, e.g.*, EX1033 at 5 (\P 2-4, 7-8); FIGs. 1 and 2; EX1003 at \P 164.

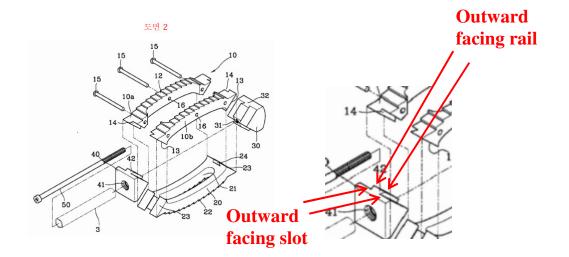

Chung further discloses a first outwardly-facing slot (labeled above) defined at a location adjacent the first outwardly-facing rail (labeled above) and a second outwardly-facing slot (labeled above) is defined at a location adjacent the second outwardly-facing rail (labeled above). A PHOSITA would have understood that the first implant structure (10) is slidably-engaged with the second implant structure (40 and 20) as noted in FIGs. 3 and 4 below. EX1003 at ¶ 164.

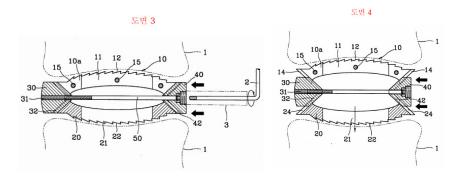

A PHOSITA would have understood that sliding engagement is accomplished by the first angled wedge portion (13) engaging the second angled wedge portion with the first inwardly-facing rail of the first expandable spinal implant structure positioned in the first outwardly-facing slot of the second expandable spinal implant structure, the second inwardly-facing rail of the first expandable spinal implant structure positioned in the second outwardly facing slot of the second expandable spinal implant structure, the first outwardly-facing rail of the second expandable spinal implant structure, the first outwardly-facing rail of the second expandable expandable spinal implant structure, and the second outwardly-facing rail of the second expandable spinal implant structure positioned in the second inwardly-facing slot of the first expandable spinal implant structure, as noted in FIG. 1 below. EX1003 at ¶ 165.



7. A method of using the system of claim 1, the method comprising:

connecting the first tool to the expandable spinal implant with the first and second engagement prongs engaged with the first and second tool engagement indentations;

implanting the expandable spinal implant into a disc space in the human spine via the first tool;

extending the second adjusting tool through the first tool to engage the adjusting screw of the expandable spinal implant; and

expanding the expandable spinal implant by turning the second adjusting tool to turn the adjusting screw of the expandable spinal implant.

As discussed above with respect to claim 1, it would have been obvious to a PHOSITA to combine/use the first tool of Allen to position the first and second engagement prongs of Allen into the first and second tool engagement indentations of the expandable spinal implant of Chung in combination with McLuen, to insert the expandable spinal implant into the disc space between adjacent vertebrae. Then, using the second adjusting tool of Allen to pass through a cannula in a first tool to turn the adjusting screw of Chung to expand the implant of Chung. EX1003 at ¶ 166.

8. The system of claim 1,

and further comprising bone graft material configured to be placed inside and outside of the expandable spinal implant.

Chung discloses that main holder bodies (10) (20) form an arch shape by being positioned facing each other symmetrically, and long penetrating holes (11) (21) through which "back bone implant materials" (i.e. bone graft materials) can pass through are formed at the center between the first and second opposing side surfaces at a first end of the first vertebral body engagement surface. EX1033 at 5 (¶3); FIG. 1. A PHOSITA would also have understood that one would place bone graft material outside the expandable spinal implant, as well. EX1003 at ¶ 167.

Independent Claim 9


[9.1] A system comprising:

a tool assembly comprising:

a first tool having a first proximal end, a first distal end, and a first elongate body between the first proximal end and the first distal end,

Allen discloses a tool assembly including a hollow first tool (100) having a

first proximal end, a first distal end, and a first elongate body between the first proximal end and the first distal end. *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 168.

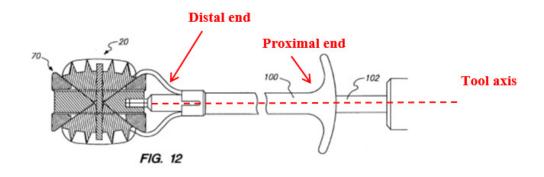


[9.2]wherein the first tool defines a first tool axis from the first proximal end to the first distal end,

Allen discloses a first tool (100) defining a first tool axis from the first proximal end to the first distal end. *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 169.

[9.3] wherein the first tool includes first and second engagement prongs positioned at the first distal end on opposite sides of the first tool axis,

Allen discloses the hollow first tool (100) includes first and second engagement prongs positioned at the first distal end on opposite sides of the first tool axis. *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 169.

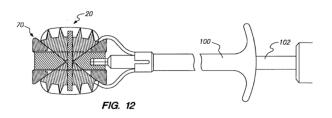


[9.4] wherein the first tool defines an adjusting tool passage through the first tool; and

As discussed above with respect to claim [1.3], Allen discloses all of these

claim elements. EX1003 at ¶ 170.

[9.5] a second adjusting tool having a second proximal end and a second distal end, wherein the second adjusting tool includes a second handle positioned at the second proximal end, a screw engagement portion positioned at the second distal end, and a shaft extending from the second handle to the screw engagement portion,

Allen discloses a second adjusting tool (102) having a second proximal end and a second distal end with a second handle positioned at the second proximal end and a screw engagement portion (a terminus defining a hex configuration) positioned at the second distal end, and a shaft extending from the second handle to the screw engagement portion. *See e.g.*, EX1031 at 5:19-28; FIG 12; EX1003 at ¶ 171.

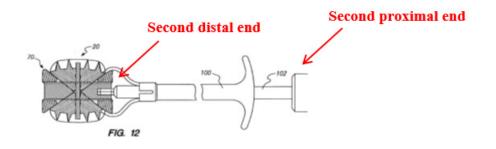

[9.6] wherein the shaft of the second adjusting tool is sized with a smaller diameter than that of the adjusting tool passage such that the second adjusting tool can extend through the adjusting tool passage of the first tool; and

As discussed above with respect to claim [1.6], Allen discloses all of these


claim elements. EX1003 at ¶ 172.

[9.7] an expandable spinal implant sized and configured to be implanted in a human spine, the expandable spinal implant comprising a first expandable spinal implant structure defining a first engagement surface sized and configured to engage a first vertebral body, a second expandable spinal implant structure defining a second engagement surface sized and configured to engage a second vertebral body, and an adjusting screw having a screw head and a threaded shaft,

Allen discloses an expandable implant. See e.g., EX1031 at 5:5-47; FIG 12.

A PHOSITA would have understood that the tool assembly disclosed in Allen is configured to interface with any number of expandable spinal implants. A PHOSITA would have further understood that the tool assembly in Allen is of a typical design for engaging spinal implants and the tool assembly in Allen could be combined/used with the expandable spinal implant in Allen or in Chung. EX1003 at ¶ 173.

Chung discloses an expandable spinal implant sized and configured to be implanted in a human spine, the expandable spinal implant comprising a first expandable spinal implant structure (10 and 30) defining a first engagement surface sized and configured to engage a vertebral body (unlabeled, see ridges (12)), a second expandable spinal implant structure (20 and 40) defining a second engagement surface sized and configured to engage a vertebral body (unlabeled, see ridges (22)), and an adjusting screw (50) having a screw head and a threaded shaft. *See, e.g.,* EX1033 at 5 (\P 2-4); FIGs. 1 and 3; EX1003 at \P 174.

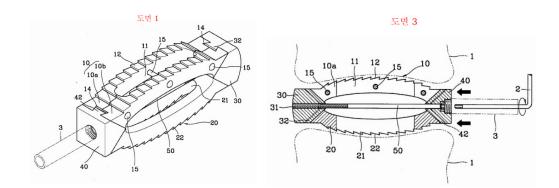

[9.8] wherein the expandable spinal implant is configured to expand the first expandable spinal implant structure with respect to the second expandable spinal implant structure in response to turning of the adjusting screw,

As discussed above with respect to claim [1.8], Chung discloses all of these

claim elements. EX1003 at ¶ 175.

[9.9] wherein the expandable spinal implant defines first and second tool engagement indentations sized and configured for receiving the first and second engagement prongs of the first tool,

As discussed above with respect to claim [1.9], Chung in combination with

McLuen discloses this claim element. EX1003 at ¶ 176.

[9.10] wherein the adjusting screw is positioned within the expandable spinal implant in a screw location such that the second adjusting tool

can extend through the adjusting tool passage of the first tool to engage the screw head of the adjusting screw while the first and second engagement prongs of the first tool are engaged with the first and second tool engagement indentations of the expandable spinal implant.

As discussed above in Claim 1, Allen and Chung disclose this claim element.

EX1003 at ¶ 176.

11. The system of claim 9,

wherein the expandable spinal implant comprises first and second angled wedge surfaces, wherein rotation of the adjustment screw by the second adjusting tool drives relative motion of the first angled wedge surface with respect to the second angled wedge surface to expand the expandable spinal implant.

Chung discloses the expandable spinal implant and an adjusting screw (50) connected to the second expandable spinal implant structure (40 and 20) wherein rotation of the adjusting screw (50) moves at least a portion of the second implant structure along a longitudinal axis to slide the first angled wedge portion (13) with respect to the second angled wedge portion and expand the intervertebral expandable implant. *See, e.g.*, EX1033 at 6 (\P 7); FIGs. 1-4; EX1003 at \P 177.

It would have been obvious to a PHOSITA to combine/use the first tool (100) of Allen to position the first and second engagement prongs of Allen into the first and second tool engagement indentations of the expandable spinal implant of Chung in combination with McLuen to insert the expandable spinal implant into the disc space between adjacent vertebrae. Then, using the second adjusting tool (102) of

Allen to pass through a cannula in a first tool to turn the adjusting screw (50) of Chung to expand the implant of Chung. EX1003 at ¶ 178.


12. The system of claim 9,

wherein the first expandable spinal implant structure defines an end gap between the first and second opposing side surfaces at a first end of the first vertebral body engagement surface,

wherein the first vertebral body engagement surface comprises a plurality of ridges extending from the first vertebral body engagement surface,

wherein at least some of the ridges are positioned on the first vertebral body engagement surface on opposite sides of the end gap.

Chung discloses the first expandable spinal implant structure (10) defines first and second opposing side surfaces positioned on opposite sides of the first vertebral body engagement surface. The first implant structure defines an end gap (11) between the first and second opposing side surfaces at a first end of the first vertebral body engagement surface. *See, e.g.*, EX1033 at 5 (\P 2-4); FIG 1.

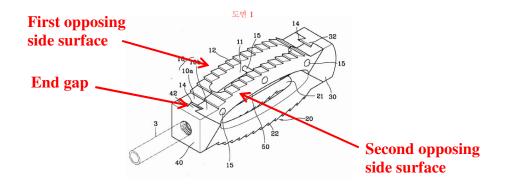

Chung discloses that the first vertebral body engagement surface comprises a plurality of ridges (12) extending from the first vertebral body engagement surface, at least some of the ridges are positioned on the first vertebral body engagement surface on opposite sides of the end gap (11). *See, e.g.*, EX1033 at 5 (\P 4); FIG. 1.


14. The system of claim 9,

wherein a distal end of the adjusting screw has a distal diameter, wherein the head of the adjusting screw has a head diameter, and wherein the distal diameter is larger than the head diameter.

Chung discloses an expandable implant that includes fastening screw (50). See, e.g., EX1033 at 6 (\P 4); FIG. 3. When screw (50) is tightened, both wedges (30) (40) combined with the groove fastening screw (50) slide along the guiding surfaces (13) (23) of main holder bodies (10) (20) and approach each other to push the main holder bodies (10) (20) outward (i.e. expand). EX1033 at 6 (\P 7); FIGs. 3 and 4; EX1003 at \P 180.

Allen discloses an expandable spinal implant (20) with internally threaded nut assemblies (70) threaded onto a core member (50) which has left and right-hand threads ("oppositely wound") on each half of its length. EX1031 at 4:28-49; FIG. 11. The nut assemblies (70) engage crown members (vertebral body engagement surfaces) (90) via dovetail joints (74, 76, 92, 94) along angled wedge portions (e.g. 74). *Id.* at 4:50-58; FIGs. 8, 10A, 10B. As the core member (50) is rotated using a

tool (102) that engages a terminus defining a hex configuration, the nut assemblies (70) retract into the housing, forcing crown members (90) outward, causing teeth (98) to penetrate vertebral bodies (4). EX1031 at 5:18-31; FIGs. 11-13; EX1003 at ¶ 181.

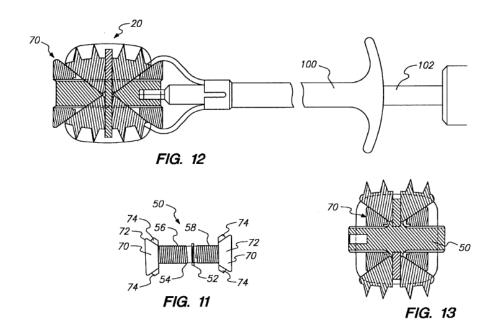


A PHOSITA would have understood that the implant disclosed by Chung could be modified by using the screw configuration disclosed by Allen. This would have the advantage of doubling the distance of expansion of the implant for the same amount of travel of wedge (30) on the screw, thereby doubling the potential expansion of the implant. Therefore, a PHOSITA would have been motivated to combine the teachings of Chung and Allen, The combination, using known methods, would yield the predictable result of increasing implant expansion. A PHOSITA would have also understood that a resulting head diameter would include a minor thread diameter and a resulting distal diameter would include a major thread diameter. EX1003 at ¶ 182.

15. The system of claim 9,

wherein the first tool comprises a first handle positioned proximate the first proximal end and extending in a direction that is substantially perpendicular to the first proximal axis,


wherein the second handle of the second adjusting tool is substantially circular when viewed along the first proximal axis when the second adjusting tool is positioned in the adjusting tool passage.

Allen discloses a first tool (100) having a first handle positioned proximate the first proximal end and extending in a direction that is substantially perpendicular to the first proximal axis. EX1031 at 5:19-26; EX1003 at ¶ 183.

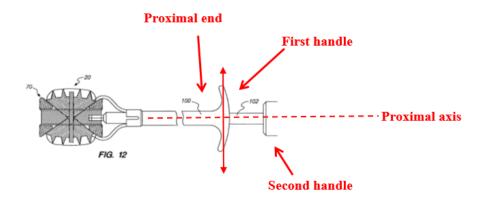

Allen discloses the tool (102) is inserted through the hollow insertion tool (100) to engage an adjusting screw. The second handle of the second adjusting tool

is substantially circular when viewed along the first proximal axis when the second adjusting tool is positioned in the adjusting tool passage. EX1031 at 5:19-28; EX1003 at ¶ 183.

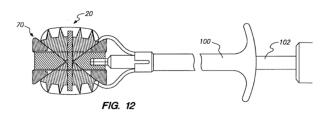


18. The system of claim 9,

wherein the first tool indentation extends into a first side of the expandable spinal implant with a first substantially rectangular shape as viewed from a direction perpendicular to the first side and the second tool indentation extends into a second side of the expandable spinal implant with a second substantially rectangular shape as viewed from a direction perpendicular to the second side.

As discussed above with respect to claims 1 and 9, Chung discloses the expandable spinal implant defines a tool engagement indentation for engagement of tool (3). *See, e.g.*, EX1033 at 6 (¶¶ 2-4); FIGs. 1 and 3. A PHOSITA would have understood that Chung discloses that the opposing wedge (40) has a penetrating hole (41) with a counter bore ("double raised spot structure") that expands to the external side, and on the inner circumference of the large diameter side of the aforementioned penetrating hole (41), a screw thread ("line") is formed so that a circular pipe tool ("wrapper") (3) can be used by the surgeon to hold and position the implant. *Id.* at 6 (\P 2-3); EX1003 at \P 184.

To the extent that Chung does not disclose substantially rectangular shaped indentations, it would have been obvious to PHOSITA as a matter of simple substitution to modify the implant disclosed to move the indentations from one end (40) to opposing sides. Stated another way, placement and positioning of substantially rectangular shaped indentations for insertion tool engagement at the end of the expandable spinal implant is a predictable substitution that does not affect its function. EX1003 at ¶ 185.

McLuen discloses an expandable spinal implant (e.g. 1500). EX1030 at [0077]; FIG. 16; EX1003 at [186.

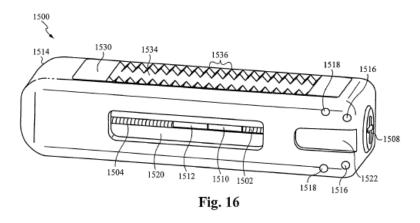

A positioning screw (1508) is located proximate to a proximate end of implant (1500). EX1030 at [0076]; [0077]; FIG. 16. McLuen discloses to secure the implant (1500), a user would generally use a tool such as a screwdriver to turn screw (1508). McLuen also discloses that screwdrivers may slip out of place when performing surgery. Because of the proximity to the patient's spine, it is preferable to prevent or at least minimize slipping. EX1030 at [0076]. To do so, McLuen discloses channels

or indentations (1522) that are substantially rectangular in shape on opposing sides of the implant to receive a tool. EX1030 at [0076]; FIG. 16; EX1003 at [186.

It would therefore have been obvious to a PHOSITA to combine the teachings of Chung with McLuen to substitute the "double raised spot structure" disclosed in Chung for the indentations in McLuen, moving the engagement to opposing sides at the proximal end of the implant to provide the disclosed advantage of prevention or minimization of screw driver slippage. Further, a PHOSITA would have understood that this substitution would increase the ability of the interface to resist torsional moments about the tool axis. This substitution would represent a design choice which would yield a predictable result with a reasonable expectation of success. EX1003 at ¶ 187.

19. A method of using the system of claim 9, the method comprising:

connecting the first tool to the expandable spinal implant with the first and second engagement prongs engaged with the first and second tool engagement indentations;

implanting the expandable spinal implant into a disc space in the human spine via the first tool;

extending the second adjusting tool through the first tool to engage the adjusting screw of the expandable spinal implant; and

expanding the expandable spinal implant by turning the second adjusting tool to turn the adjusting screw of the expandable spinal implant. As discussed above with respect to claims 7 and 9, it would have been obvious to a PHOSITA to combine/use the first tool of Allen to position the first and second engagement prongs of Allen into the first and second tool engagement indentations of the expandable spinal implant of Chung in combination with McLuen to insert the expandable spinal implant into the disk space between adjacent vertebrae and to use the second adjusting tool of Allen to pass through a cannula in a first tool to turn the adjusting screw to expand the implant of Chung. EX1003 at ¶ 188.

Independent Claim 20


[20.1] A system comprising:

a tool assembly comprising:

a first tool having a first proximal end, a first distal end, and a first elongate body between the first proximal end and the first distal end,

wherein the first tool defines a first tool axis from the first proximal end to the first distal end,

If the preamble is a limitation, Allen discloses a first tool (100) having a first proximal end, a first distal end, and a first elongate body between the first proximal end and the first distal end, the first tool defining a first tool axis from the first proximal end to the first distal end. *See e.g.*, EX1031 at 5:19-28; FIG 12; EX1003 at \P 189.

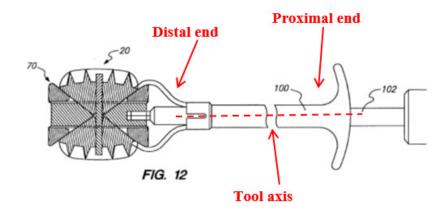

[20.2] wherein the first tool includes a gripper having one or more engagement prongs positioned at the first distal end axially offset from the first tool axis,


wherein the first tool defines an adjusting tool passage through the first tool; and

a second adjusting tool having a second proximal end and a second distal end, wherein the second adjusting tool includes a screw engagement portion positioned at the second distal end and a shaft extending from the second proximal end to the screw engagement portion,

wherein the shaft of the second adjusting tool is sized with a smaller diameter than that of the adjusting tool passage such that the second adjusting tool can extend through and turn within the adjusting tool passage of the first tool; and


Allen discloses a first tool (100) defining a first tool axis from the first proximal end to the first distal end. EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 189.

Allen discloses a first hollow tool (100) defining as adjusting tool passage and having a gripper having one or more engagement prongs positioned at the first distal end axially offset from the first tool axis. EX1031 at 5:19-28; FIG. 12; EX1003 at ¶

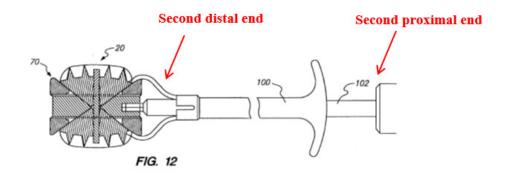

Allen discloses a second adjusting tool (102) having a second proximal end and a second distal end, with a screw engagement portion (a terminus defining a hex configuration) positioned at the second distal end, and a shaft extending from the second proximal end to the screw engagement portion. *See e.g.*, EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 190.


Allen discloses the second adjusting tool (102) having a terminus defining a hex configuration is inserted through the adjusting tool passage of the insertion tool (100) to engage an adjusting screw. The shaft of the second adjusting tool (102) is sized with a smaller diameter than that of the adjusting tool passage such that the second adjusting tool (102) can turn within the adjusting tool passage of the first tool (100 via a second handle positioned at the second proximal end for adjusting screw to extend the implant outwardly. EX1031 at 5:19-28; EX1003 at ¶ 190.

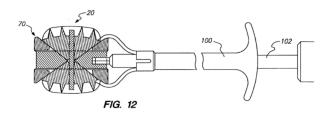

[20.3] an expandable spinal implant sized and configured to be implanted in a human spine, the expandable spinal implant comprising a first expandable spinal implant structure defining a first engagement surface sized and configured to engage a first vertebral body, a second expandable spinal implant structure defining a second engagement surface sized and configured to engage a second vertebral body, and an adjusting screw having a screw engagement portion and a threaded portion,

Chung discloses an expandable spinal implant sized and configured to be implanted in a human spine, the expandable spinal implant comprising a first expandable spinal implant structure (10 and 30) defining a first engagement surface sized and configured to engage a vertebral body (unlabeled, see ridges (12)), a second expandable spinal implant structure (20 and 40) defining a second engagement surface sized and configured to engage a vertebral body (unlabeled, see ridges (22)), and an adjusting screw (50) having a screw head with an engagement portion and a threaded portion. *See, e.g.,* EX1033 at 5 ($\P\P$ 2-4); FIGs. 1 and 3; EX1003 at \P 191.

[20.4]wherein the expandable spinal implant is configured to expand the first expandable spinal implant structure with respect to the second expandable spinal implant structure in response to turning of the adjusting screw, Chung discloses rotation of the adjusting screw (50) with respect to the first implant structure (10 and 30) moves the first expandable spinal implant structure with respect to the second expandable spinal implant structure (40 and 20) to slide the first angled wedge portion (13) with respect to the second angled wedge portion and expand the expandable spinal implant structure. *See, e.g.*, EX1033 at 6 (¶¶6-8); FIGs. 2 and 4; EX1003 at ¶ 193.

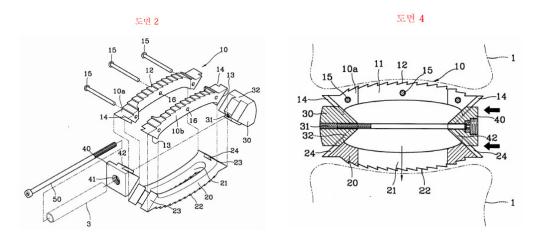



Chung discloses that as fastening screw (50) is tightened, both wedges (30) (40) combined with the groove fastening screw (50) slide along the guiding surfaces (13) (23) of main holder bodies (10) (20) and approach each other to push the aforementioned main holder bodies (10) (20) outward. EX1033 at 6 (\P 7); FIGs 2 and 4; EX1003 at \P 193.

[20.5] wherein the expandable spinal implant defines one or more tool engagement indentations sized and configured for engaging with the gripper of the first tool,

Chung discloses the expandable spinal implant defines a tool engagement

indentation for engagement of tool (3). *See, e.g.*, EX1033 at 6 (¶¶ 2-4); FIGs. 1 and 3. A PHOSITA would have understood that Chung discloses that the opposing wedge (40) has a penetrating hole (41) with a counter bore ("double raised spot structure") that expands to the external side, and on the inner circumference of the large diameter side of the aforementioned penetrating hole (41), a screw thread ("line") is formed so that a circular pipe tool ("wrapper") (3) can be used by the surgeon to hold and position the implant. *Id.* at 6 (¶ 2-3); EX1003 at ¶ 194.

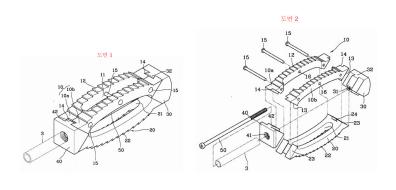




A PHOSITA would have understood that the inserter disclosed by Allen could be used to insert and expand the implant disclosed by Chung. To the extent that the tool disclosed by Allen functions by interfacing with the outside surfaces of the implant, a PHOSITA would have understood that the implant could be modified as a matter of simple substitution to move the inserter indentation from the center of

the proximal face to the opposing side surfaces of the implant so that the first and second tool engagement indentations would be positioned at the proximal end of the implant. Stated another way, placement and positioning of indentations for insertion tool engagement at the proximal or trailing end of the implant is a predictable substitution that does not affect its function. EX1003 at ¶ 195.


McLuen discloses an expandable intervertebral implant (e.g. 1500). EX1030 at [0077]; FIG. 16. A positioning screw (1508) is located proximate to a proximate end of implant (1500). EX1030 at [0076]; [0077]; FIG. 16. McLuen discloses to secure the implant (1500), a user would generally use a tool such as a screwdriver to turn screw (1508). McLuen also discloses that screwdrivers may slip out of place when performing surgery. Because of the proximity to the patient's spine, it is preferable to prevent or at least minimize slipping. EX1030 at [0076]. To achieve this, McLuen discloses channels or indentations (1522) on opposing sides of the implant to receive a tool. EX1030 at [0076]; FIG. 16; EX1003 at ¶ 196.

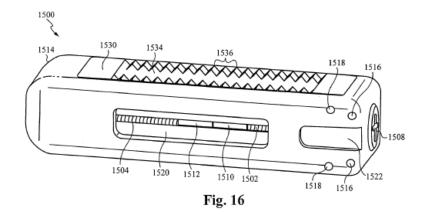

It would therefore have been obvious to a PHOSITA to combine the teachings of Chung with McLuen to substitute the "double raised spot structure" disclosed in Chung for the indentations in McLuen, moving the engagement to opposing sides at the proximal end of the implant to provide the disclosed advantage of prevention or minimization of screw driver slippage. Further, a PHOSITA would have understood that this substitution would increase the ability of the interface to resist torsional moments about the tool axis. This substitution would represent a design choice which would yield predictable results with a reasonable expectation of success. EX1003 at ¶ 197.

> [20.6] wherein the adjusting screw is positioned within the expandable spinal implant in a screw location such that the second adjusting tool can extend through the adjusting tool passage of the first tool to engage the screw engagement portion of the adjusting screw while one or more engagement prongs of the first tool are engaged with the one or more engagement indentations of the expandable spinal implant,


Chung discloses an adjusting screw (50) positioned in the adjusting screw hole (41) in an expandable spinal implant. *See, e.g.*, EX1033 at 6 (\P 4); FIG3; EX1003 at \P 198.

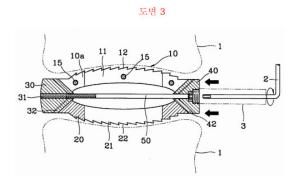

Allen discloses a hollow first tool (100) having a first proximal end and a first distal end with first and second engagement prongs positioned at the first distal end and an adjusting tool passage extending through the first tool from the first proximal end to the first distal end. EX1031 at 5:5-26; FIG 12; EX1003 at ¶ 199.

A PHOSITA would have understood that the first and second engagement prongs of the insertion tool (100) are sized and positioned to extend into the first and second tool engagement indentations to allow the first tool to engage the expandable spinal implant. EX1003 at ¶ 199.

Allen discloses the second adjusting tool (102) can extend through the adjusting tool passage of the first tool (100) to engage the screw head of an adjusting screw while the engagement prongs of the first tool (100) are engaged with the tool engagement indentations of the expandable spinal implant. EX1031 at 5:19-28; FIG. 12; EX1003 at ¶ 199.

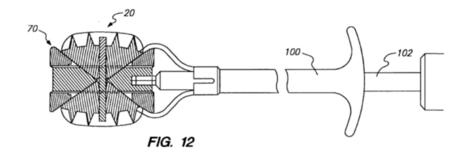

A PHOSITA would have known and understood that orthopedic surgical instruments with cannulated handles bodies, through which instruments and devices could be delivered from the proximal (at the surgeon's hands) to the distal (implantation location) intrasurgical sites, were in common use at that time. Similar devices were also used in arthroscopic and endoscopic surgery. EX1003 at ¶ 200.


It would have been obvious to a PHOSITA to combine/use the first tool of Allen to position the first and second engagement prongs of Allen into the first and second tool engagement indentations of the expandable spinal implant of Chung in combination with McLuen, to insert the expandable implant into the disk space between adjacent vertebrae. Then, using the second adjusting tool of Allen to pass through a cannula in a first tool to turn the adjusting screw to expand the implant of Chung. EX1003 at ¶ 200.

[20.7] wherein at least one of the one or more engagement indentations of the expandable spinal implant is positioned on one or more side surfaces of the expandable spinal implant such that the one or more engagement prongs of the gripper is positioned on the one or more side surfaces of the expandable spinal implant when the first tool is engages with the expandable spinal implant. As discussed above, a PHOSITA would have understood that the tool assembly disclosed in Allen is configured to interface with any number of expandable spinal implants. A PHOSITA would have further understood the tool assembly in Allen is of a typical design for engaging spinal implants and that the tool assembly in Allen could be combined/used with the expandable spinal implant in Allen. EX1003 at ¶ 201.


Additionally as discussed above, it would have been obvious to a PHOSITA to combine the teachings of Chung with McLuen to modify the indentation disclosed in Chung as disclosed in McLuen, moving the indentation from the hole (41) to positions on opposing sides of the expandable spinal implant to provide the disclosed advantages of prevention or minimization of screw driver slippage. Further, a PHOSITA would have understood that this substitution would increase the ability of the interface to resist torsional moments about the tool axis. This substitution would represent a design choice which would yield predictable results with a reasonable expectation of success. EX1003 at ¶ 202.

21. The system of claim 20, wherein the expandable spinal implant comprises a substantially cylindrical side hole extending through a side of the expandable spinal implant into an interior cavity of the expandable spinal implant and is sized and configured to allow for bone placement through the side hole into the interior cavity, wherein the expandable spinal implant comprises an angled wedge portion having rails and slots configured to allow for relative movement and expansion of the expandable spinal implant during expansion of the expandable spinal implant.

A PHOSITA would have understood that Chung discloses the main holder bodies (10) (20) form an arch shape by being positioned facing each other symmetrically, and long penetrating holes (11 and 21) (i.e. cavities to allow for bone placement) are formed in the center through which bone implant materials can pass are formed at the center. *See, e.g.*, EX1033 at 5 (¶ 3); FIG 1. A PHOSITA would also have understood that the arch shape formed by main holder bodies (10)(20) also constitutes a side hole through which material such as bone graft could be placed. EX1003 at ¶ 203.



Chung discloses the expandable spinal implant having the first angled wedge portion (13) having rails and slots with respect to the second angled wedge portion having rails and slots configured to allow for relative movement and expansion of the expandable spinal implant during expansion of the expandable spinal implant. *See, e.g.*, EX1033 at 5(\P 7); 6 (\P 7); FIGs. 2 and 4; EX1003 at \P 203.

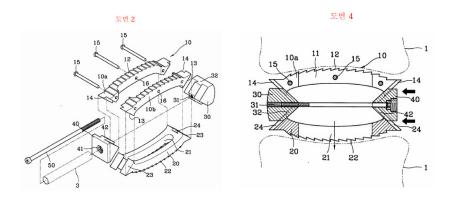

A PHOSITA would have understood that Chung discloses a hole extending through at least one side of the expandable spinal implant into an interior cavity of the expandable spinal implant that is sized and configured to allow for bone placement through the side hole into the interior cavity. It would have been obvious to a PHOSITA that the specific shape (i.e. cylindrical, square, etc.) of the hole would have been a simple design choice with no bearing on the hole's function of admitting bone and/or graft material into the interior of the implant. EX1003 at ¶ 204.

In summary, as confirmed by Dr. Ochoa, Allen in view of Chung in view of McLuen renders claims 1 and 5-11 unpatentable as obvious under 35 U.S.C. § 103.

X. GROUND 2: ALLEN IN VIEW OF CHUNG, IN VIEW OF McLUEN, AND IN FURTHER VIEW OF SUTCLIFFE RENDER CLAIM 5 OBVIOUS

As further discussed below, Allen in view of Chung and McLuen, as already discussed above, in further view of Sutcliffe, teaches each and every element and limitation of the dependent claim 5.

5. The system of claim 1,

and further comprising first and second anchors, wherein the expandable spinal implant comprises first and second anchor guides angled to guide the first and second anchors bidirectionally into first and second vertebral bodies.

Sutcliffe discloses an expandable intervertebral implant (1). EX1032 at [0022]. Sutcliffe discloses a lower part (3) is unitarily formed with a pair of eyes (6) having collars (7) defining holes or passages (8) with cylindrical inner surfaces (12) extending at an acute angle of between 25° and 65° to the lower vertebral surface (10). Cortical screws (9) extend through these eyes (6) and into the lower vertebra (2) to solidly anchor the lower part (3) to the inferior vertebra (2). Similar pair of eyes (6) can be formed on the upper end part (4) to anchor it to the superior vertebra. *Id.* at [0024]; FIG. 6. One or more through-going holes (13) are present in upper and lower parts (3) and (4). *Id.* at [0023]; FIG. 6. EX1003 at ¶ 205.

A PHOSITA have understood that collars (7) defining holes or passages (8) serve as first and second anchor guides that constrain the position and direction of anchors (9) into the superior and inferior intervertebral bodies. EX1003 at ¶ 205.

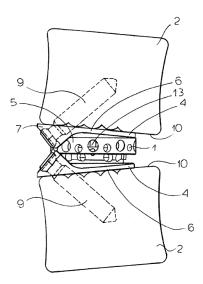


FIG.6

A PHOSITA would have understood that the implant disclosed by Chung could have been readily modified to incorporate the angulated passages and anchors (screws) disclosed by Sutcliffe. A PHOSITA would have understood that the bone screws provide enhanced fixation for the implant, providing additional security to prevent dislodgement of the implant. Therefore, a PHOSITA would have understood that Chung in combination with Sutcliffe would disclose first and second anchor guides angled to guide the first and second anchors bidirectionally into first and second vertebral bodies. EX1003 at ¶ 206.

XI. THIS PETITION SHOULD NOT BE DISCRETIONARILY DENIED

Patent Owner may argue that this Petition should be discretionarily denied

under 35 U.S.C. § 314(a) in view of the Pending Litigation, based on *NHK Spring*⁵ and its progeny. Any such argument by Patent Owner should be rejected for several reasons.

First, Lex Machina reports that the median number of days to trial in the EDPA for patent cases is 867 days. EX 1036. The Pending Litigation however involves eight asserted patents, one hundred and thirty-one asserted claims and twenty three accused products. The Pending Litigation needs to go through full fact discovery, Markman, expert discovery, summary judgment and trial. This will require significantly more than the median of 867 days to address the number of claims and products, not to mention the Pending Litigation enters the queue behind all other cases that are on Judge Goldberg's docket, even those subsequently filed, and at a time when many cases are delayed because of COVID-19. The expectation is for a trial date in 2022/2023.⁶

Second, the most likely scenario is that a final decision will issue before and perhaps well before trial in the EDPA. Any appeal of a final decision would, at best, overlap with any appeal of the District Court decision. The Federal Circuit may consolidate such appeals, and enable the decision of this Board to impact the final

⁵ *NHK Spring Co. v. Intri-Plex Techs., Inc.,* IPR2018-00752, Paper 8 (PTAB Sept. 12, 2018).

⁶ Globus intends on filing a Motion for Stay in the Pending Litigation.

outcome of the District Court case. Either way, any remand from appeal to the EDPA would delay the conclusion of the District Court action by years.

Third, Congressional intent militates against discretionary denial. Through 35 U.S.C. § 315(b), Congress established a one-year bar to file a petition for inter parties review after service of a complaint. In so doing, Congress was intending to "afford defendants a reasonable opportunity to identify and understand the patent claims that are relevant to the litigation." 157 Cong. Rec. S5429 (daily ed. Sept. 8, 2011). Indeed, as is the case here, "[h]igh-technology companies . . . are often sued by [patent owners] asserting multiple patents with large numbers of vague claims, making it difficult to determine in the first few months of the litigation which claims will be relevant and how those claims are alleged to read on the defendant's products." Id. Thus, it would be unfair—and in clear contravention of legislative intent—to refuse Petitioner access to the efficiencies intended through this forum.

XII. CONCLUSION

Petitioner has demonstrated in this Petition that the Challenged Claims are unpatentable. Petitioner, therefore, respectfully requests institution of an IPR of the '319 patent. Dated: July 20, 2020

By: / George D. Moustakas / George D. Moustakas, Reg. No. 44,425 (gdmoustakas@hdp.com) David P. Utykanski, Reg. No. 39,052 (dutykanski@hdp.com) Harness, Dickey & Pierce, PLC 5445 Corporate Dr., Suite 200 Troy, MI 48098 Telephone: (248) 641-1600 Facsimile: (248) 641-0270

Attorneys for Petitioner, Globus Medical, Inc.

CERTIFICATE OF COMPLIANCE

The undersigned hereby certifies that this Petition complies with the word count limitations of 37 C.F.R. § 42.24. This brief contains less than 14,000 words permitted under 37 C.F.R. § 42.24(a)(1)(i). In accordance with 37 C.F.R. 42.24(a), this word count does not include table of contents, table of authorities, mandatory notices under §42.8, certificate of service or word count, or appendix of exhibits or claim listing.

Petitioner relies on the word count feature of the word-processing system used to prepare this paper.

By: / George D. Moustakas / George D. Moustakas, Reg. No. 44,425 (gdmoustakas@hdp.com) David P. Utykanski, Reg. No. 39,052 (dutykanski@hdp.com) Harness, Dickey & Pierce, PLC 5445 Corporate Dr., Suite 200 Troy, MI 48098 Telephone: (248) 641-1600 Facsimile: (248) 641-0270

Attorneys for Petitioner, Globus Medical, Inc.

CERTIFICATE OF SERVICE

Pursuant to 37 C.F.R. §§42.6(e) and 42.105, this is to certify that I caused a true, correct and complete copy of the PETITION FOR INTER PARTES REVIEW OF U.S. PATENT NO. 8,353,913 PURSUANT TO 35 U.S.C. §§ 311–319 AND 37 C.F.R. § 42 and related documents to be served via electronic mail and FedEx, next day delivery, on the Patent Owner, on this 20th day of June, 2020:

Fish & Richardson, P.C. P. O. Box 1022 Minneapolis, MN 55440-1022

> By: / George D. Moustakas / George D. Moustakas, Reg. No. 44,425 (gdmoustakas@hdp.com) David P. Utykanski, Reg. No. 39,052 (dutykanski@hdp.com) Harness, Dickey & Pierce, PLC 5445 Corporate Dr., Suite 200 Troy, MI 48098 Telephone: (248) 641-1600 Facsimile: (248) 641-0270

> > Attorneys for Petitioner, Globus Medical, Inc.

24712461.1