



US009078713B2

(12) **United States Patent**
Prandi et al.

(10) **Patent No.:** **US 9,078,713 B2**

(45) **Date of Patent:** ***Jul. 14, 2015**

(54) **ORTHOPEDIC IMPLANT IN THE FORM OF A PLATE TO BE FIXED BETWEEN TWO BONE PARTS**

(71) Applicant: **MEMOMETAL TECHNOLOGIES**,
Bruz (FR)

(72) Inventors: **Bernard Prandi**, Rennes (FR); **Keith Wapner**, Philadelphia, PA (US);
Charles P. Wapner, Media, PA (US);
Peter W. Wapner, Media, PA (US)

(73) Assignee: **MEMOMETAL TECHNOLOGIES**
(FR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 88 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/041,706**

(22) Filed: **Sep. 30, 2013**

(65) **Prior Publication Data**

US 2014/0052193 A1 Feb. 20, 2014

Related U.S. Application Data

(63) Continuation of application No. 12/918,071, filed as application No. PCT/FR2009/051879 on Oct. 2, 2009, now Pat. No. 8,556,946.

(30) **Foreign Application Priority Data**

Oct. 2, 2008 (FR) 08 56694

(51) **Int. Cl.**

A61B 17/80 (2006.01)

A61B 17/84 (2006.01)

(52) **U.S. Cl.**

CPC **A61B 17/8061** (2013.01); **A61B 17/8004** (2013.01); **A61B 17/808** (2013.01); **A61B 17/8057** (2013.01); **A61B 17/846** (2013.01); **A61B 17/809** (2013.01)

(58) **Field of Classification Search**

CPC .. A61B 17/80; A61B 17/808; A61B 17/8057; A61B 17/8061

USPC 606/60, 280–299, 300–331
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,486,303 A 10/1949 Longfellow

3,528,085 A 9/1970 Reynolds

(Continued)

FOREIGN PATENT DOCUMENTS

DE 3027148 A1 12/1981

DE 8227727 U1 12/1982

(Continued)

OTHER PUBLICATIONS

Catalogue General 1987-1988, plaques d'ostéosynthese, bone plates, Division of Pfizer Hospital Products Group, Bagneux, France.

(Continued)


Primary Examiner — Christopher Beccia

(74) *Attorney, Agent, or Firm* — Lerner, David, Littenberg, Krumholz & Mentlik, LLP

(57) **ABSTRACT**

The invention relates to a plate fixed between two bone parts by way of screws engaged in holes formed in the thickness of said plate. The plate comprises an angled member or rib which is inclined according to an angle of between about 30° and 60° in relation to the plane defined by the plate. The angled member or rib has a hole for engaging a screw and is located in the central part of the width, over a determined part of the length of the plate, so that the screw brings the two bone parts into a compressive position.

40 Claims, 2 Drawing Sheets

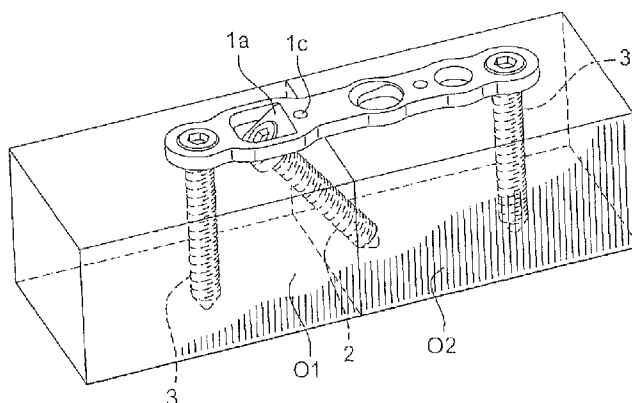

(56)

References Cited

U.S. PATENT DOCUMENTS

3,534,731 A	10/1970	Muller	2003/0195516 A1	10/2003	Sterett et al.
3,552,389 A	1/1971	Allgower et al.	2003/0199875 A1	10/2003	Mingozzi et al.
3,779,240 A	12/1973	Kondo	2004/0059334 A1	3/2004	Weaver et al.
RE28,841 E	6/1976	Allgower et al.	2004/0092929 A1	5/2004	Zindrick
4,388,921 A	6/1983	Sutter et al.	2004/0093081 A1	5/2004	Nilsson et al.
4,408,601 A	10/1983	Wenk	2004/0097950 A1	5/2004	Foley et al.
RE31,628 E	7/1984	Allgower et al.	2004/0167522 A1	8/2004	Niederberger et al.
4,493,317 A	1/1985	Klaue	2004/0172028 A1	9/2004	Roger
4,503,737 A	3/1985	DiGiovanni	2004/0181228 A1	9/2004	Wagner et al.
4,513,744 A	4/1985	Klaue	2004/0186477 A1	9/2004	Winquist et al.
4,651,724 A	3/1987	Berentey et al.	2004/0210234 A1	10/2004	Coillard-Lavirotte et al.
4,800,874 A	1/1989	David et al.	2004/0214137 A1	10/2004	Walton
4,957,496 A	9/1990	Schmidt	2004/0236332 A1	11/2004	Frigg
4,988,350 A *	1/1991	Herzberg 606/65	2005/0015089 A1	1/2005	Young et al.
5,105,690 A	4/1992	Lazzara et al.	2005/0070904 A1	3/2005	Gerlach et al.
5,304,180 A	4/1994	Slocum	2005/0080421 A1	4/2005	Weaver et al.
5,347,894 A	9/1994	Fischer	2005/0085913 A1	4/2005	Fraser et al.
5,487,741 A	1/1996	Maruyama et al.	2005/0090825 A1	4/2005	Pfefferle et al.
5,662,655 A	9/1997	Laboureaux et al.	2005/0171544 A1 *	8/2005	Falkner 606/69
5,667,510 A	9/1997	Combs	2005/0182408 A1	8/2005	Pfefferle et al.
5,674,222 A	10/1997	Berger et al.	2005/0277937 A1	12/2005	Leung et al.
5,709,686 A	1/1998	Talos et al.	2005/0277941 A1	12/2005	Trumble et al.
5,810,822 A	9/1998	Mortier	2006/0004362 A1	1/2006	Patterson et al.
5,827,285 A	10/1998	Bramlet	2006/0015102 A1	1/2006	Toullec et al.
5,853,413 A	12/1998	Carter et al.	2006/0058796 A1	3/2006	Hartdegen et al.
5,904,684 A	5/1999	Rooks	2006/0106387 A1	5/2006	Fanger et al.
5,931,839 A	8/1999	Medoff	2006/0149261 A1	7/2006	Nilsson et al.
6,146,382 A	11/2000	Hurlbert	2006/0173459 A1	8/2006	Kay et al.
6,183,475 B1	2/2001	Lester et al.	2006/0200145 A1	9/2006	Kay et al.
6,348,052 B1	2/2002	Sammarco	2006/0235397 A1	10/2006	Sanders et al.
6,379,359 B1	4/2002	Dahners	2006/0241607 A1	10/2006	Myerson et al.
6,383,186 B1	5/2002	Michelson	2006/0241608 A1	10/2006	Myerson et al.
6,533,786 B1	3/2003	Needham et al.	2006/0241609 A1	10/2006	Myerson et al.
6,544,266 B1	4/2003	Roger et al.	2007/0142920 A1	6/2007	Niemi
6,565,570 B2	5/2003	Sterett et al.	2007/0233106 A1	10/2007	Horan et al.
6,576,018 B1	6/2003	Holt	2007/0270850 A1	11/2007	Geissler
6,623,486 B1	9/2003	Weaver et al.	2008/0015593 A1	1/2008	Pfefferle et al.
6,626,907 B2	9/2003	Campbell et al.	2008/0051791 A1	2/2008	Young et al.
6,669,700 B1	12/2003	Farris et al.	2008/0091197 A1	4/2008	Coughlin
6,669,701 B2	12/2003	Steiner et al.	2008/0114360 A1	5/2008	Da Frota Carrera
6,692,503 B2	2/2004	Foley et al.	2008/0132960 A1	6/2008	Weaver et al.
6,712,820 B2	3/2004	Orbay	2008/0161860 A1	7/2008	Ahrens et al.
6,719,759 B2	4/2004	Wagner et al.	2008/0208262 A1	8/2008	Butler et al.
6,730,091 B1	5/2004	Pfefferle et al.	2008/0249572 A1 *	10/2008	Tandon 606/280
6,764,489 B2	7/2004	Ferree	2008/0249573 A1	10/2008	Buhren et al.
6,960,211 B1	11/2005	Pfefferle et al.	2009/0024173 A1	1/2009	Reis, Jr.
7,037,342 B2	5/2006	Nilsson et al.	2009/0036933 A1	2/2009	Dube et al.
7,044,951 B2 *	5/2006	Medoff et al. 606/71	2009/0093849 A1	4/2009	Grabowski
7,108,697 B2	9/2006	Mingozzi et al.	2009/0118769 A1	5/2009	Sixto, Jr. et al.
7,137,987 B2	11/2006	Patterson et al.	2009/0198285 A1	8/2009	Raven, III
7,179,260 B2 *	2/2007	Gerlach et al. 606/291	2009/0210010 A1	8/2009	Strnad et al.
7,326,218 B2	2/2008	Sterett et al.	2009/0210011 A1	8/2009	Den Hartog et al.
7,341,589 B2	3/2008	Weaver et al.	2009/0210013 A1	8/2009	Kay et al.
7,344,538 B2	3/2008	Myerson et al.	2009/0228048 A1	9/2009	Duncan et al.
D587,370 S	2/2009	Coillard-Lavirotte et al.	2009/0234359 A1	9/2009	Onoue et al.
7,491,220 B2	2/2009	Coughlin	2009/0275987 A1	11/2009	Graham et al.
D596,294 S	7/2009	Coillard-Lavirotte et al.	2009/0306724 A1	12/2009	Leither et al.
7,695,472 B2	4/2010	Young	2009/0312759 A1	12/2009	Ducharme et al.
7,766,948 B1	8/2010	Leung	2010/0016900 A1	1/2010	Terres et al.
7,771,457 B2	8/2010	Kay et al.	2010/0057214 A1	3/2010	Graham et al.
D623,745 S	9/2010	Kay et al.	2010/0121324 A1	5/2010	Tyber et al.
7,799,061 B2	9/2010	Kay et al.	2010/0121325 A1	5/2010	Tyber et al.
7,819,903 B2	10/2010	Fraser et al.	2010/0125300 A1	5/2010	Blitz et al.
7,857,836 B2	12/2010	Huebner et al.	2010/0160973 A1	6/2010	Leung
7,931,680 B2	4/2011	Myerson et al.	2010/0217328 A1	8/2010	Terrill et al.
8,080,010 B2	12/2011	Schulz et al.	2010/0256638 A1	10/2010	Tyber et al.
8,100,954 B2	1/2012	Kay et al.	2010/0256639 A1	10/2010	Tyber et al.
8,100,983 B2	1/2012	Schulte	2010/0274293 A1	10/2010	Terrill et al.
8,852,246 B2 *	10/2014	Hansson 606/286	2010/0305618 A1	12/2010	Kay et al.
2001/0011172 A1	8/2001	Orbay et al.	2010/0324556 A1	12/2010	Tyber et al.
2001/0047172 A1	11/2001	Foley et al.	2011/0004253 A1	1/2011	Fraser et al.
2002/0045901 A1	4/2002	Wagner et al.	2011/0009866 A1	1/2011	Johnson et al.
2002/0183752 A1	12/2002	Steiner et al.	2011/0087229 A1	4/2011	Kubiak et al.
2003/0040748 A1 *	2/2003	Aikins et al. 606/70	2011/0087295 A1	4/2011	Kubiak et al.
2003/0060827 A1	3/2003	Coughlin	2011/0092981 A1	4/2011	Ng et al.
			2011/0093017 A1	4/2011	Prasad et al.
			2011/0093018 A1	4/2011	Prasad et al.
			2011/0118739 A1	5/2011	Tyber et al.
			2011/0125153 A1	5/2011	Tyber et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2011/0213367	A1	9/2011	Tyber et al.
2011/0218535	A1	9/2011	Wang et al.
2011/0230884	A1	9/2011	Mantzaris et al.
2011/0264148	A1	10/2011	Prandi et al.
2011/0306976	A1	12/2011	Kubiak et al.
2011/0306977	A1	12/2011	Michel et al.

FOREIGN PATENT DOCUMENTS

DE	3630862	A1	3/1988
EP	0 705 572	A2	4/1996
EP	1707227	A2	10/2006
EP	1897509	A1	3/2008
FR	590290	B	3/1925
FR	590290	A	6/1925



FR	2362616	A1	3/1978
FR	2764183	A1	12/1998
FR	2846870	A1	5/2004
FR	2912895	A1	8/2008
WO	9516403	A1	6/1995
WO	9528887	A1	11/1995
WO	9605778	A1	2/1996
WO	02098306	A1	12/2002
WO	2007131287	A1	11/2007

OTHER PUBLICATIONS

Manual of Small Animal Fracture Repair and Management, Jan. 1, 1998, pp. 80-81.

Vitallium Screw-Plate-Systems of Prof. R. Judet, 12 pages, 1974, Howmedica International, Inc. Shannon Industrial Estate, Co. Clare, Ireland.

* cited by examiner

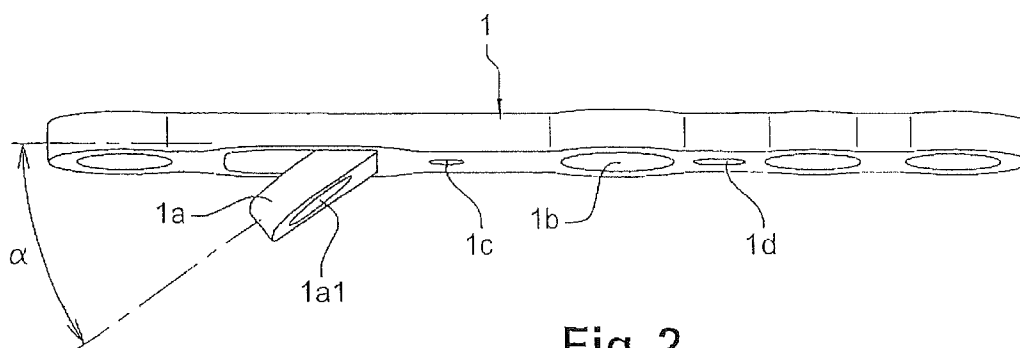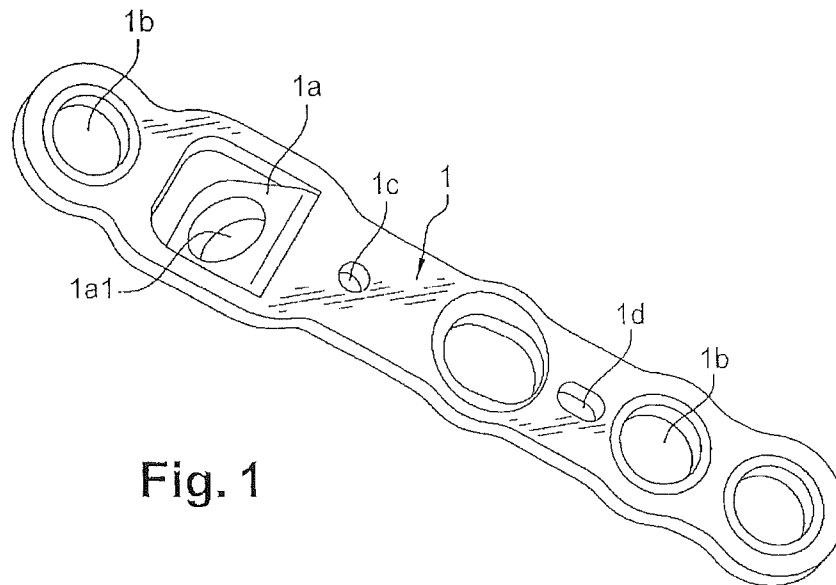

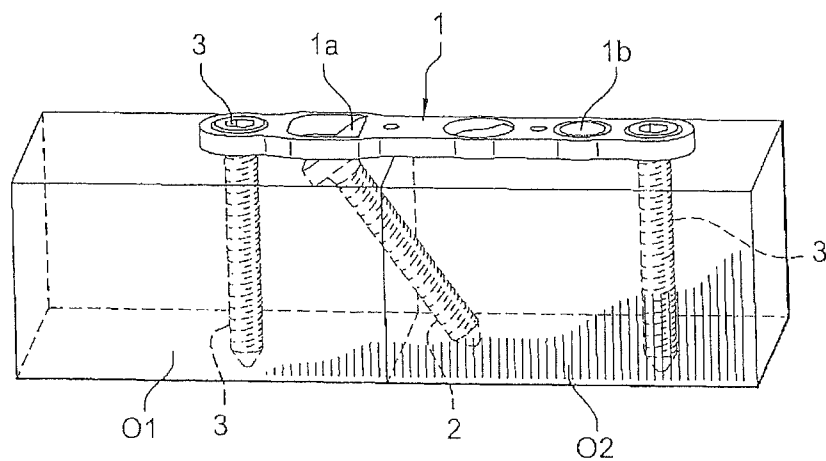


Fig. 3

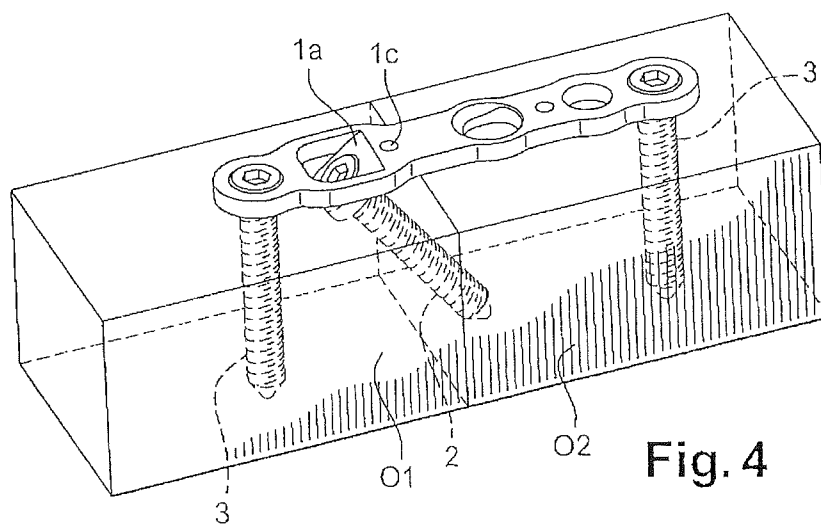


Fig. 4

1

ORTHOPEDIC IMPLANT IN THE FORM OF A PLATE TO BE FIXED BETWEEN TWO BONE PARTS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. application Ser. No. 12/918,071, filed on Oct. 29, 2010, which is a national phase entry under 35 U.S.C. §371 of International Application No. PCT/FR2009/051879, filed Oct. 2, 2009, published in French, which claims priority from French Patent Application No. 0856694, filed Oct. 2, 2008, all of which are incorporated herein by reference in their entireties.

BACKGROUND OF THE INVENTION

The invention relates to the technical field of orthopedic implants.

More particularly, the invention relates to a plate for arthrodesis or osteosynthesis adapted to be fixed between two bone parts.

In a manner known to one having ordinary skill in the art, this type of plate generally has holes for engaging screws, allowing arthrodesis between two bones or osteosynthesis between two bone fragments. This is, for example, the case for bones of the hand or foot, without however excluding other applications, particularly in the field of the spine. Depending on the pathology to be treated, these plates can have a general rectilinear or other geometric shapes.

From this state of the art, one of the objects the invention proposes to attain is to improve, in a sure and efficient manner, compression in a precise direction between the bone parts subjected to the plate.

To attain the given object to enhance the compression between the two relative bone parts, according to the invention, the plate has a formation that orients at least one screw at an angle with respect to a plane defined by the plate, the angle being between about 30° and 60°.

According to an advantageous embodiment, the formation is a tab that is angled according to an angle between 30° and 60°, and having a hole for engaging the screw. The angled tab results from a cut out and a deformation of a portion of the plate.

In another embodiment, the formation is a hole angled at an angle between 30° and 60° for engaging the screw.

Considering the problem to be solved, the formation is located on a determined portion of the length of the plate so that the screw ensures the compression of the two bone parts.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is described hereinafter in more detail, with reference to the attached drawings in which:

FIG. 1 is a perspective view of an embodiment of the plate;

FIG. 2 is a side view of the plate;

FIGS. 3 and 4 are perspective views showing the mounting of the plate between two bone parts and their orientation by means of the plate according to the invention, the bone parts being shown schematically.

DETAILED DESCRIPTION

According to the invention, the plate 1 has at least one formation 1a adapted to enable the positioning of at least one screw 2, at an angle α of between 30° and 60° with respect to a plane of the plate (FIG. 2).

2

In one embodiment, the formation 1a is an angled tab cut out and deformed from the plate. For example, the deformation is made with a cutting-punching operation. This angled tab has a hole 1a1 for screw 2. The angled tab 1a is positioned along the length of the plate so that after the screw 2 is fitted to it, the screw ensures the compression together of the two bone parts, as indicated below in the description.

In another embodiment, to allow for an angular orientation of the screw 2 according to an angle between about 30° and 60°, the formation 1a can be formed as an angled hole. It must be noted that the tab 1a enables adaptation of the angle as a function of the pathology to be treated, given that it is possible to deform this tab at will. In other words, the angle can be adjusted over a few degrees directly by the surgeon in the operating room, using an appropriate tool.

With reference to FIGS. 3 and 4 that show the positioning of the plate 1 between two bone parts O1 and O2:

Once the osteotomies have been carried out, a template of the plate, which does not have a guide formation, enables the position of the tab to be determined.

After determining the position of the tab, the surgeon makes a corresponding recess with the appropriate rasp.

Once the plate having the tab has been positioned, the surgeon sets one or two screws 3, on a side of the site of the osteosynthesis or the arthrodesis toward the tab. A temporary fastening pin can, possibly, be positioned in a complementary lug.

The screw 2 is then engaged in the hole 1a1 of the tab 1a to place the fracture in compression.

Once the compression has been done, the surgeon can screw one or several other additional fastening screws 3 and remove the temporary pin.

In a known manner, this plate 1 has smooth and/or threaded holes for the fastening screws 3 set in the bone parts O1 and O2 to engage in, as shown in FIGS. 3 and 4.

Similarly, the plate 1 can have at least one hole 1c for a pin for temporarily positioning the plate 1. Advantageously, the plate 1 can have a guide 1c for the insertion of a pin on the side of one of the bone parts O1 and another guide 1d for the insertion of another pin on the side of the other bone part O2.

Considering the effect of the desired compression, such as indicated above, the guide 1c is a circular hole whose diameter corresponds substantially to that of the pin, whereas the other guide 1d can be an elongated slot.

These provisions thus enable the bone to slide under the plate 1 as the screws are set, while ensuring compression along a precise direction, generally axially or parallel to the plate. The pins are of any known and appropriate type, and perfectly known to one having ordinary skill in the art.

The plate 1 can have several shapes, so that the holes 1a in particular can be aligned or arrayed, all or in part, according to the corners of a triangle or of a quadrilateral. These provisions, in triangle or in quadrilateral, of the screws, improve the stability of the mounting.

It must be noted also that the plate 1, no matter its shape, can be longitudinally bent so as to adapt to the curvature of the bone, consequently enabling the screws to form an angle between them.

The advantages are readily apparent from the description.

The invention claimed is:

1. A method of fusing a joint, the method comprising: spanning first and second bones separated by a joint with a bone plate, such that a first hole of the bone plate is aligned with a first bone of the joint and a second hole of the bone plate is aligned with a second bone of the joint; inserting a first fixation member through the first hole of the plate and into the first bone of the joint;

3

inserting a second fixation member through the second hole of the plate and into the second bone of the joint; and

inserting a third fixation member through a fixation pathway of the plate, into the first bone, across the joint, and into the second bone, wherein the fixation pathway extends from a top surface of the plate and towards the second bone, and wherein the fixation pathway is arranged at least partially through an extension, at least a portion of which is positioned below a bottom surface of the plate and between first and second sides of the plate, wherein the fixation pathway terminates at an exit hole, and insertion of the third fixation member through the fixation pathway results in the third fixation member extending through the exit hole, across the joint, and into the second bone.

2. The method of claim 1, wherein insertion of the third fixation member through the fixation pathway includes inserting the third fixation member from the top surface of the plate directly into the exit hole.

3. The method of claim 1, wherein the fixation pathway is spaced apart from the extension so as to form a gap between the pathway and the extension.

4. The method of claim 1, wherein the extension is angled by about between 30° and 60° with respect to a longitudinal axis of the plate.

5. The method of claim 1, further comprising forming a cavity in the first bone with a tool, and positioning the extension at least partially within the cavity.

6. The method of claim 1, wherein the extension extends from the bottom surface of the bone plate.

7. The method of claim 1, wherein the plate includes a plurality of holes arranged according to the corners of a triangle or of a quadrilateral, and the method further comprises inserting fixation members into each of the plurality of holes so that some of the fixation members extend into the first bone while some of the fixation members extend into the second bone.

8. The method of claim 7, wherein the plate is curved so as to adapt to the curvature of at least one of the first and second bones, and the method further comprises inserting a plurality of fixation members into the plurality of holes so that at least one of the plurality of fixation members is angled with respect to another of the plurality of fixation members.

9. The method of claim 1, wherein the first and second holes are locking holes.

10. The method of claim 9, wherein the first and second holes include threading for engaging with the first and second fixation members.

11. The method of claim 1, wherein the fixation pathway includes non-threaded interior walls.

12. The method of claim 1, further comprising the step of inserting a first temporary fixation pin into a first pin hole in the plate to temporarily affix the plate to bone.

13. The method of claim 12, further comprising the step of inserting a second temporary fixation pin into a second pin hole in the plate to temporarily affix the plate to bone.

14. The method of claim 13, further comprising the step of axially translating the second fixation pin within the second pin hole during compression of the first and second bones.

15. The method of claim 14, wherein the second pin hole is an elongate slot.

16. The method of claim 1, wherein the extension is a tab angled relative to a longitudinal axis of the plate.

17. A method of fusing together first and second bone parts, the method comprising:

4

forming a cavity in at least one of the first and second bone parts;

associating a bone plate with the first and second bone parts, such that the bone plate spans across the first and second bone parts and at least a first hole of the bone plate is aligned with the first bone part;

inserting a first fixation member through the first hole and into the first bone part;

positioning an extension of the plate at least partially within the cavity, the extension being recessed at least partially below a bottom surface of the plate; and

inserting a second fixation member through a fixation pathway of the plate, into the first bone part, across a divide between the bone parts, and into the second bone part, the fixation pathway extending from a top surface of the plate downwards towards the extension, the fixation pathway being arranged at least partially through the extension, wherein the fixation pathway terminates at an exit hole, and insertion of the second fixation member through the fixation pathway results in the second fixation member extending through the exit hole, across the divide between the bone parts, and into the second bone.

18. The method of claim 17, wherein the bone plate includes holes for fixation members on either side of the extension.

19. The method of claim 17, wherein insertion of the second fixation member through the fixation pathway includes inserting the second fixation member from the top surface of the plate directly into the exit hole.

20. The method of claim 17, wherein the exit hole is formed through the extension.

21. The method of claim 20, wherein the fixation pathway includes non-threaded interior walls.

22. The method of claim 20, further comprising inserting a third fixation member through a third hole in the plate and into at least one of the first and second bone parts.

23. The method of claim 17, wherein the first and second bone parts are separated by a joint, and the method further comprises inserting a third fixation member through a third hole in the plate and into the second bone part.

24. The method of claim 23, wherein insertion of the second fixation member through the fixation pathway includes inserting the second fixation member across the joint.

25. The method of claim 17, wherein the first hole is a locking hole.

26. The method of claim 17, wherein a central axis of the second hole diverges from a central axis of the first hole.

27. The method of claim 26, further comprising associating a template of the bone plate with at least one of the first and second bone parts to determine the positioning of the extension.

28. The method of claim 27, wherein the template does not include an extension.

29. The method of claim 17, wherein the plate includes a set of pin holes adapted to receive temporary fixation pins, a first of the pin holes having an axis extending into the first bone part, and a second of the pin holes having an axis extending into the second bone part.

30. The method of claim 29, further comprising inserting first and second temporary fixation pins into each of the first and second pin holes, and axially translating the second fixation pin within the second pin hole during compression of the first and second bone parts.

31. The method of claim 20, wherein the extension is angled by about between 30° and 60° with respect to a longitudinal axis of the plate.

5

32. A method of fusing a joint, the method comprising:
spanning first and second bones separated by a joint with a
bone plate, such that a first hole of the bone plate is
aligned with a first bone of the joint and a second hole of
the bone plate is aligned with a second bone of the joint;
inserting a first fixation member through the first hole of the
plate and into the first bone of the joint;
inserting a second fixation member through the second
hole of the plate and into the second bone of the joint;
and
inserting a third fixation member through a third hole in the
plate, into the first bone, across the joint, and into the
second bone so that a free end of the third fixation
member, not attached to any portion of the plate, resides
in the second bone and a head of the third fixation mem-
ber is seated in the third hole, the third hole being angled
relative to a longitudinal axis of the plate through a
thickness of the plate, wherein the third fixation member
is the only fixation member extending across the joint.

33. The method of claim 32, wherein the third hole is
angled by about between 30° and 60° with respect to the
longitudinal axis of the plate.

34. The method of claim 32, wherein the first and second
holes are locking holes.

6

35. The method of claim 34, wherein the first and second
holes are threaded.

36. The method of claim 32, wherein the plate includes a
plurality of holes arranged according to the corners of a
triangle or of a quadrilateral, and the method further com-
prises inserting fixation members into each of the plurality of
holes so that some of the fixation members extend into first
bone while some of the fixation members extend into the
second bone.

37. The method of claim 36, wherein the plate is curved so
as to adapt to the curvature of at least one of the first and
second bones, and the method further comprises inserting a
plurality of fixation members into the plurality of holes so that
at least one of the plurality of fixation members is angled with
respect to another of the plurality of fixation members.

38. The method of claim 37, further comprising the step of
inserting a temporary fixation pin into a hole in the plate to
temporarily affix the plate to bone.

39. The method of claim 32, wherein the joint is one of the
anatomical joints of the human body in the foot or hand.

40. The method of claim 1, wherein the joint is one of the
anatomical joints of the human body in the foot or hand.

* * * * *